



UltiMod

The UltiMod series from Excelsys - the Ultimate range of Modular Configurable Power Supplies

- **Unique in Flexibility**
- **Unrivalled in Performance**
- **Ultra Cost Competitive**



Unique in Flexibility, Unrivalled in Performance, Ultra Cost Competitive

FEATURES & OPTIONS

- Dual Safety Approvals
 - UL/EN60950 2nd edition
 - UL/EN60601-1 3rd edition
- Highest Efficiency - up to 92%
- User & Field Configurable
- Standard Medical Features
 - Leakage Current <300µA (<150µA optional)
 - 2 MOPP
 - 4KV Isolation
- Lowest Acoustic Noise
- -40°C Startup Temperature
- Extra Ruggedised as Standard
 - Shock: >60G's
 - Vibration: MIL STD-810G
- No Minimum Load
- Extra low profile <1U height
- All outputs fully floating
- Series / Parallel of multiple outputs
- 5V Isolated standby voltage
- Product Options: Conformal Coating, Low Leakage Current, Connector, Cabling & Mounting options and Reverse Fans

TYPICAL APPLICATIONS

- Medical; Clinical diagnostic equipment, Medical lasers, Dialysis equipment, Radiological Imaging, Clinical Chemistry
- Industrial; Test and Measurement, Industrial Machines, Automation equipment, Printing, Telecommunications, Audio equipment

The UltiMod Series from Excelsys - the **Ultimate** range of Modular Configurable Power Supplies provides up to 1200W output power in a compact 1U form factor. The series is designed for **highest efficiencies** and consists of two Input AC front ends (*powerPacs*), UX4 and UX6 and 11 DC output *powerMods* (XgA to XgL).

Both *powerPacs* carry **dual safety certification**, EN60950 for Industrial Applications and EN60601-1 3rd Edition for Medical Applications. The UX4 delivers up to 600W and can be populated with up to 4 *powerMods*, the UX6 delivers up to 1200W and can be populated with up to 6 *powerMods*.

The *powerMods* provide up to 12 fully isolated DC outputs ranging from 1.0V to 58V. Users can select the modules most suitable for their application based on power level and/or desired control feature set. The series provides **unique levels of flexibility** and is completely user field configurable. Customers can configure any combination of *powerMods* in series/parallel. This unique flexibility combined with our Industry leading **5 Year Warranty** minimises the total cost of ownership for our customers.

The UltiMod Series of modular configurable power supplies provides global leadership in product reliability, efficiency and cost effectiveness.




UltiMod powerPacs

	Model	Slots	Power	Medical Approval UL/EN60601-1 3rd edition	Industrial Approval UL/EN60950 2nd edition
UX	UX4	4	600W	Yes	Yes
	UX6	6	1200W	Yes	Yes

UltiMod powerMods

Model	Vnom (V)	Set Point Adjust Range (V)	Dynamic Vtrim Range (V)	I _{max} (A)	Power (W)	Remote Sense	Power Good
XgA	12.0	10.8-15.6	-	12.5	150	-	-
XgB	24.0	19.2-26.4	-	8.3	200	-	-
XgC	36.0	28.8-39.6	-	5.6	200	-	-
XgD	48.0	38.5-50.4	-	4.2	200	-	-
XgE	24.0	5.0-28.0	-	5.0	120	-	Yes
XgF	24.0	5.0-28.0	-	3.0	72	-	Yes
	24.0	5.0-28.0	-	3.0	72	-	Yes
XgG	2.5	1.5-3.6	1.0-3.6	40.0	100	Yes	Yes
XgH	5.0	3.2-6.0	1.5-6.0	36.0	180	Yes	Yes
XgJ	12.0	6.0-15.0	4.0-15.0	18.3	220	Yes	Yes
XgK	24.0	12.0-30.0	8.0-30.0	9.2	220	Yes	Yes
XgL	48.0	24.0-58.0	8.0-58.0	5.0	240	Yes	Yes




INPUT					
Parameter	Conditions/Description	Min	Nom	Max	Units
Input Voltage Range	Universal Input 47-440Hz	85 120		264 380	VAC VDC
Power Rating	UX4: See derating curves page 4 UX6: See derating curves page 4		600 1200		W W
Input Current UX4 UX6	85VAC in 400W out 85VAC in 850W out		7.5 11.5		A
Inrush Current	230VAC @ 25°C			25	A
Undervoltage Lockout	Shutdown	65		74	VAC
Fusing UX4 UX6	250V 250V		F8A HRC F12A HRC		
OUTPUT					
Parameter	Conditions/Description	Min	Nom	Max	Units
powerMod Power	As per powerMod table				
Output Adjustment Range	Manual: Multi-turn potentiometer. As per powerMod table Dynamic: As per powerMod table				
Minimum Load			0		A
Load & Cross Regulation	For 25% to 75% load change			±0.2	%
Transient Response	For 25% to 75% load change: Voltage Deviation; XgA-XgD Settling Time: XgA-XgD Voltage Deviation: XgE-XgL Settling Time: XgE-XgL			2.5 500 10 250	% µs % µs
Ripple and Noise	20MHz 100mV or 1.0% pk-pk (except 150mV XgA)				
Overvoltage Protection	Latching	110	120	150	%
Overcurrent Protection	Straight line with hiccup activation at <30% of Vnom.	110	133	160	%
Line Regulation	For ±10% change from nominal line			±0.1	%
Remote Sense	Max. line drop compensation (except XgA, B, C, D, E, F)			0.5	VDC
Overshoot				2	%
Rise Time	Monotonic		15		ms
Turn-on Delay	From AC in and Global Enable powerMod Enable		300 2		ms ms
Hold-up Time	For nominal output voltages at full load.	15		20	ms
Output Isolation	Output to Output/Output to Chassis	500 / 500			VDC
GENERAL					
Parameter	Conditions/Description	Min	Nom	Max	Units
Isolation Voltage	Input to Output Input to Chassis	4000 1500			VAC VAC
Efficiency	230VAC, 1200W @ 24V		90	92	%
Safety Agency Approvals	EN60601-1 3rd Edition, UL60601-1, CSA601, UL File No. E230761 EN60950 2nd Edition, CSA C22.2 No. 60950-1, UL File No. E181875				
Leakage Current	250VAC, 60Hz, 25°C 250VAC, 60Hz, 25°C (Option 04)			300 150	µA µA
Signals	See Page 4				
Bias Supply	Always on, current 500mA	4.8	5.0	5.2	VDC
MTBF	UX4 with two XgA's @ full load. Telecordia SR-332, Issue 1 May 2001, ground benign, ambient temperature of 40°C	670			kHours
EMC					
Parameter	Standard	Level		Units	
Emissions					
Conducted	EN55011, EN55022, FCC		Level B		
Radiated	EN55011, EN55022, FCC		Level B		
Harmonic Distortion	EN61000-3-2 Class A		Compliant		
Flicker & Fluctuation	EN61000-3-3		Compliant		
Immunity					
Electrostatic Discharge	EN61000-4-2		Level 2		
Radiated Immunity	EN61000-4-3		Level 3		
Fast Transients-Burst	EN61000-4-4		Level 3		
Input Line Surges	EN61000-4-5		Level 3		
Conducted Immunity	EN61000-4-6		Level 3		
Voltage Dips	EN61000-4-11		Compliant		
ENVIRONMENTAL					
Parameter	Conditions/Description	Min	Nom	Max	Units
Operating Temperature	Operates to specification below -20°C after 10 min warm-up	-40		+70	°C
Storage Temperature		-40		+85	°C
Derating	See Page 4 for full temperature deratings				
Relative Humidity	Non-condensing	5		95	%RH
Shock		60			G
Vibration	MIL-STD810G				Hz
Altitude	Up to 3000m (10000ft)				


Output Connectors

The output *powerMods* connection details are shown below. Type A connectors are for single output *powerMods* XgA to XgL. The Type B connector is for the Dual output XgF *powerMod*. The power and signal connectors are as follows:

Type A: *powerMods* XgA to XgE XgG to XgL



Type B: *powerMod* XgF



Output Signals and Power Connector Pinout

Pin	J3	J3	J3	J3	J4	J4
Module	(XgA to XgD)	(XgG to XgL)	(XgE)	(XgF)	(Type A)	(Type B)
1	not used	+Sense	not used	-pg (V2)	-Vout	-V2
2	Common	-Sense	not used	+pg (V2)	+Vout	+V2
3	not used	Vtrim	not used	Inhibit (V2)		-V1
4	not used	Itrim	Common	Common (V2)		+V1
5	+Inhibit	+Inhibit/Enable	-pg	-pg (V1)		
6	-Inhibit	-Inhibit/Enable	+pg	+pg (V1)		
7	not used	+pg	Inhibit	Inhibit (V1)		
8	not used	-pg	Common	Common (V1)		


Output Mating Connectors

J3: Locking Molex 51110-0860; Non Locking Molex 51110-0850; Crimp Terminal: Molex p/n 50394.

J4: M4 Screw

Series Connection

To achieve increased output voltages, simply series outputs using standard series links, paying attention to the requirements to maintain SELV levels if required in your system.




Series Links available.
Part Number XS1

Parallel Connection for *powerMods* XgA to XgL

To achieve increased current capacity, simply parallel outputs using the standard parallel links. Excelsys 'wireless' sharing ensures that current hogging is not possible. To parallel connect outputs:

1. Switch on IShare switch to ON for *powerMods* XgG - XgL or add jumper to current share header LK1 for *powerMods* XgA-XgD.
2. Connect Negative Parallel Link.
3. Adjust output voltages of *powerMods* to within 5mV of each other.
4. Connect Positive Parallel Link.



Parallel Links available to
order. Part Number XP1

DIP Switch for Current Share & Inhibit/Enable for *powerMods* XgG to XgL




Dip Switch settings above are:

Current Share: OFF

Inhibit ON: Normally ON

LK1 for Current Share on *powerMods* XgA to XgD

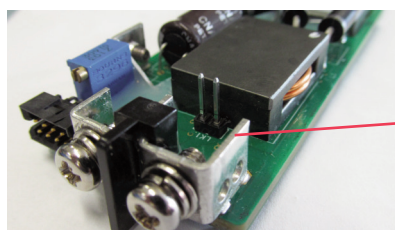

LK1 (Attach jumper here)


Recommended Jumper for LK1: HARWIN M7567-05
(Jumper Socket, Black, 2.54mm, 2-way)

DIP Switch Option for XgG to XgL

powerMods can be configured to be normally ON or normally OFF by appropriate setting of the DIP switch on the *powerMod*. (default mode is normally ON). The *powerMod* will deliver output voltage when mains is applied (and the *powerPac* is enabled). The *powerMod* requires an external 5V signal (between +IN/EN and -IN/EN) to disable the output pins. This may be reversed by setting of the dip switch to the OFF position.

Input Connectors

The UltiMod series has a variety of input connector options to ease system integration. These include IEC, Input cables (3-wire) and IEC to Screw Terminal Adaptor.

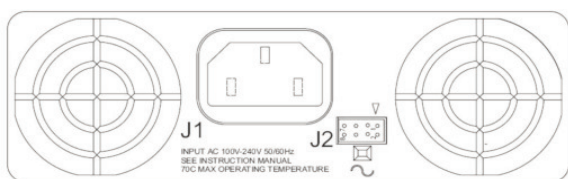

Pin	J1	J2
1	Line	Common
2	Neutral	+5V Bias
3	Earth	not used
4		AC Fail
5		Fan Fail
6		Global Enable
7		Temp Alarm
8		Global Inhibit

Input Mating Connectors

J1: IEC320 type female plug rated 13, Locking IEC cable and connector: Schaffner EMC part number IL13-US1-SVT-3100-183.


J2: Locking Molex 51110-0850; Non Locking 51110-0860; Crimp Terminal: Molex p/n 50394

Input Cable (Option D)

The UltiMod Series is also available with an input cable connection option allowing greater flexibility when mounting the UltiMod in the system. Input cables are 300mm in length and come supplied with Faston connectors.

IEC to Screw Terminal Adaptor

Some applications may require a screw terminal input rather than the standard IEC320 connector provided with the UltiMod. For such applications, Excelsys can offer the XE1, the IEC to Screw terminal adaptor accessory plug. This is a press fit connector that plugs securely into the UltiMod *powerPac* and provides the system integrator with screw terminals for mains connection.



UltiMod Mounting Options


To ease system integration there are three methods of mounting the UltiMod in a system.

1. Base Plate Mounting

The unit can be mounted in the system via the mounting holes present on the base. See mechanical drawings for mounting hole positions. Use M4 mounting screws. Ensure that maximum screw penetration from base does not exceed 6mm.

2. Fleximount - side mounting clip



Using the side mounting clips accessory shown. The clip can be positioned at the user defined position along the slide rail on the side of the UltiMod. The clip is then mounted to the system base plate. Use M4 mounting screws to fix mounting clip to system base. Excelsys part number Z165.



3. Fleximount - self clenching studs


Using the slide rail on side of the UltiMod, self clenching studs can be placed at a user defined position. Recommend: PEM FH-M4-X or FH-832-X or equivalent.

Derating Curves

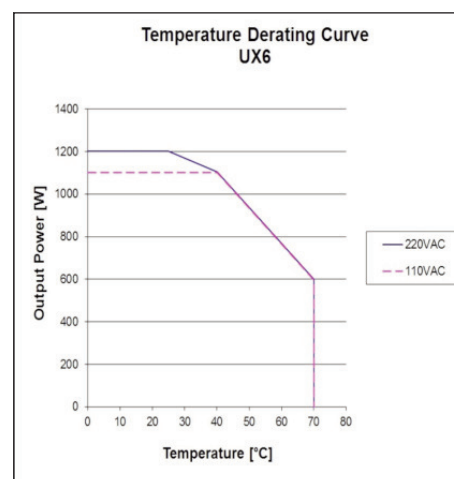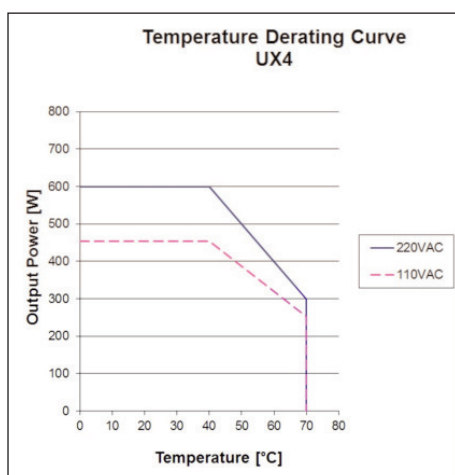


Mechanical Drawings


UX4: 4 Slot UltiMod powerpac

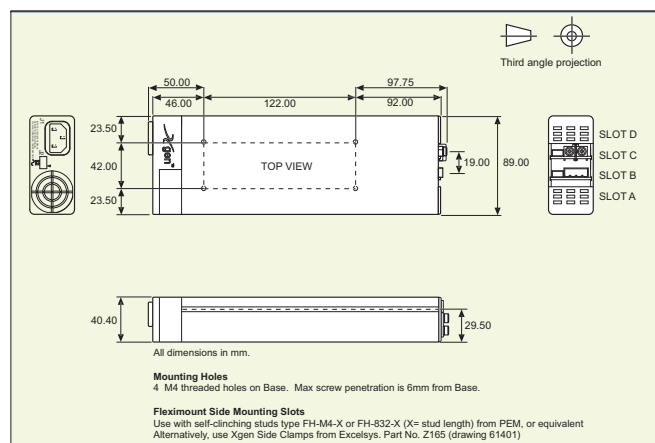

UX6: 6 Slot UltiMod powerpac

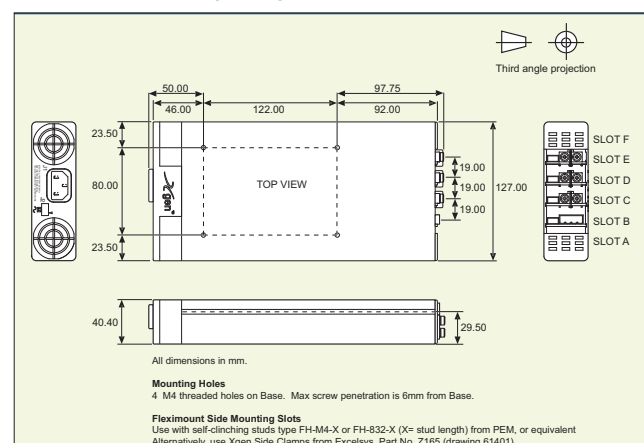

Configuring your UltiMod

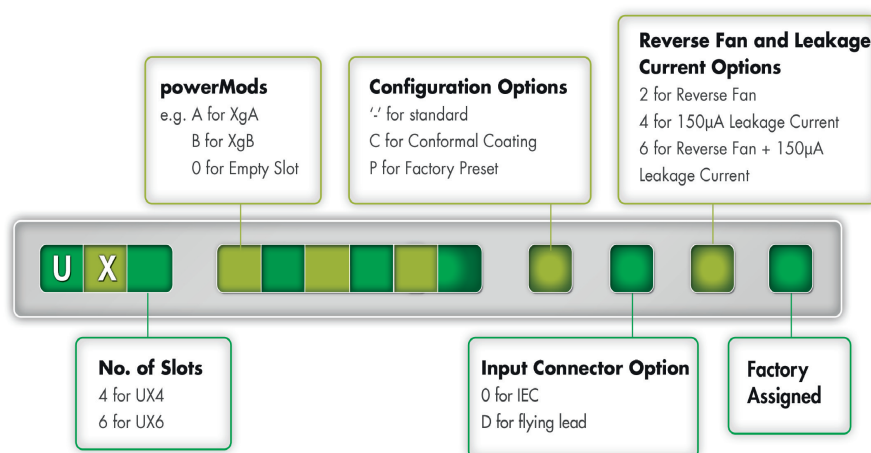

Configuration Example 1: UX4CGD0-D4 contains;

UX4 powerPac: 600W 4-slot chassis, Standard module settings:

Slot 1: XgC: 36V/5.6A

Slot 2: XgG: 2.5V/40A

Slot 3: XgD: 48V/4.2A

Slot 4: Empty

Option D: Input cable option; Option 4: 150µA leakage current option.

Configuration Example 2: UX4CGD0PD4B contains;

UX4 powerPac: 600W 4-slot chassis, Factory preset module settings:

Slot 1: XgC: 32V/5.6A XgC output voltage factory adjusted to 32V

Slot 2: XgG: 2.5V/40A

Slot 3: XgD: 46V/4.2A XgD output voltage factory adjusted to 46V

Slot 4: Empty

Option D: Input cable option; Option 4: 150µA leakage current option; B: Factory assigned unique identifier.

Configuration Example 3: UX6BBDDA0C02A contains;

UX6 powerPac: 1200W 6-slot chassis, Factory preset module settings:

Slot 1: XgB: 24V/8.3A (set in parallel with Slot 2)

Slot 2: XgB: 24V/8.3A (set in parallel with Slot 1)

Slot 3: XgD: 46V/4.2A XgD output voltage factory adjusted to 46V

Slot 4: XgD: 48V/4.2A

Slot 5: XgA: 12V/12.5A

Slot 6: Empty

Option C: Conformal Coated; Option 2: Reverse Fan; B: Factory assigned unique identifier.

Configure your UltiMod using our Online Configurator

Our Sales and Applications teams will be delighted to assist you in defining the best power supply for your application. You can also use our online configurator available at http://www.excelsys.com/xgen_configurator/configure.html.

Europe/Asia

Excelsys Technologies Ltd
27 Eastgate Drive
Eastgate Business Park
Little Island, Cork, Ireland
IRELAND

t: +353 21 4354716
f: +353 21 4354864
e: sales@excelsys.com

North America

Excelsys Technologies
519 Interstate 30, #309
Rockwall, TX 75087
USA

t: (972) 771 4544
f: (972) 421 1805
e: salesusa@excelsys.com