

TWTD Series — Full Size NEMA Pushbuttons

A4

Switches & Pilot Devices



TWTD Series: Heavy duty switches built to last

Key features include:

- Variety of button sizes up to 2 9/16" (65mm)
- Rugged construction includes chrome plated zinc locking ring die cast zinc mounting threads, screw mounted contact blocks
- LED or incandescent illumination
- Transformer or full voltage
- Transparent contact windows
- Slow make, double break self cleaning contacts
- Modular construction for maximum flexibility
- Double nickel plated terminal screws
- Available assembled or as sub-components
- NEMA 4x and IP65 watertight/oiltight panel
- Large M3.5 screw terminals with captive sems plate

The rugged series of TWTD switches offers both variety and durability in an attractive design.

With button sizes up to 2 9/16" (65mm), chrome plated zinc locking rings, die cast zinc mounting threads, steel anti-rotation rings, and self cleaning contacts, the TWTD's are here to stay.

The TWTD series also offers either LED or incandescent illumination in full voltage and transformer models.

Transparent contact windows allow the viewing of IDEC's self cleaning slow-make/slow-break contacts.

Regardless of your switching needs, the TWTD series provides the kind of long lasting, industrial strength quality you've come to expect from IDEC.



UL Listed
File No. E70646







SA® File No. LR48366



D Ref. No. 117617MC



Certificate No.
2005010305145658

| | | |
|---|--|---|
| Specifications | Conforming to Standards | EN60947-1, EN60947-5-1, VDE0660-200, UL508, CSA C22-2 No.14 |
| | Approvals |   UL Listed File No. E70646 File No. LR48366   Ref. No. 117617MC |
| | Operating Temperature | Operation: -25 to +50°C (without freezing) Storage: -40 to +70°C (without freezing) |
| | Vibration Resistance | 10 to 55Hz, 98m/sec ² (10g) conforming to IEC6068-2-6 |
| | Shock Resistance | 980m/sec ² (100g) conforming to IEC6068-2-7 |
| | Electric Shock Protection | Class 0 conforming to IEC60536 |
| | Degree of Protection | IP65 (from front of the panel) (conforming to IEC60529) IP54 (key switches) NEMA 1, 2, 3, 3R, 3S, 4, 4X, 5, 12, 13 (conforming to NEMA ICS6-110) |
| | Mechanical Life | Momentary pushbuttons: 5,000,000 (900 operations per hour) All other switches: 500,000 |
| | Pollution Degree (conforming to IEC60947-1) | 3 for switches not using a transformer 2 for switches using a transformer |
| | Mechanical-Electrical Specifications | Rated Operational Characteristics |
| Rated Insulation Voltage | | 600V |
| Rated Switching Over-Voltage | | Less than 4kV, conforming to IEC60947-1 |
| Rated Impulse Withstanding Voltage | | 4kV for contact circuit 2.5kV for lamp circuit |
| Rated Thermal Current | | 10 Amp |
| Minimum Switching Capacity | | 5 mA at 3V AC/DC |
| Contact Operation | | Slow break NC or NO, self-cleaning |
| Operating Force | | Flush and extended pushbuttons—with 1NO or 1NC contact: 6.2±2N (momentary), 7.0±2N (maintained) Additional contacts—1NO or 1NC: +3.2N (momentary), + 3.3N (maintained) |
| Terminal Referencing | | Conforming to CENELEC EN50005 |
| Recommended Terminal Torque | | 0.8 N m (7.1 in lb.) |
| External Short-Circuit Protection | | 10A 250V fuse conforming to IEC60269-1 |
| Applicable Wire Size | | Minimum 1 x 22 AWG, max. 2 x 14 AWG or 1 x 12 AWG |
| Contact Resistance | | Initial contact resistance of 50mΩ or less |
| Contact Gap | | 4mm (NO and NC) 2mm (NO-EM and NC-LB) |
| Lamp Ratings | | Incandescent: 1 W LEDs: 6, 12, 24V: 20mA / 120, 240V: 10mA |
| Maximum Inrush Current | | 40 A (40 msec) |
| Contact Material | Silver | |

| | | | | | | | | | |
|------------------------|---|--|--|-----|-----|------|------|------|------|
| Contact Ratings | Contact Ratings by Utilization Category IEC 60947-5-1 | | AC-15 (A600) DC-13 (P600) | | | | | | |
| | Contact Ratings by Utilization Category | | | | | | | | |
| | Operational Voltage | | | 24V | 48V | 50V | 110V | 220V | 440V |
| | Operation Current | AC 50/60 Hz | AC-12 Control of resistive loads & solid state loads | 10A | — | 10A | 10A | 6A | 2A |
| | | | AC-15 Control of electromagnetic loads (> 72VA) | 10A | — | 7A | 5A | 3A | 1A |
| DC | DC | DC-12 Control of resistive loads & solid state loads | 8A | 5A | — | 2.2A | 1.1A | — | |
| | | DC-13 Control of electromagnets | 5A | 2A | — | 1.1A | 0.6A | — | |

Non-Illuminated Pushbuttons (Assembled)

A4

Switches & Pilot Devices



Assembled Pushbuttons

A B () D 1 10 N - B

| | |
|--|--|
| <p>Function _____</p> <p>B: Momentary O: Maintained V: Pushlock Turn Reset Y: Push-Pull</p> <p>Bezel Shape _____</p> <p>Blank: Octagonal F: Full Shroud G: Mushroom Shroud P: Neoprene Boot</p> <p>Series Designation _____</p> <p>D: TWTD Series</p> | <p>Button Color</p> <p>B: Black G: Green R: Red S: Blue W: White Y: Yellow</p> <p>Contact Arrangement</p> <p>10: 1NO 01: 1NC 20: 2NO 02: 2NC 11: 1NO-1NC 22: 2NO-2NC</p> <p>Button Shape</p> <p>1: Flush 2: Extended 3: Mushroom Ø 40mm 4: Jumbo Mushroom Ø 65mm</p> |
|--|--|

1. Use only when interpreting part numbers. Do not use for developing part numbers.
2. Custom contact configurations available, contact IDEC for details.

Non-Illuminated Pushbuttons (Assembled) con't

Part Numbers: Non-Illuminated Pushbuttons

| Style | Contacts | Part Number | |
|--|-------------------------------------|--|--|
| | | Momentary | Maintained |
| Flush | 1NO 1NC 1NO-1NC 2NO 2NC | ABD110N-① ABD101N-① ABD111N-① ABD120N-① ABD102N-① | AOD110N-① AOD101N-① AOD111N-① AOD120N-① AOD102N-① |
| Extended | 1NO 1NC 1NO-1NC 2NO 2NC | ABD210N-① ABD201N-① ABD211N-① ABD220N-① ABD202N-① | AOD210N-① AOD201N-① AOD211N-① AOD220N-① AOD202N-① |
| Extended with Neoprene Boot | 1NO 1NC 1NO-1NC 2NO 2NC | ABPD210N-① ABPD201N-① ABPD211N-① ABPD220N-① ABPD202N-① | AOPD210N-① AOPD201N-① AOPD211N-① AOPD220N-① AOPD202N-① |
| Recessed | 1NO 1NC 1NO-1NC 2NO 2NC | ABFD110N-① ABFD101N-① ABFD111N-① ABFD120N-① ABFD102N-① | AOFD110N-① AOFD101N-① AOFD111N-① AOFD120N-① AOFD102N-① |
| Extended with Full Shroud | 1NO 1NC 1NO-1NC 2NO 2NC | ABFD210N-① ABFD201N-① ABFD211N-① ABFD220N-① ABFD202N-① | AOFD210N-① AOFD201N-① AOFD211N-① AOFD220N-① AOFD202N-① |
| Ø 40mm Mushroom Head | 1NO 1NC 1NO-1NC 2NO 2NC | ABD310N-① ABD301N-① ABD311N-① ABD320N-① ABD302N-① | AOD310N-① AOD301N-① AOD311N-① AOD320N-① AOD302N-① |
| Ø 40mm Mushroom Head with Full Shroud | 1NO 1NC 1NO-1NC 2NO 2NC | ABGD310N-① ABGD301N-① ABGD311N-① ABGD320N-① ABGD302N-① | AOGD310N-① AOGD301N-① AOGD311N-① AOGD320N-① AOGD302N-① |
| Ø 65mm Jumbo Mushroom Head | 1NO 1NC 1NO-1NC 2NO 2NC | ABD410N-① ABD401N-① ABD411N-① ABD420N-① ABD402N-① | AOD410N-① AOD401N-① AOD411N-① AOD420N-① AOD402N-① |
| Ø 65mm Jumbo Mushroom Head with Shallow Shroud | 1NO 1NC 1NO-1NC 2NO 2NC | ABGD410N-① ABGD401N-① ABGD411N-① ABGD420N-① ABGD402N-① | AOGD410N-① AOGD401N-① AOGD411N-① AOGD420N-① AOGD402N-① |
| Ø 65mm Jumbo Mushroom Head With Deep Shroud | 1NO 1NC 1NO-1NC 2NO 2NC | ABFD410N-① ABFD401N-① ABFD411N-① ABFD420N-① ABFD402N-① | AOFD410N-① AOFD401N-① AOFD411N-① AOFD420N-① AOFD402N-① |



1. In place of ①, specify the Button Color Code.
2. For sub-assembly part numbers, see next page.
3. For accessories, see page A4-188.
4. † Neoprene boot available only in Black (B), Green (G), Red (R) and Yellow (Y).

① Button Color Code

| Color | Code |
|--------|------|
| Black | B |
| Green | G |
| Red | R |
| Blue | S |
| White | W |
| Yellow | Y |



1. 65mm Jumbo mushroom not available in white.
2. Neoprene boot is not available in blue or white.







Non-Illuminated Pushbuttons (Sub-Assembled)







A4

Switches & Pilot Devices

Part Numbers: Operators

| Style | Part Number | |
|--|-------------|------------|
| | Momentary | Maintained |
| Flush/Extended  | ABD-100 | AOD-100 |
| Extended with Full Shroud  | ABFD-200 | AOFD-200 |
| Ø 40mm Mushroom/ Ø 65mm Jumbo Mushroom  | ABD-300 | AOD-300 |
| Ø 40mm Mushroom with Full Shroud  | ABGD-300 | AOGD-300 |
| Ø 65mm Jumbo Mushroom with Shallow Shroud  | ABGD-400 | AOGD-400 |
| Ø 65mm Jumbo Mushroom with Deep Shroud  | ABFD-400 | AOFD-400 |


Part Numbers: Buttons and Lenses

| Style | Part Number |
|--|-------------|
| Flush  | ABD1BN-① |
| Extended  | ABD2BN-① |
| Ø 40mm Mushroom  | ABD3BN-① |
| Ø 65mm Jumbo Mushroom  | ABD4BN-① |



In place of ①, specify the Button Color Code. (See table previous page)

Part Numbers: Contact Blocks

| Description | Part Number | |
|--|-------------------------------------|-------------------------------------|
| | 1NO | 1NC |
|  | BST-010 BST-010S (early make) | BST-001 BST-001S (late break) |
| Dummy Block | BST-D | |



1. Dummy blocks (no contacts) are used with an odd number of contact blocks.
2. Combining BST-010S and BST-001S result in overlapping contacts.

E-Stops (Assembled)



A4

Switches & Pilot Devices

Assembled E-Stops

A V (L) D 3 (99) 11 (D) N - R - (24V)

Function

V: Pushlock Turn Reset
Y: Push-Pull

Illumination

Blank: None
L: Illuminated

Series Designation

D: TWTD Series

Button/Lens Size

3: 40mm Mushroom

Illuminated Circuit (illuminated unit only)

99: Full Voltage (lamp determines voltage)
126: 120V AC Step Down Transformer
246: 240V AC Step Down Transformer
486: 480V AC Step Down Transformer

Lamp Voltage

(full voltage illuminated units only)

6V: 6V AC/DC
12V: 12V AC/DC
24V: 24V AC/DC
120V: 120V AC/DC
240V: 240V AC/DC

Button/Lens Color

A: Amber R: Red W: White
G: Green S: Blue Y: Yellow

Lamp Type (illuminated units only)

Blank: Incandescent
D: LED

Contact Arrangement






10: 1NO 01: 1NC
20: 2NO 02: 2NC
11: 1NO/1NC 22: 2NO/2NC



1. Use only when interpreting part numbers. Do not use for developing part numbers.
2. Custom contact configurations available, contact IDEC for details.

E-Stops (Assembled)

Part Numbers: E-Stop Switches

| Style | Contacts | Part Number |
|---|-------------------------------------|--|
| A4 Ø 40mm Pushlock Turn Reset  | 1NO 1NC 1NO-1NC 2NO 2NC | AVD310N-R* AVD301N-R* AVD311N-R* AVD320N-R* AVD302N-R* |
| Ø 40mm Illuminated Pushlock Turn Reset  | 1NO-1NC 2NO 2NC | AVLD39911⑤N-R-③* AVLD39920⑤N-R-③* AVLD39902⑤N-R-③* |
| Ø 40mm Push-Pull  | 1NO 1NC 1NO-1NC 2NO 2NC | AYD310N-① AYD301N-① AYD311N-① AYD320N-① AYD302N-① |
| Ø 40mm Push-Pull  | 1NO-1NC 2NO 2NC | AYLD39911⑤N-②-③** AYLD39920⑤N-②-③** AYLD39902⑤N-②-③** |
| Ø 40mm Momentary Push-Pull (3-position)  | 1NO-1NC 1NC-1LB† | AYLD229911⑤N-②-③-TK962 AYLD229902S⑤N-②-③-TK962 |
| | 1NO-1NC 1NC-1LB† | AYLD22 ④ 11⑤N-②-TK962 AYLD22 ④ 02S⑤N-②-TK962 |

3 Position Push-Pull

| Contact | Push | Center | Pull |
|------------------|------|--------|------|
| NC (BST-001) | 0 | 0 | X |
| NC-LB (BST-001S) | 0 | X | X |
| NO (BST-010) | X | 0 | 0 |
| NO-EM (BST-010S) | X | X | 0 |



- In place of ①, specify the button color code.
- In place of ②, specify the lens color code.
- In place of ③, specify the Full Voltage (lamp voltage) Code.
- In place of ④, specify the transformer voltage code.
- In place of ⑤, specify the Lamp Type code.
- *Available in red only.
- 3 position push-pull available in spring return to center only.
- † The most common configuration for motor starting applications.
- For accessories, see page A4-188.
- For dimensions, see page A4-192.

① Button Color Code

| Color | Code |
|--------|------|
| Black | B |
| Green | G |
| Red | R |
| Blue | S |
| Yellow | Y |

② LED Color Codes

| Color | Code |
|-------|------|
| Amber | A |
| Green | G |
| Red | R |
| Blue | S |
| White | W |

③ Full Voltage Code

| Voltage | Code |
|-----------|-----------------|
| 6V AC/DC | 6V |
| 12V AC/DC | 12V |
| 24V AC/DC | 24V |
| 120V AC | 120V |
| 240V AC | 240V (LED only) |

④ Transformer Voltage Codes

| Voltage | Code |
|---------|------|
| 120VAC | 126 |
| 240VAC | 246 |
| 480VAC | 486 |



Transformers step down to 6V.

⑤ Lamp Type Code

| Lamp | Code |
|--------------|-------|
| Incandescent | Blank |
| LED | D |

Part Numbers: Unibody E-Stops

| Style | Contacts | Part Number |
|---|----------------|--|
| Ø 40mm Pushlock Turn Reset (available in Red only)  | 1NO-1NC 2NC | HN1E-BV4F11-R* HN1E-BV4F02-R* |
| Illuminated Ø 40mm Pushlock Turn Reset (available in Red only)  | 1NO-1NC 2NC | HN1E-LV4F11Q⑤-R-③ HN1E-LV4F02Q⑤-R-③ |



- * Available in Red only.
- **Not available in blue.
- In place of ③, specify Full Voltage Code.
- With single unit construction, the positive action contacts are integrated in the body of the switch. This provides an extra degree of safety and reliability for critical emergency stop functions.
- For nameplates and accessories, see page A3-96.
- For dimensions, see page A3-100.
- For sub-assembly part numbers, see next page.
- HN1E series E-stops comply with EN418, the IEC "E-Stop Addendum to the Low Voltage Directive," this includes "tamper proof" operation whereby a change of contact state is not possible by "teasing" or "floating" the operator.

E-Stops (Sub-Assembled)

Transformer* + Operator + Lamp + Button/Lens = Complete Part



*Not required for full voltage units (full voltage clips used instead).

Part Numbers: Operators

| | Style | Part Number |
|--|-------|------------------------|
| Ø 40mm Pushlock Turn Reset | | AVD-300 |
| Illuminated Ø 40mm Pushlock Turn Reset | | AVLD3-0600N |
| Ø 40mm Push-Pull | | AYD-3100 |
| Illuminated Ø 40mm Push-Pull | | 2 pos AYLD-0600 |
| | | 3 pos AYLD22TK962-0B01 |

Part Numbers: Buttons and Lenses

| | Style | Part No. |
|--|-------|-----------------|
| Button for Pushlock Turn Reset E-Stop (Ø 40mm, red only) | | AVN3B-R |
| Lens for Illuminated Pushlock Turn Reset E-Stop (Ø 40mm, red only) | | AVLN3LU-R |
| Button for Push-Pull E-Stop (Ø 40mm) | | AYD3BN-① |
| Lens for Illuminated Push-Pull E-Stop (Ø 40mm) | | 2 pos* AYLD3L-② |
| | | 3 pos AYLD2L-② |

- In place of ①, specify the Button Color Code. (See table below)
- In place of ②, specify the LED Color Code.
- *Not available in blue.

Part Numbers: Lamps

| Type | Voltage | Part Number |
|--------------|-----------|-------------|
| LED | 6V AC/DC | LSTD-6② |
| | 12V AC/DC | LSTD-1② |
| | 24V AC/DC | LSTD-2② |
| | 120V AC | LSTD-H2② |
| | 240V AC | LSTD-M4② |
| Incandescent | 6V AC/DC | IS-6 |
| | 12V AC/DC | IS-12 |
| | 24V AC/DC | IS-24 |
| | 120VAC | L-120L |



- In place of ②, specify the LED color code.
- The LED contains a current-limiting resistor and a protection diode.

① Button Color Code

| Color | Code |
|--------|------|
| Black | B |
| Green | G |
| Red | R |
| Blue | S |
| Yellow | Y |

② LED Color Codes

| Color | Code |
|-------|------|
| Amber | A |
| Green | G |
| Red | R |
| Blue | S |
| White | W |

Part Numbers: Contact Blocks

| Description | Part Number | |
|-------------------|-----------------------|-----------------------|
| | 1N0 | 1NC |
| All Control Units | | |
| | BST-010 | BST-001 |
| | BST-010S (early make) | BST-001S (late break) |
| | Dummy Blocks | BST-D |



- Dummy blocks (no contacts) are used with an odd number of contact blocks.
- Combining BST-010S and BST-001S result in overlapping contacts (remain on, or closed, when switch is moved between two positions).

Part Numbers: Full Voltage Clips

| Primary Voltage (50/60Hz) | Part Number |
|--|-------------|
| Full Voltage Clips (2 req'd for each unit) | APD-F |

Part Numbers: Transformers

| Description | Primary Voltage (50/60Hz) | Part Number |
|-------------|---------------------------|-------------|
| | 120V AC | TWD-0126 |
| | 240V AC | TWD-0246 |
| | 480V AC | TWD-0486 |



6V secondary voltage (uses 6V lamp).

A4

Switches & Pilot Devices

Pilot Lights (Assembled)

A4

Switches & Pilot Devices



Assembled Pilot Lights



A P D 1 126 D N - R - ()

| | | |
|---|--|--|
| <p>Function P: Pilot Light</p> <p>Series Designation D: TWTD Series</p> <p>Lens Shape 1: Dome</p> <p>Rated Operational Voltage (Primary) Transformer Type 126:120V AC 246:240V AC 486:480V AC</p> | <p>Full Voltage Type 99:Full Voltage</p> | <p>Lamp Voltage (Full Voltage Only) 6V: 6V AC/DC 12V:12V AC/DC 24V:24V AC/DC 120V:120V AC 240V: 240V AC (LED only)</p> <p>Lens Color Code A: Amber G: Green R: Red S: Blue W: White Y: Yellow</p> <p>Lamp Type Blank: Incandescent Lamp D: LED Lamp</p> |
|---|--|--|



Use only when interpreting part numbers. Do not use for developing part numbers.

Part Numbers: LED and Incandescent Pilot Lights

| Style | Operating Voltage | Part Number | |
|--|-------------------------------|---|--|
| | | LED | Incandescent |
|  Transformer Dome | 120V AC 240V AC 480V AC | APD1126DN-② APD1246DN-② APD1486DN-② | APD1126N-② APD1246N-② APD1486N-② |
|  Full Voltage Dome | — | APD199DN-②-③ | APD199N-②-③ |

② Lens Color Code

| Color | Code |
|--------|------|
| Amber | A |
| Green | G |
| Red | R |
| Blue | S |
| White | W |
| Yellow | Y |

③ Full Voltage Code

| Voltage | Code |
|--------------------|------|
| 6V AC/DC | 6V |
| 12V AC/DC | 12V |
| 24V AC/DC | 24V |
| 120V AC | 120V |
| 240V AC (LED only) | 240V |



- In place of ②, specify the Lens/LED Color Code.
- In place of ③, specify the Full Voltage Code (lamp voltage).



Pilot Lights (Sub-Assembled)


Transformer* + Operator + Lamp + Lens = Complete Part




Note: Not required for full voltage units (full voltage clips used instead).


Part Numbers: Operators

| Style | Part Number |
|---|-------------|
| Full Voltage  | APD-199 |
| AC Adaptor/Transformer  | APD-006 |



 The lens, lamp, and transformer/adaptor or the full voltage clips must be ordered separately.


Part Numbers: Lenses

| Style | Part Number |
|--|-------------|
| Dome Lens  | APN106L-② |


 1. In place of ②, specify the Lens Color Code.
2. LED and incandescent lenses differ in shade only. Some colors have only one shade.


Part Numbers: Lamps

| Type | Voltage | Part Number |
|---|--------------|-------------|
| LED  | 6V AC/DC | LSTD-6② |
| | 12V AC/DC | LSTD-1② |
| | 24V AC/DC | LSTD-2② |
| | 120V AC | LSTD-H2② |
| | 240V AC | LSTD-M4② |
| Incandescent  | 6.3V AC/DC | IS-6 |
| | 12V AC/DC | IS-12 |
| | 24V AC/DC | IS-24 |
| | 120VAC, 1-8W | L-120L |


 1. In place of ②, specify the LED color code.
2. The LED contains a current-limiting resistor and a protection diode.


Part Numbers: Full Voltage Clips

| Primary Voltage (50/60Hz) | Part Number |
|--|-------------|
|  | APD-F |

 Required for all full voltage models. Two pieces each.

Part Numbers: Transformers

| Description | Primary Voltage (50/60Hz) | Part Number |
|---|---------------------------|-------------|
| Transformers  | 120V AC | TWD-0126 |
| | 240V AC | TWD-0246 |
| | 480V AC | TWD-0486 |

 6V secondary voltage (use 6V lamp).

② Lens/LED Color Code

| Color | Code |
|--------|------|
| Amber | A |
| Green | G |
| Red | R |
| Blue | S |
| White | W |
| Yellow | Y |

A4

Switches & Pilot Devices

Illuminated Pushbuttons (Assembled)



A4

Switches & Pilot Devices

Assembled Illuminated Pushbuttons

A L () D 2 126 11 (D) N - R - ()

Function

L: Momentary Action
OL: Alternate Action

Bezel Shape

Blank: Octagonal
F: Full Shroud

Series Designation

D: TWTD Series

Lens Shape

2: Extended
3: Mushroom Ø 40mm

Rated Operational Voltage (Primary)

Transformer Full Voltage Type
126:120V AC 99:Full Voltage
246:240V AC
486:480V AC

Lamp Voltage (Full Voltage Only)

6V: 6V AC/DC
12V: 12V AC/DC
24V: 24V AC/DC
120V:120V AC
240V: 240V AC (LED only)

Lens Color Code

A: Amber
G: Green
R: Red
S: Blue
W: White
Y: Yellow

Lamp Type

Blank: Incandescent Lamp
D: LED

Contact Arrangement




20: 2NO 02: 2NC
11: 1NO-1NC



1. Use only when interpreting part numbers. Do not use for developing part numbers.
2. All transformers and AC Adaptors step down to 6V.

Illuminated Pushbuttons (Assembled) con't

Part numbers: Illuminated Pushbuttons

| Style | | Contacts | Part Number | |
|---|--------------|-----------------------|---|--|
| | | | Momentary | Maintained |
|  Extended Lens | Full Voltage | 1NO-1NC 2NO 2NC | ALD29911⑤N-②-③ ALD29920⑤N-②-③ ALD29902⑤N-②-③ | AOLD29911⑤N-②-③ AOLD29920⑤N-②-③ AOLD29902⑤N-②-③ |
| | Transformer | 1NO-1NC 2NO 2NC | ALD2 ④ 11⑤N-② ALD2 ④ 20⑤N-② ALD2 ④ 02⑤N-② | AOLD2 ④ 11⑤N-② AOLD2 ④ 20⑤N-② AOLD2 ④ 02⑤N-② |
|  Extended Lens with Full Shroud | Full Voltage | 1NO-1NC 2NO 2NC | ALFD29911⑤N-②-③ ALFD29920⑤N-②-③ ALFD29902⑤N-②-③ | AOLFD29911⑤N-②-③ AOLFD29920⑤N-②-③ AOLFD29902⑤N-②-③ |
| | Transformer | 1NO-1NC 2NO 2NC | ALFD2 ④ 11⑤N-② ALFD2 ④ 20⑤N-② ALFD2 ④ 02⑤N-② | AOLFD2 ④ 11⑤N-② AOLFD2 ④ 20⑤N-② AOLFD2 ④ 02⑤N-② |
|  Ø 40mm Mushroom Lens | Full Voltage | 1NO-1NC 2NO 2NC | ALD39911⑤N-②-③ ALD39920⑤N-②-③ ALD39902⑤N-②-③ | AOLD39911⑤N-②-③ AOLD39920⑤N-②-③ AOLD39902⑤N-②-③ |
| | Transformer | 1NO-1NC 2NO 2NC | ALD3 ④ 11⑤N-② ALD3 ④ 20⑤N-② ALD3 ④ 02⑤N-② | AOLD3 ④ 11⑤N-② AOLD3 ④ 20⑤N-② AOLD3 ④ 02⑤N-② |



- In place of ②, specify the Lens Color Code.
- In place of ③, specify the Full Voltage Code (lamp voltage).
- In place of ④, specify the Transformer Voltage Code.
- In place of ⑤, specify the Lamp Type Code.

② Lens Color Codes

| Color | Code |
|--------|------|
| Amber | A |
| Green | G |
| Red | R |
| Blue | S |
| White | W |
| Yellow | Y |

③ Full Voltage Codes

| Voltage | Code |
|--------------------|------|
| 6V AC/DC | 6V |
| 12V AC/DC | 12V |
| 24V AC/DC | 24V |
| 120V AC | 120V |
| 240V AC (LED only) | 240V |

④ Transformer Voltage Codes

| Voltage | Code |
|---------|------|
| 120VAC | 126 |
| 240VAC | 246 |
| 480VAC | 486 |



6V secondary voltage
(uses 6V lamp).

⑤ Lamp Type Code

| Lamp | Code |
|--------------|-------|
| Incandescent | Blank |
| LED | D |

Illuminated Pushbuttons (Sub-Assembled)

Transformer* + Contact Block + Operator + Lamp + Lens = Complete Part

A4

Switches & Pilot Devices



* Not required for full voltage types (full voltage types use APD-F full voltage clips).

Part Numbers: Operators

| Style | Part Number | |
|-------------------------------|-------------|------------|
| | Momentary | Maintained |
| Extended | ALD-0600 | AOLD-0600 |
| Extended with Full Shroud | ALFD-0600 | AOLFD-0600 |
| 40mm Mushroom | ALD-0600 | AOLD-0600 |

Part Numbers: Lamps

| Type | Voltage | Part Number |
|------------------|-----------|----------------------|
| LED | 6V AC/DC | LSTD-6 ^② |
| | 12V AC/DC | LSTD-1 ^② |
| | 24V AC/DC | LSTD-2 ^② |
| | 120V AC | LSTD-H2 ^② |
| | 240V AC | LSTD-M4 ^② |
| Incandescent | 6V AC/DC | IS-6 |
| | 12V AC/DC | IS-12 |
| | 24V AC/DC | IS-24 |
| | 120VAC | L-120L |

② Lens/LED Color Codes

| Color | Code |
|--------|------|
| Amber | A |
| Green | G |
| Red | R |
| Blue | S |
| White | W |
| Yellow | Y |

Mushroom lens not available in yellow.

1. In place of ②, specify the LED Color code.
2. The LED contains a current-limiting resistor and a protection diode.

Part Numbers: Lenses

| Style | Part No. |
|---------------------|-----------------------|
| Extended | ALN06LU- ^② |
| Ø 40mm Mushroom | ALN3LU- ^② |

1. In place of ②, specify the Lens Color Code.
2. LED and incandescent lenses differ in shade only. Some colors have only one shade.

Part Numbers: Contact Blocks

| Description | Part Number | |
|-----------------------|----------------------------------|----------------------------------|
| | 1N0 | 1NC |
| All Control Units | BST-010 BST-010S (early make) | BST-001 BST-001S (late break) |
| Dummy Blocks | BST-D | |

1. Dummy blocks (no contacts) are used with an odd number of contact blocks.
2. Combining BST-010S and BST-001S result in overlapping contacts (remain on, or closed, when switch is moved between two positions).

Part Numbers: Full Voltage Clips

| Primary Voltage (50/60Hz) | Part Number |
|--|-------------|
| Full Voltage Clips (2 req'd for each unit) | APD-F |

Required for all full voltage models.

Part Numbers: Transformers

| Description | Primary Voltage (50/60Hz) | Part Number |
|------------------|---------------------------|-------------|
| Transformers | 120V AC | TWD-0126 |
| | 240V AC | TWD-0246 |
| | 480V AC | TWD-0486 |

6V secondary voltage (uses 6V lamp).

Non-Illuminated Selector Switches (Assembled)



**Knob Selector
(Non-illuminated)**



**Key Selector
(Non-illuminated)**



**Lever Selector
(Non-illuminated)**

A4

Switches & Pilot Devices

Assembled Selector Switches

A S D 2 () () 11 N - ()

| | |
|--|---|
| <p>Function _____</p> <p>S: Selector Switch</p> <p>Series Designation _____</p> <p>D: TWTD Series</p> <p>Number of Positions _____</p> <p>2: 2-Position 3: 3-Position</p> <p>Spring Return Action _____</p> <p>Blank: Maintained 1: Spring return from Right 2: Spring return from Left 3: 2-Way spring return from Left and Right</p> | <p>Circuit Number</p> <p>(See Circuit # column of Selector Switch Contact Arrangement Chart on beginning on A4-185.)</p> <p>Contact Arrangement Code</p> <p>10: 1NO 01: 1NC 20: 2NO 02: 2NC 40: 4NO 04: 4NC 11: 1NO-1NC 22: 2NO-2NC</p> <p>Operator Style Code</p> <p>Blank: Knob Operator L: Lever Operator K: Key Operator</p> |
|--|---|

Use only when interpreting part numbers. Do not use for developing part numbers.

Non-Illuminated Selector Switches (Assembled) con't

Part numbers: Non-Illuminated 2-Position Selector Switches

| Style | Contact | Mounting | Operator Position | | | Part Number | Part Number | Part Number |
|-------|------------|------------------|-------------------|------------------|----------------------|---|--|--|
| | | | L | R | | Maintained | Spring Return from Right | Spring Return from Left |
| | | | | | | | | |
| | 1NO | 1 2 | 0 0 | X 0 | Knob Lever Key | ASD210N ASD2L10N ASD2K10N | ASD2110N ASD21L10N ASD21K10N | ASD2210N ASD22L10N ASD22K10N |
| | 1NC | 1 2 | X 0 | 0 0 | Knob Lever Key | ASD201N-116 ASD2L01N-116 ASD2K01N-116 | ASD2101N-116 ASD21L01N-116 ASD21K01N-116 | ASD2201N-116 ASD22L01N-116 ASD22K01N-116 |
| | 1NO 1NC | 1 2 | 0 X | X 0 | Knob Lever Key | ASD211N ASD2L11N ASD2K11N | ASD2111N ASD21L11N ASD21K11N | ASD2211N ASD22L11N ASD22K11N |
| | 2NO | 1 2 | 0 0 | X X | Knob Lever Key | ASD220N ASD2L20N ASD2K20N | ASD2120N ASD21L20N ASD21K20N | ASD2220N ASD22L20N ASD22K20N |
| | 2NC | 1 2 | X X | 0 0 | Knob Lever Key | ASD202N-104 ASD2L02N-104 ASD2K02N-104 | ASD2102N-104 ASD21L02N-104 ASD21K02N-104 | ASD2202N-104 ASD22L02N-104 ASD22K02N-104 |
| | 2NO 2NC | 1 2 3 4 | 0 X 0 X | X 0 X 0 | Knob Lever Key | ASD222N ASD2L22N ASD2K22N | ASD2122N ASD21L22N ASD21K22N | ASD2222N ASD22L22N ASD22K22N |
| | 2NO 2NC | 1 2 3 4 | 0 0 X X | X X 0 0 | Knob Lever Key | ASD222N-111 ASD2L22N-111 ASD2K22N-111 | ASD2122N-111 ASD21L22N-111 ASD21K22N-111 | ASD2222N-111 ASD22L22N-111 ASD22K22N-111 |

Part Numbers: Non-Illuminated 3-Position Selector Switches

| Style | Contact | Mounting | Operator Position | | | | Part Number | Part Number | Part Number | Part Number |
|-------|------------|------------------|-------------------|------------------|------------------|----------------------|---|--|--|--|
| | | | L | C | R | | Maintained | Spring Return from Right | Spring Return From Left | Spring Return Two-Way |
| | | | | | | | | | | |
| | 2NO | 1 2 | X 0 | 0 0 | 0 X | Knob Lever Key | ASD320N ASD3L20N ASD3K20N | ASD3120N ASD31L20N ASD31K20N | ASD3220N ASD32L20N ASD32K20N | ASD3320N ASD33L20N ASD33K20N |
| | 2NC | 1 2 | 0 X | X X | X 0 | Knob Lever Key | ASD302N ASD3L02N ASD3K02N | ASD3102N ASD31L02N ASD31K02N | ASD3202N ASD32L02N ASD32K02N | ASD3302N ASD33L02N ASD33K02N |
| | 2NO 2NC | 1 2 3 4 | X 0 0 X | 0 0 X X | 0 X X 0 | Knob Lever Key | ASD322N ASD3L22N ASD3K22N | ASD3122N ASD31L22N ASD31K22N | ASD3222N ASD32L22N ASD32K22N | ASD3322N ASD33L22N ASD33K22N |
| | 2NO 2NC | 1 2 3 4 | X X 0 0 | 0 X X 0 | X 0 0 X | Knob Lever Key | ASD322N-309 ASD3L22N-309 ASD3K22N-309 | ASD3122N-309 ASD31L22N-309 ASD31K22N-309 | ASD3222N-309 ASD32L22N-309 ASD32K22N-309 | ASD3322N-309 ASD33L22N-309 ASD33K22N-309 |
| | 2NO 2NC | 1 2 3 4 | 0 0 0 0 | X X X 0 | 0 X 0 X | Knob Lever Key | ASD322N-310 ASD3L22N-310 ASD3K22N-310 | ASD3122N-310 ASD31L22N-310 ASD31K22N-310 | ASD3222N-310 ASD32L22N-310 ASD32K22N-310 | ASD3322N-310 ASD33L22N-310 ASD33K22N-310 |
| | 4NO | 1 2 3 4 | X 0 X 0 | 0 0 0 0 | 0 X 0 X | Knob Lever Key | ASD340N ASD3L40N ASD3K40N | ASD3140N ASD31L40N ASD31K40N | ASD3240N ASD32L40N ASD32K40N | ASD3340N ASD33L40N ASD33K40N |
| | 4NC | 1 2 3 4 | 0 X 0 X | X X X X | 0 0 X 0 | Knob Lever Key | ASD304N ASD3L04N ASD3K04N | ASD3104N ASD31L04N ASD31K04N | ASD3204N ASD32L04N ASD32K04N | ASD3304N ASD33L04N ASD33K04N |



1. The truth table indicates the operating position of contact block when the operator is switched to that position.

X = On (closed contacts) O = Off (open contacts)

X-X = Overlapping Contacts: Remain on (closed contacts) when switch is moved between these two positions.

2. All knob and lever selector switches come in black. Other colors are available by ordering the knob or lever separately.

3. Custom contact arrangements available, see page A4-185 or call IDEC for details.



Non-Illuminated Selector Switches (Sub-Assembled)

Contact Blocks + Operator + Knob or Lever* + Color Insert* = Complete Part †



- 1. * Not needed with key type switches.
- 2. † Knob type shown.

Part Numbers: Operators

| Appearance/ Position | Description | Part Number |
|---|---|----------------------------------|
| Knob & Lever  | 2 Maintained | ASD200 |
| | 2 Spring-Ret. from Right | ASD2100 |
| | 2 Spring-Ret. from Left | ASD2200 |
| | 3 Maintained, Cam 1 Maintained, Cam 2 | ASD300-1 ASD300-2 |
| | 3 Spring-Ret. from Right, Cam1 Spring-Ret. from Right, Cam 2 | ASD3100-1 ASD3100-2 |
| | 3 Spring-Ret. from Left, Cam 1 Spring-Ret. from Left, Cam 2 | ASD3200-1 ASD3200-2 |
| Key  | 2 Maintained | ASD2K00-RA |
| | 2 Spring-Ret. from Right | ASD21K00-RL |
| | 2 Spring-Ret. from Left | ASD22K00 |
| | 3 Maintained, Cam 1 Maintained, Cam 2 | ASD3K00-1-RA ASD3K00-2-RA |
| | 3 Spring-Ret. from Right, Cam1 Spring-Ret. from Right, Cam 2 | ASD31K00-1-RLC ASD31K00-2-RLC |
| | 3 Spring-Ret. from Left, Cam 1 Spring-Ret. from Left, Cam 2 | ASD32K00-1-RLC ASD32K00-2-RLC |
| 3 Spring-Ret. from L/R, Cam 1 Spring-Ret. from L/R, Cam 2 | ASD33K00-1-RC ASD33K00-2-RC | |

- 1. Order knobs, levers, color inserts separately (see below).
- 2. For key switches, keys are removable in all maintained positions. Other options available, contact IDEC for details.
- 3. See page A4-187 "Operator Truth Tables" for details of difference between cams.


① Color Codes

| Knob/Lever Color | Code |
|------------------|------|
| Black | B |
| Blue | S |
| Green | G |
| Red | R |
| Yellow | Y |
| White | W |


- 1. Knob/Lever not available in white.
- 2. Color inserts not available in Black.

Part Numbers: Handles and Inserts

| Style | Part Number |
|--|-------------|
| Knob  | ASDHHY - ① |
| Lever  | ASDHHL - ① |
| Color Insert  | TW-HC1 - ① |

 In place of ①, specify the Color Code.

Part Numbers: Contact Blocks

| Style | Part Number | |
|--|----------------------------------|----------------------------------|
| | 1N0 | 1NC |
|  | BST-010 BST-010S (early make) | BST-001 BST-001S (late break) |
| Dummy Blocks | BST-D | |

- 1. Dummy blocks (no contacts) are used with an odd number of contact blocks.
- 2. Combining BST-010S and BST-001S result in overlapping contacts (remain on, or closed, when switch is moved between two positions).

A4

Switches & Pilot Devices

Illuminated Selector Switches (Assembled)

A4

Switches & Pilot Devices



Assembled Illuminated Selector Switches

A SL D 2 (2) 126 11 D N - 111 - R - 24

Function

SL: Illuminated Selector Switch

Series Designation

D: TWTD Series

Number of Positions

2: 2-Position
3: 3-Position

Spring Return Action

Blank: Maintained
1: Spring return from Right
2: Spring return from Left
3: 2-Way spring return from Left and Right

Rated Operational Voltage (Primary)

| | |
|-------------|-------------------|
| Transformer | Full Voltage Type |
| 126:120V AC | 99: Full Voltage |
| 246:240V AC | |
| 486:480V AC | |

Contact Arrangement

| | |
|-------------|-------------|
| 20: 2NO | 02: 2NC |
| 40: 4NO | 04: 4NC |
| 11: 1NO-1NC | 22: 2NO-2NC |

Lamp Voltage (Full Voltage Only)

6V: 6V AC/DC
12V: 12V AC/DC
24V: 24V AC/DC
120V: 120V AC
240V: 240V AC (LED only)

Lens Color Code

A: Amber
G: Green
R: Red
S: Blue
W: White
Y: Yellow

Circuit Code Number

See Circuit # column of Selector Switch Contact Arrangement Charts on page A4-185.

Lamp Type

Blank: Incandescent
D: LED



Use only when interpreting part numbers. Do not use for developing part numbers.

Illuminated Selector Switches (Assembled) con't

Part Numbers: Illuminated 2-Position Selector Switches

| Contact | Style | | | | Operator Position | Maintained | Spring Return From Right | Spring Return From Left |
|------------|----------|-------------------|---|--------------------------|--|--|--|-----------------------------|
| | Mounting | Operator Position | | Transformer Full Voltage | | | | |
| | | L | R | | | | | |
| 1NO 1NC | 1 | 0 | X | transformer full voltage | ASLD2 ④11⑤N-② ASLD29911⑤N-②-③ | ASLD21 ④11⑤N-② ASLD219911⑤N-②-③ | ASLD22 ④11⑤N-② ASLD229911⑤N-②-③ | |
| | 2 | X | 0 | | | | | |
| 2NO | 1 | 0 | X | transformer full voltage | ASLD2 ④20⑤N-② ASLD29920⑤N-②-③ | ASLD21 ④20⑤N-② ASLD219920⑤N-②-③ | ASLD22 ④20⑤N-② ASLD229920⑤N-②-③ | |
| | 2 | 0 | X | | | | | |
| 2NC | 1 | X | 0 | transformer full voltage | ASLD2 ④02⑤N-104-② ASLD29902⑤N-104-②-③ | ASLD21 ④02⑤N-104-② ASLD219902⑤N-104-②-③ | ASLD22 ④02⑤N-104-② ASLD229902⑤N-104-②-③ | |
| | 2 | X | 0 | | | | | |
| 2NO 2NC | 1 | 0 | X | transformer full voltage | ASLD2 ④22⑤N-② ASLD29922⑤N-②-③ | ASLD21 ④22⑤N-② ASLD219922⑤N-②-③ | ASLD22 ④22⑤N-② ASLD229922⑤N-②-③ | |
| | 2 | X | 0 | | | | | |
| | 3 | 0 | X | | | | | |
| | 4 | X | 0 | | | | | |
| 2NO 2NC | 1 | 0 | X | transformer full voltage | ASLD2 ④22⑤N-11-② ASLD29922⑤N-11-②-③ | ASLD21 ④22⑤N-11-② ASLD219922⑤N-11-②-③ | ASLD22 ④22⑤N-11-② ASLD229922⑤N-11-②-③ | |
| | 2 | 0 | X | | | | | |
| | 3 | X | 0 | | | | | |
| | 4 | X | 0 | | | | | |

② Lens/LED Color Codes

| Color | Code |
|--------|------|
| Amber | A |
| Green | G |
| Red | R |
| Blue | S |
| White | W |
| Yellow | Y |

③ Full Voltage Codes

| Voltage | Code |
|--------------------|------|
| 6V AC/DC | 6V |
| 12V AC/DC | 12V |
| 24V AC/DC | 24V |
| 120V AC | 120V |
| 240V AC (LED only) | 240V |

④ Transformer Voltage Codes

| Voltage | Code |
|---------|------|
| 120VAC | 126 |
| 240VAC | 246 |
| 480VAC | 486 |

⑤ Lamp Type Code

| Lamp | Code |
|--------------|-------|
| Incandescent | Blank |
| LED | D |



6V secondary voltage (uses 6V lamps).

A4

Switches & Pilot Devices

Part Numbers: Illuminated 3-Position Selector Switches

| Contact | Style | | | | Operator Position | Maintained | Spring Return From Right | Spring Return From Left | Spring Return Two-Way |
|------------|----------|-------------------|---|---|--------------------------|---|---|---|---|
| | Mounting | Operator Position | | | | | | | |
| | | L | C | R | | | | | |
| 2NO | 1 | X | 0 | 0 | transformer full voltage | ASLD3 ④ 20⑤N-② ASLD39920⑤N-②-③ | ASLD31 ④ 20⑤N-② ASLD319920⑤N-②-③ | ASLD32 ④ 20D⑤N-② ASLD329920D⑤N-②-③ | ASLD33 ④ 20D⑤N-② ASLD339920D⑤N-②-③ |
| | 2 | 0 | 0 | X | | | | | |
| 2NC | 1 | 0 | X | X | transformer full voltage | ASLD3 ④ 02⑤N-② ASLD39902⑤N-②-③ | ASLD31 ④ 02⑤N-② ASLD319902⑤N-②-③ | ASLD32 ④ 02D⑤N-② ASLD329902D⑤N-②-③ | ASLD33 ④ 02D⑤N-② ASLD339902D⑤N-②-③ |
| | 2 | X | X | 0 | | | | | |
| 2NO 2NC | 1 | X | 0 | 0 | transformer full voltage | ASLD3 ④ 22⑤N-② ASLD39922⑤N-②-③ | ASLD31 ④ 22⑤N-② ASLD319922⑤N-②-③ | ASLD32 ④ 22D⑤N-② ASLD329922D⑤N-②-③ | ASLD33 ④ 22D⑤N-② ASLD339922D⑤N-②-③ |
| | 2 | 0 | 0 | X | | | | | |
| | 3 | 0 | X | X | | | | | |
| | 4 | X | X | 0 | | | | | |
| 2NO 2NC | 1 | X | 0 | X | transformer full voltage | ASLD3 ④ 22⑤N-309-② ASLD39922⑤N-309-②-③ | ASLD31 ④ 22⑤N-309-② ASLD319922⑤N-309-②-③ | ASLD32 ④ 22D⑤N-309-② ASLD329922D⑤N-309-②-③ | ASLD33 ④ 22D⑤N-309-② ASLD339922D⑤N-309-②-③ |
| | 2 | X | X | 0 | | | | | |
| | 3 | 0 | X | 0 | | | | | |
| | 4 | 0 | 0 | X | | | | | |
| 2NO 2NC | 1 | 0 | X | 0 | transformer full voltage | ASLD3 ④ 22⑤N-310-② ASLD39922⑤N-310-②-③ | ASLD31 ④ 22⑤N-310-② ASLD319922⑤N-310-②-③ | ASLD32 ④ 22D⑤N-310-② ASLD329922D⑤N-310-②-③ | ASLD33 ④ 22D⑤N-310-② ASLD339922D⑤N-310-②-③ |
| | 2 | 0 | 0 | X | | | | | |
| | 3 | 0 | X | 0 | | | | | |
| | 4 | 0 | 0 | X | | | | | |
| 4NO | 1 | X | 0 | 0 | transformer full voltage | ASLD3 ④ 40⑤N-② ASLD39940⑤N-②-③ | ASLD31 ④ 40⑤N-② ASLD319940⑤N-②-③ | ASLD32 ④ 40⑤N-② ASLD329940⑤N-②-③ | ASLD33 ④ 40⑤N-② ASLD339940⑤N-②-③ |
| | 2 | 0 | 0 | X | | | | | |
| | 3 | X | 0 | 0 | | | | | |
| | 4 | 0 | 0 | X | | | | | |
| 4NC | 1 | 0 | X | X | transformer full voltage | ASLD3 ④ 04⑤N-② ASLD39904⑤N-②-③ | ASLD31 ④ 04⑤N-② ASLD319904⑤N-②-③ | ASLD32 ④ 04⑤N-② ASLD329904⑤N-②-③ | ASLD33 ④ 04⑤N-② ASLD339904⑤N-②-③ |
| | 2 | X | X | 0 | | | | | |
| | 3 | 0 | X | X | | | | | |
| | 4 | X | X | 0 | | | | | |



1. In place of ②, specify the Lens/LED Color Code, in place of ③, specify the Full Voltage (lamp voltage) Code, in place of ④, specify the Transformer Voltage Code and in place of ⑤ specify the Lamp Type Code.

2. The truth table indicates the operating position of contact block when the operator is switched to that position.

X = On (Closed Contacts) O = Off (Open Contacts)

—X—X = Overlapping Contacts: Remain on (closed contacts) when switch is moved between these positions

Illuminated Selector Switches (Sub-Assembled)

Transformer* + Contact Block + Operator + Lamp + Lense = Complete Part




A4

Switches & Pilot Devices

*Not required for full voltage units (use APD-F full voltage clips instead).



Part Numbers: Operators

| Appearance/ Positions | Description | Part Number |
|---|---------------------------------|-------------|
|  | 2 Maintained | ASLD200 |
| | 3 Maintained, Cam 1 | ASLD300-1 |
| | 3 Maintained, Cam 2 | ASLD300-2 |
| | 2 Spring-Ret. from Right | ASLD2100 |
| | 2 Spring-Ret. from Left | ASLD2200 |
| | 3 Spring-Ret. from Right, Cam 1 | ASLD3100-1 |
| | 3 Spring-Ret. from Right, Cam 2 | ASLD3100-2 |
| | 3 Spring-Ret. from Left, Cam 1 | ASLD3200-1 |
| | 3 Spring-Ret. from Left, Cam 2 | ASLD3200-2 |
| | 3 Spring-Ret. from L/R, Cam 1 | ASLD3300-1 |
| 3 Spring-Ret. from L/R, Cam 2 | ASLD3300-2 | |

Part Numbers: Lenses


| Style | Part Number |
|---|-------------|
| Knob  | ASLNHU - ① |

Part Numbers: Lamps

| Type | Voltage | Part Number |
|---|------------|-------------|
|  | 6V AC/DC | LSTD-6② |
| | 12V AC/DC | LSTD-1② |
| | 24V AC/DC | LSTD-2② |
| | 120V AC | LSTD-H2② |
| | 240V AC | LSTD-M4② |
|  | 6.3V AC/DC | IS-6 |
| | 12V AC/DC | IS-12 |
| | 24V AC/DC | IS-24 |
| | 120VAC | L-120L |

1. In place of ②, specify the LED color code.
 2. The LED contains a current-limiting resistor and a protection diode.

Contact Blocks


| Description | Part Number | |
|--|-----------------------|-----------------------|
| | 1NO | 1NC |
|  | BST-010 | BST-001 |
| | BST-010S (early make) | BST-001S (late break) |
| | Dummy Blocks | BST-D |

1. Dummy blocks (no contacts) are used with an odd number of contact blocks.
 2. Combining BST-010S and BST-001S result in overlapping contacts (make before break).

Part Numbers: Full Voltage Clips

| Primary Voltage (50/60Hz) | Part Number |
|--|-------------|
| Full Voltage Clips (2 req'd for each unit) | APD-F |

Part Numbers: Transformers

| Description | Primary Voltage (50/60Hz) | Part Number |
|--|---------------------------|-------------|
|  | 120V AC | TWD-0126 |
| | 240V AC | TWD-0246 |
| | 480V AC | TWD-0486 |

6V secondary voltage

② Lens/LED Color Codes

| Color | Code |
|--------|------|
| Amber | A |
| Green | G |
| Red | R |
| Blue | S |
| White | W |
| Yellow | Y |

Contact Arrangement Charts

How to Read Contact Arrangement Charts

To determine contact block mounting position, first make sure the selector switch is oriented as shown on the right

Contact Arrangement

Type and quantity of switch contacts

Circuit Number

* N/D = No designation


Contact Block Mounting

Position or mounting contact blocks on operator

Operator Position

Truth table indicates the operating position of contact block when operator is switched to that position.

X = On (Closed Contacts)
O = Off (Open Contacts)
X-X = Overlapping Contacts: Remain on (closed) when switch is moved between these two positions



Contact Block Part Number

Part number to use when ordering sub-assembly contact blocks, as required for use with corresponding mounting position

Contact Arrangement Chart: 2-position Selector Switches

| Style | | Mounting Position | Operator Position | | Contact Block Part Number | Description | Operator Part Number | | | |
|------------------|----------------|-------------------|-------------------|---|---------------------------|------------------------------------|------------------------------------|---------------------------------|---------------------------------|---------------------------------|
| Contact | Circuit Number | | L | R | | | Maintained | Spring Ret. from Rt. | Spring Ret. from Lt. | |
| | | | L | R | | | | | | |
| | | | ↙ | ↗ | | L ↘ R | L ↘ R | L ↘ R | | |
| 1NO | N/D | 1 | O | X | BST-010 | Knob/Lever Key | ASD200 | ASD2100 | ASD2200 | |
| | | 2 | O | O | BST-D | Illuminated Knob | ASD2K00 | ASD21K00 | ASD22K00 | |
| 1NC | 116 | 1 | X | O | BST-001 | Knob/Lever Key | ASD200 | ASD2100 | ASD2200 | |
| | | 2 | O | O | BST-D | Illuminated Knob | ASD2K00 | ASD21K00 | ASD22K00 | |
| 1NO 1NC | N/D | 1 | O | X | BST-010 | Knob/Lever Key | ASD200 | ASD2100 | ASD2200 | |
| | | 2 | X | O | BST-001 | Illuminated Knob | ASD2K00 | ASD21K00 | ASD22K00 | |
| 1NO 1NC | 103 | 1 | X | O | BST-001 | Knob/Lever Key | ASD200 | ASD2100 | ASD2200 | |
| | | 2 | O | X | BST-010 | Illuminated Knob | ASD2K00 | ASD21K00 | ASD22K00 | |
| 1NO-EM 1NC-LB | 600 | 1 | O | X | BST-010S | Knob/Lever Key | ASD200 | ASD2100 | ASD2200 | |
| | | 2 | X | O | BST-001S | Illuminated Knob | ASD2K00 | ASD21K00 | ASD22K00 | |
| 1NO-EM 1NC-LB | 601 | 1 | X | O | BST-001S | Knob/Lever Key | ASD200 | ASD2100 | ASD2200 | |
| | | 2 | O | X | BST-010S | Illuminated Knob | ASD2K00 | ASD21K00 | ASD22K00 | |
| 2NO | N/D | 1 | O | X | BST-010 | Knob/Lever Key | ASD200 | ASD2100 | ASD2200 | |
| | | 2 | O | X | BST-010 | Illuminated Knob | ASD2K00 | ASD21K00 | ASD22K00 | |
| 2NC | 104 | 1 | X | O | BST-001 | Knob/Lever Key | ASD200 | ASD2100 | ASD2200 | |
| | | 2 | X | O | BST-001 | Illuminated Knob | ASD2K00 | ASD21K00 | ASD22K00 | |
| 2NO 2NC | N/D | 1 | O | X | BST-010 | Knob/Lever Key Illuminated Knob | ASD200 ASD2K00 ASLD200 | ASD2100 ASD21K00 ASLD2100 | ASD2200 ASD22K00 ASLD2200 | |
| | | 2 | X | O | BST-001 | | | | | |
| | | 3 | O | X | BST-010 | | | | | |
| | | 4 | X | O | BST-001 | | | | | |
| | 110 | 110 | 1 | X | O | BST-001 | Knob/Lever Key Illuminated Knob | ASD200 ASD2K00 ASLD200 | ASD2100 ASD21K00 ASLD2100 | ASD2200 ASD22K00 ASLD2200 |
| | | | 2 | O | X | BST-010 | | | | |
| | | | 3 | X | O | BST-001 | | | | |
| | | | 4 | O | X | BST-010 | | | | |
| | 111 | 111 | 1 | O | X | BST-010 | Knob/Lever Key Illuminated Knob | ASD200 ASD2K00 ASLD200 | ASD2100 ASD21K00 ASLD2100 | ASD2200 ASD22K00 ASLD2200 |
| | | | 2 | O | X | BST-010 | | | | |
| | | | 3 | X | O | BST-001 | | | | |
| | | | 4 | X | O | BST-001 | | | | |
| 4NO | N/D | 1 | O | X | BST-010 | Knob/Lever Key Illuminated Knob | ASD200 ASD2K00 ASLD200 | ASD2100 ASD21K00 ASLD2100 | ASD2200 ASD22K00 ASLD2200 | |
| | | 2 | O | X | BST-010 | | | | | |
| | | 3 | O | X | BST-010 | | | | | |
| | | 4 | O | X | BST-010 | | | | | |

A4

Switches & Pilot Devices

Contact Arrangement Chart: 3-Position Selector Switches

| Style | | Mounting Position | Operator Position | | | Contact Block Part Number | Description | Operator Part Number | | | | |
|--------------------------------|----------------|-------------------|-------------------|---|---------|---------------------------------|------------------------------------|---------------------------------------|---------------------------------------|---------------------------------------|---------------------------------------|---------------------------------------|
| Contact | Circuit Number | | L | C | R | | | Maintained | Spring Ret. from Rt. | Spring Ret. from Lt. | Two-Way | |
| | | | | | | | | | | | | |
| A4 Switches & Pilot Devices | 1NO 1NC | 202 | 1 | X | 0 | 0 | BST-010 | Knob/Lever Key Illuminated Knob | ASD300-1 ASD3K00-1 ASLD300-1 | ASD3100-1 ASD31K00-1 ASLD3100-1 | ASD3200-1 ASD32K00-1 ASLD3200-1 | ASD3300-1 ASD33K00-1 ASLD3300-1 |
| | | | 2 | X | X | 0 | BST-001 | | ASD300-1 ASD3K00-1 ASLD300-1 | ASD3100-1 ASD31K00-1 ASLD3100-1 | ASD3200-1 ASD32K00-1 ASLD3200-1 | ASD3300-1 ASD33K00-1 ASLD3300-1 |
| | | 203 | 1 | 0 | X | X | BST-001 | Knob/Lever Key Illuminated Knob | ASD300-1 ASD3K00-1 ASLD300-1 | ASD3100-1 ASD31K00-1 ASLD3100-1 | ASD3200-1 ASD32K00-1 ASLD3200-1 | ASD3300-1 ASD33K00-1 ASLD3300-1 |
| | | | 2 | 0 | 0 | X | BST-010 | | ASD300-2 ASD3K00-2 ASLD300-2 | ASD3100-2 ASD31K00-2 ASLD3100-2 | ASD3200-2 ASD32K00-2 ASLD3200-2 | ASD3300-2 ASD33K00-2 ASLD3300-2 |
| | | 302 | 1 | X | 0 | X | BST-010 | Knob/Lever Key Illuminated Knob | ASD300-2 ASD3K00-2 ASLD300-2 | ASD3100-2 ASD31K00-2 ASLD3100-2 | ASD3200-2 ASD32K00-2 ASLD3200-2 | ASD3300-2 ASD33K00-2 ASLD3300-2 |
| | | | 2 | X | X | 0 | BST-001 | | ASD300-2 ASD3K00-2 ASLD300-2 | ASD3100-2 ASD31K00-2 ASLD3100-2 | ASD3200-2 ASD32K00-2 ASLD3200-2 | ASD3300-2 ASD33K00-2 ASLD3300-2 |
| | 303 | 1 | 0 | X | 0 | BST-001 | Knob/Lever Key Illuminated Knob | ASD300-2 ASD3K00-2 ASLD300-2 | ASD3100-2 ASD31K00-2 ASLD3100-2 | ASD3200-2 ASD32K00-2 ASLD3200-2 | ASD3300-2 ASD33K00-2 ASLD3300-2 | |
| | | 2 | 0 | 0 | X | BST-010 | | ASD300-1 ASD3K00-1 ASLD300-1 | ASD3100-1 ASD31K00-1 ASLD3100-1 | ASD3200-1 ASD32K00-1 ASLD3200-1 | ASD3300-1 ASD33K00-1 ASLD3300-1 | |
| | 2NO | N/D | 1 | X | 0 | 0 | BST-010 | Knob/Lever Key Illuminated Knob | ASD300-1 ASD3K00-1 ASLD300-1 | ASD3100-1 ASD31K00-1 ASLD3100-1 | ASD3200-1 ASD32K00-1 ASLD3200-1 | ASD3300-1 ASD33K00-1 ASLD3300-1 |
| | | | 2 | 0 | 0 | X | BST-010 | | ASD300-2 ASD3K00-2 ASLD300-2 | ASD3100-2 ASD31K00-2 ASLD3100-2 | ASD3200-2 ASD32K00-2 ASLD3200-2 | ASD3300-2 ASD33K00-2 ASLD3300-2 |
| | 301 | 1 | X | 0 | X | BST-010 | Knob/Lever Key Illuminated Knob | ASD300-2 ASD3K00-2 ASLD300-2 | ASD3100-2 ASD31K00-2 ASLD3100-2 | ASD3200-2 ASD32K00-2 ASLD3200-2 | ASD3300-2 ASD33K00-2 ASLD3300-2 | |
| | | 2 | 0 | 0 | X | BST-010 | | ASD300-1 ASD3K00-1 ASLD300-1 | ASD3100-1 ASD31K00-1 ASLD3100-1 | ASD3200-1 ASD32K00-1 ASLD3200-1 | ASD3300-1 ASD33K00-1 ASLD3300-1 | |
| 2NC | 304 | 1 | 0 | X | 0 | BST-001 | Knob/Lever Key Illuminated Knob | ASD300-2 ASD3K00-2 ASLD300-2 | ASD3100-2 ASD31K00-2 ASLD3100-2 | ASD3200-2 ASD32K00-2 ASLD3200-2 | ASD3300-2 ASD33K00-2 ASLD3300-2 | |
| | | 2 | X | X | 0 | BST-001 | | ASD300-1 ASD3K00-1 ASLD300-1 | ASD3100-1 ASD31K00-1 ASLD3100-1 | ASD3200-1 ASD32K00-1 ASLD3200-1 | ASD3300-1 ASD33K00-1 ASLD3300-1 | |
| N/D | 1 | 0 | X | X | BST-001 | Knob/Lever Key Illuminated Knob | ASD300-1 ASD3K00-1 ASLD300-1 | ASD3100-1 ASD31K00-1 ASLD3100-1 | ASD3200-1 ASD32K00-1 ASLD3200-1 | ASD3300-1 ASD33K00-1 ASLD3300-1 | | |
| | 2 | X | X | 0 | BST-001 | | ASD300-1 ASD3K00-1 ASLD300-1 | ASD3100-1 ASD31K00-1 ASLD3100-1 | ASD3200-1 ASD32K00-1 ASLD3200-1 | ASD3300-1 ASD33K00-1 ASLD3300-1 | | |
| 2NO 2NC | N/D | 1 | X | 0 | 0 | BST-010 | Knob/Lever Key Illuminated Knob | ASD300-1 ASD3K00-1 ASLD300-1 | ASD3100-1 ASD31K00-1 ASLD3100-1 | ASD3200-1 ASD32K00-1 ASLD3200-1 | ASD3300-1 ASD33K00-1 ASLD3300-1 | |
| | | 2 | 0 | 0 | X | BST-010 | | ASD300-1 ASD3K00-1 ASLD300-1 | ASD3100-1 ASD31K00-1 ASLD3100-1 | ASD3200-1 ASD32K00-1 ASLD3200-1 | ASD3300-1 ASD33K00-1 ASLD3300-1 | |
| | | 3 | 0 | X | X | BST-001 | | ASD300-1 ASD3K00-1 ASLD300-1 | ASD3100-1 ASD31K00-1 ASLD3100-1 | ASD3200-1 ASD32K00-1 ASLD3200-1 | ASD3300-1 ASD33K00-1 ASLD3300-1 | |
| | | 4 | X | X | 0 | BST-001 | | ASD300-1 ASD3K00-1 ASLD300-1 | ASD3100-1 ASD31K00-1 ASLD3100-1 | ASD3200-1 ASD32K00-1 ASLD3200-1 | ASD3300-1 ASD33K00-1 ASLD3300-1 | |
| | 210 | 1 | 0 | X | X | BST-001 | Knob/Lever Key Illuminated Knob | ASD300-1 ASD3K00-1 ASLD300-1 | ASD3100-1 ASD31K00-1 ASLD3100-1 | ASD3200-1 ASD32K00-1 ASLD3200-1 | ASD3300-1 ASD33K00-1 ASLD3300-1 | |
| | | 2 | 0 | 0 | X | BST-010 | | ASD300-1 ASD3K00-1 ASLD300-1 | ASD3100-1 ASD31K00-1 ASLD3100-1 | ASD3200-1 ASD32K00-1 ASLD3200-1 | ASD3300-1 ASD33K00-1 ASLD3300-1 | |
| | | 3 | 0 | X | X | BST-001 | | ASD300-2 ASD3K00-2 ASLD300-2 | ASD3100-2 ASD31K00-2 ASLD3100-2 | ASD3200-2 ASD32K00-2 ASLD3200-2 | ASD3300-2 ASD33K00-2 ASLD3300-2 | |
| | | 4 | 0 | 0 | X | BST-010 | | ASD300-2 ASD3K00-2 ASLD300-2 | ASD3100-2 ASD31K00-2 ASLD3100-2 | ASD3200-2 ASD32K00-2 ASLD3200-2 | ASD3300-2 ASD33K00-2 ASLD3300-2 | |
| | 308 | 1 | X | 0 | X | BST-010 | Knob/Lever Key Illuminated Knob | ASD300-2 ASD3K00-2 ASLD300-2 | ASD3100-2 ASD31K00-2 ASLD3100-2 | ASD3200-2 ASD32K00-2 ASLD3200-2 | ASD3300-2 ASD33K00-2 ASLD3300-2 | |
| | | 2 | X | X | 0 | BST-001 | | ASD300-2 ASD3K00-2 ASLD300-2 | ASD3100-2 ASD31K00-2 ASLD3100-2 | ASD3200-2 ASD32K00-2 ASLD3200-2 | ASD3300-2 ASD33K00-2 ASLD3300-2 | |
| | | 3 | X | 0 | X | BST-010 | | ASD300-2 ASD3K00-2 ASLD300-2 | ASD3100-2 ASD31K00-2 ASLD3100-2 | ASD3200-2 ASD32K00-2 ASLD3200-2 | ASD3300-2 ASD33K00-2 ASLD3300-2 | |
| | | 4 | X | X | 0 | BST-001 | | ASD300-2 ASD3K00-2 ASLD300-2 | ASD3100-2 ASD31K00-2 ASLD3100-2 | ASD3200-2 ASD32K00-2 ASLD3200-2 | ASD3300-2 ASD33K00-2 ASLD3300-2 | |
| 309 | 1 | X | 0 | X | BST-010 | Knob/Lever Key Illuminated Knob | ASD300-2 ASD3K00-2 ASLD300-2 | ASD3100-2 ASD31K00-2 ASLD3100-2 | ASD3200-2 ASD32K00-2 ASLD3200-2 | ASD3300-2 ASD33K00-2 ASLD3300-2 | | |
| | 2 | X | X | 0 | BST-001 | | ASD300-2 ASD3K00-2 ASLD300-2 | ASD3100-2 ASD31K00-2 ASLD3100-2 | ASD3200-2 ASD32K00-2 ASLD3200-2 | ASD3300-2 ASD33K00-2 ASLD3300-2 | | |
| | 3 | 0 | X | 0 | BST-001 | | ASD300-2 ASD3K00-2 ASLD300-2 | ASD3100-2 ASD31K00-2 ASLD3100-2 | ASD3200-2 ASD32K00-2 ASLD3200-2 | ASD3300-2 ASD33K00-2 ASLD3300-2 | | |
| | 4 | 0 | 0 | X | BST-010 | | ASD300-2 ASD3K00-2 ASLD300-2 | ASD3100-2 ASD31K00-2 ASLD3100-2 | ASD3200-2 ASD32K00-2 ASLD3200-2 | ASD3300-2 ASD33K00-2 ASLD3300-2 | | |
| 310 | 1 | 0 | X | 0 | BST-001 | Knob/Lever Key Illuminated Knob | ASD300-2 ASD3K00-2 ASLD300-2 | ASD3100-2 ASD31K00-2 ASLD3100-2 | ASD3200-2 ASD32K00-2 ASLD3200-2 | ASD3300-2 ASD33K00-2 ASLD3300-2 | | |
| | 2 | 0 | 0 | X | BST-010 | | ASD300-2 ASD3K00-2 ASLD300-2 | ASD3100-2 ASD31K00-2 ASLD3100-2 | ASD3200-2 ASD32K00-2 ASLD3200-2 | ASD3300-2 ASD33K00-2 ASLD3300-2 | | |
| | 3 | 0 | X | 0 | BST-001 | | ASD300-2 ASD3K00-2 ASLD300-2 | ASD3100-2 ASD31K00-2 ASLD3100-2 | ASD3200-2 ASD32K00-2 ASLD3200-2 | ASD3300-2 ASD33K00-2 ASLD3300-2 | | |
| | 4 | 0 | 0 | X | BST-010 | | ASD300-2 ASD3K00-2 ASLD300-2 | ASD3100-2 ASD31K00-2 ASLD3100-2 | ASD3200-2 ASD32K00-2 ASLD3200-2 | ASD3300-2 ASD33K00-2 ASLD3300-2 | | |
| 4NO | N/D | 1 | X | 0 | 0 | BST-010 | Knob/Lever Key Illuminated Knob | ASD300-1 ASD3K00-1 ASLD300-1 | ASD3100-1 ASD31K00-1 ASLD3100-1 | ASD3200-1 ASD32K00-1 ASLD3200-1 | ASD3300-1 ASD33K00-1 ASLD3300-1 | |
| | | 2 | 0 | 0 | X | BST-010 | | ASD300-1 ASD3K00-1 ASLD300-1 | ASD3100-1 ASD31K00-1 ASLD3100-1 | ASD3200-1 ASD32K00-1 ASLD3200-1 | ASD3300-1 ASD33K00-1 ASLD3300-1 | |
| | | 3 | X | 0 | 0 | BST-010 | | ASD300-2 ASD3K00-2 ASLD300-2 | ASD3100-2 ASD31K00-2 ASLD3100-2 | ASD3200-2 ASD32K00-2 ASLD3200-2 | ASD3300-2 ASD33K00-2 ASLD3300-2 | |
| | | 4 | 0 | 0 | X | BST-010 | | ASD300-2 ASD3K00-2 ASLD300-2 | ASD3100-2 ASD31K00-2 ASLD3100-2 | ASD3200-2 ASD32K00-2 ASLD3200-2 | ASD3300-2 ASD33K00-2 ASLD3300-2 | |
| 305 | 1 | X | 0 | X | BST-010 | Knob/Lever Key Illuminated Knob | ASD300-2 ASD3K00-2 ASLD300-2 | ASD3100-2 ASD31K00-2 ASLD3100-2 | ASD3200-2 ASD32K00-2 ASLD3200-2 | ASD3300-2 ASD33K00-2 ASLD3300-2 | | |
| | 2 | 0 | 0 | X | BST-010 | | ASD300-2 ASD3K00-2 ASLD300-2 | ASD3100-2 ASD31K00-2 ASLD3100-2 | ASD3200-2 ASD32K00-2 ASLD3200-2 | ASD3300-2 ASD33K00-2 ASLD3300-2 | | |
| | 3 | X | 0 | X | BST-010 | | ASD300-2 ASD3K00-2 ASLD300-2 | ASD3100-2 ASD31K00-2 ASLD3100-2 | ASD3200-2 ASD32K00-2 ASLD3200-2 | ASD3300-2 ASD33K00-2 ASLD3300-2 | | |
| | 4 | 0 | 0 | X | BST-010 | | ASD300-2 ASD3K00-2 ASLD300-2 | ASD3100-2 ASD31K00-2 ASLD3100-2 | ASD3200-2 ASD32K00-2 ASLD3200-2 | ASD3300-2 ASD33K00-2 ASLD3300-2 | | |
| 4NC | N/D | 1 | 0 | X | X | BST-001 | Knob/Lever Key Illuminated Knob | ASD300-1 ASD3K00-1 ASLD300-1 | ASD3100-1 ASD31K00-1 ASLD3100-1 | ASD3200-1 ASD32K00-1 ASLD3200-1 | ASD3300-1 ASD33K00-1 ASLD3300-1 | |
| | | 2 | X | X | 0 | BST-001 | | ASD300-1 ASD3K00-1 ASLD300-1 | ASD3100-1 ASD31K00-1 ASLD3100-1 | ASD3200-1 ASD32K00-1 ASLD3200-1 | ASD3300-1 ASD33K00-1 ASLD3300-1 | |
| | | 3 | 0 | X | X | BST-001 | | ASD300-1 ASD3K00-1 ASLD300-1 | ASD3100-1 ASD31K00-1 ASLD3100-1 | ASD3200-1 ASD32K00-1 ASLD3200-1 | ASD3300-1 ASD33K00-1 ASLD3300-1 | |
| | | 4 | X | X | 0 | BST-001 | | ASD300-1 ASD3K00-1 ASLD300-1 | ASD3100-1 ASD31K00-1 ASLD3100-1 | ASD3200-1 ASD32K00-1 ASLD3200-1 | ASD3300-1 ASD33K00-1 ASLD3300-1 | |
| 314 | 1 | 0 | X | 0 | BST-001 | Knob/Lever Key Illuminated Knob | ASD300-2 ASD3K00-2 ASLD300-2 | ASD3100-2 ASD31K00-2 ASLD3100-2 | ASD3200-2 ASD32K00-2 ASLD3200-2 | ASD3300-2 ASD33K00-2 ASLD3300-2 | | |
| | 2 | X | X | 0 | BST-001 | | ASD300-2 ASD3K00-2 ASLD300-2 | ASD3100-2 ASD31K00-2 ASLD3100-2 | ASD3200-2 ASD32K00-2 ASLD3200-2 | ASD3300-2 ASD33K00-2 ASLD3300-2 | | |
| | 3 | 0 | X | 0 | BST-001 | | ASD300-2 ASD3K00-2 ASLD300-2 | ASD3100-2 ASD31K00-2 ASLD3100-2 | ASD3200-2 ASD32K00-2 ASLD3200-2 | ASD3300-2 ASD33K00-2 ASLD3300-2 | | |
| | 4 | X | X | 0 | BST-001 | | ASD300-2 ASD3K00-2 ASLD300-2 | ASD3100-2 ASD31K00-2 ASLD3100-2 | ASD3200-2 ASD32K00-2 ASLD3200-2 | ASD3300-2 ASD33K00-2 ASLD3300-2 | | |

- Each operator sub-assembly is available as a "-1" and a "-2" for 3-position selector switches. The internal cam of a "-1" is different from that of a "-2". This results in designated combinations of open and closed contacts in the various operator positions.
- N/D = No circuit number designation required in assembled part number.
- X = On (closed contacts) O = Off (open contacts). X-X Overlapping contacts remain on (closed) when switch is moved between these two positions.

Operator Truth Tables

Use the following tables to build custom selector switches.

2 Position Selector Switches

| | Contact | Mounting Position | Operator Position | |
|---------------|------------------|-------------------|-------------------|--------------|
| | | | Left | Right |
| ASD200 | BST-010 (NO) | L | 0 | X |
| | | R | 0 | X |
| | BST-001 (NC) | L | X | 0 |
| | | R | X | 0 |
| | BST-010S (NO-EM) | L | 0 | X |
| | | R | 0 | X |
| | BST-001S (NC-LB) | L | X | 0 |
| | | R | X | 0 |

3 Position Selector Switches

| | Contact | Mounting Position | Operator Position | | |
|---|------------------|-------------------|-------------------|--------------|--------------|
| | | | Left | Center | Right |
| ASD300-1 ASLD300-1 ASD3K00-1 | BST-010 (NO) | L | X | 0 | 0 |
| | | R | 0 | 0 | X |
| | BST-001 (NC) | L | 0 | X | X |
| | | R | X | X | 0 |
| | BST-010S (NO-EM) | L | X | 0 | 0 |
| | | R | 0 | 0 | X |
| | BST-001S (NC-LB) | L | 0 | X | X |
| | | R | X | X | 0 |

| | Contact | Mounting Position | Operator Position | | |
|---|------------------|-------------------|-------------------|--------------|--------------|
| | | | Left | Center | Right |
| ASD300-2 ASLD300-2 ASD3K00-2 | BST-010 (NO) | L | X | 0 | X |
| | | R | 0 | 0 | X |
| | BST-001 (NC) | L | 0 | X | 0 |
| | | R | X | X | 0 |
| | BST-010S (NO-EM) | L | X | 0 | X |
| | | R | 0 | 0 | X |
| | BST-001S (NC-LB) | L | 0 | X | 0 |
| | | R | X | X | 0 |













1. For Operator Truth Tables, see next page.
2. For examples of how to assemble selector switches, see A3-82.

3 Position Push/Pull Switches





| | Contact | Operator Position | | |
|---------------|------------------|-------------------|--------|------|
| | | Pull | Normal | Push |
| AYLD22 | BST-010 (NO) | 0 | 0 | X |
| | BST-001 (NC) | X | 0 | 0 |
| | BST-010S (NO-EM) | 0 | X | X |
| | BST-001S (NC-LB) | X | X | 0 |

Accessories — TWTD Series

| | | | |
|----------------------|---|--|--|
| Lamp Removal Tool |  | Tool used to install LED's and incandescent lamps. | OR-55 |
| Metal Bezel |  | Replacement locking ring/bezel | Standard octagonal units (chrome-pl.). OG-81 |
| | | | Extended, non-illuminated (chrome-pl.). OG-82 |
| | | | Extended, illuminated (chrome-pl.). OG-83L |
| | | | Jumbo Mushroom Shallow Shroud ABN4G |
| | | | Jumbo Mushroom Deep Shroud ABN4F |
| Plastic Bezel |  | Black plastic locking ring/bezel | OGP11B |
| Boot/Cover |  | Used to cover and protect push-buttons. | In place of ①, specify neoprene Rubber Boot color: B (black), G (green), R (red), Y (yellow) OC-11 ① |
| | | | Flush units (clear plastic -40° to +60°C). OC-121 |
| | | | Extended units (clear plastic -40° to +60°C). OC-122 |
| Anti-Rotation Ring |  | Plastic washer For nameplates or panels that should not be scratched. | OGL-D1T |
| | | Thrust washer/Anti-rotation ring for use with notched panel cutout. | OGL-D1S |
| Mounting Hole Plug |  | Plugs used to fill unused 30mm panel cutouts. | Plastic with locking nut attached. OBP-11 |
| | | | Metal with locking nut attached OB-11 |
| | | | Grey rubber (-5° to +60°C) OB-13 |
| Terminal Tab Adaptor |  | Tab #250 17/64" x 3/64" (6.35mm x 0.8mm): Single tab | TW-FA1 |
| Full Voltage Adaptor |  | Used on all full voltage illuminated units. Two required per unit. (M3.5 screw and saddle) | APD-F |
| Lock Out Adaptor |  | Used to provide lockout protection for TWTD pushbuttons and knob selectors. Ø 1-13/64" (30mm) | OL-KL1 |
| Replacement Keys |  | Pair of Keys (#0) | TW-SK |

Accessories con't

Part Numbers: Fingersafe Covers for TWTD Series

| Appearance | Description | Used with | Part Number |
|--|---|--|-------------|
|  | Fingersafe terminal cover, for full voltage pilot lights, adds 3mm to overall depth | APD199... full voltage pilot lights | APD-PVL |
|  | Fingersafe terminal cover, for contact blocks, adds 3mm to overall depth | Non-Illuminated pushbuttons ABD..., and AOD... | N-VL2 |
|  | Fingersafe terminal cover, adds 1.5mm to overall depth | Transformer pilot lights and illuminated units | N-VL3 |
|  | Fingersafe terminal cover, adds 4 mm to depth | Full voltage illuminated pushbuttons | N-VL4 |

A4

Switches & Pilot Devices



Dimensions on page A4-192.

Nameplates — TWTD Series

Part Numbers: Nameplates

| | | NALD | NAKD | NAQD | HNAV |
|-----------------------------|-------|-------------|-------------|-------------|--------------------------|
| Dimensions | | | | | |
| Description | | Part Number | Part Number | Part Number | Part Number |
| Nameplate (blank) | Black | NALD-B | NAKD-B | NAQD-B | HNAV-0 |
| | Red | NALD-R | NAKD-R | NAQD-R | |
| Nameplate (engraved) | | NALD-① | NAKD-① | NAQD-① | HNAV-27 "Emergency Stop" |

1. Nameplates are made of 0.031" aluminum. Lettering is white letters engraved on black background.
2. In place of ①, insert either the standard legend code from table below or custom engraving delimited by " ".
3. HNAV available in yellow only.

* Standard Legend Codes

| Pushbuttons | | | | Pushbuttons/Selector Switches | | | | Selector Switches | |
|-------------|------|---------------|------|-------------------------------|------|------------|------|-------------------|------|
| Legend | Code | Legend | Code | Legend | Code | Legend | Code | Legend | Code |
| AUTO | 101 | OPEN | 116 | AUTO-MAN | 201 | | | AUTO-MAN-OFF | 301 |
| CLOSE | 102 | OUT | 117 | CLOSE-OPEN | 202 | | | AUTO-OFF-MAN | 302 |
| DOWN | 103 | RAISE | 118 | DOWN-UP | 203 | | | CLOSE-OFF-OPEN | 303 |
| *EMERG.STOP | 104 | RESET | 119 | FAST-SLOW | 204 | | | DOWN-OFF-SLOW | 304 |
| FAST | 105 | REVERSE | 120 | FOR-REV | 205 | REV-FOR | 216 | FAST-OFF-SLOW | 305 |
| FORWARD | 106 | RUN | 121 | HAND-AUTO | 206 | RUN-JOG | 217 | FOR-OFF-REV | 306 |
| HAND | 107 | SLOW | 122 | HIGH-LOW | 207 | RUN-SAFE | 218 | LEFT-OFF-RIGHT | 307 |
| HIGH | 108 | START | 123 | JOG-RUN | 208 | SAFE-RUN | 219 | LOWER-OFF-RAISE | 308 |
| IN | 109 | *STOP | 124 | LEFT-RIGHT | 209 | SLOW-FAST | 220 | OFF-MAN-AUTO | 309 |
| INCH | 110 | STOP | 125 | LOWER-RAISE | 210 | START-STOP | 221 | OFF-SLOW-FAST | 310 |
| JOG | 111 | TEST | 126 | MAN-AUTO | 211 | STOP-START | 222 | OFF-1-2 | 311 |
| LOW | 112 | UP | 127 | OFF-ON | 212 | UP-DOWN | 223 | OPEN-OFF-CLOSE | 312 |
| LOWER | 113 | I (Int'l On) | 150 | ON-OFF | 213 | | | SLOW-OFF-FAST | 313 |
| OFF | 114 | O (Int'l Off) | 151 | OPEN-CLOSE | 214 | | | SUMMER-OFF-WINTER | 314 |
| ON | 115 | EMO | 152 | RAISE-LOWER | 215 | | | UP-OFF-DOWN | 315 |
| | | | | | | | | 1-OFF-2 | 316 |
| | | | | | | | | HAND-OFF-AUTO | 317 |

1. *Available in Red as standard legend code 104 and 124. To order engraved nameplate and codes, add legend code to nameplate part number. Character height based on the number of characters, space and size of nameplate. Standard character size is 3/16".
2. Nameplates with standard legends are the same list price as blank nameplates. Special engravings, additional cost.

To specify engraving instructions, use the Nameplate order form on next page.


Nameplates Order Form — TWTD Series

Copy this order form and use it to specify Letter Height, Custom Engravings, Location of Engraving on Nameplate, and Quantity Desired. To insure engraving accuracy, fax it to your IDEC representative or Distributor.

| | |
|---------------------|---|
| Your Company: _____ | IDEC Rep/Distributor Contact: _____ |
| Name: _____ | PO number (if known): _____ |
| Telephone: _____ | IDEC Rep/Distributor Phone: _____ |
| Fax & Email: _____ | IDEC Rep/Distributor Fax & Email: _____ |

A4

NALD Nameplate



Step 1. Choose Letter Size - 7/64" or 1/8".
Check the box for the letter size you want. Then write your lettering in box below checkboxes. Note: 1/8" size letters cannot exceed 13 characters.

Sample Letter Sizes

7/64" Letters:

A B C D

1/8" Letters:

A B C D

7/64"
Letter
Size

16 characters max
(for 7/64" size letters)

1/8"
Letter
Size

13 characters max
(for 1/8" size letters)


Step 2. Specify Quantity.
Enter the number of nameplates desired in the box on the right.

Qty

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16

Switches & Pilot Devices

NAKD Nameplate

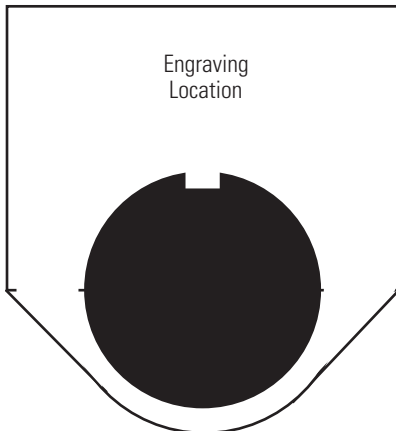

Step 1. 1/8" Letter Size Only Specify Lettering
Write your lettering in box to the right. Maximum 17 characters per line, maximum 4 lines.


1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17

Step 2. Specify Quantity.
Enter the number of nameplates desired in the box on the right.

Qty

Sample Letter Size
1/8" Letters: A B C D

NAQD Nameplate

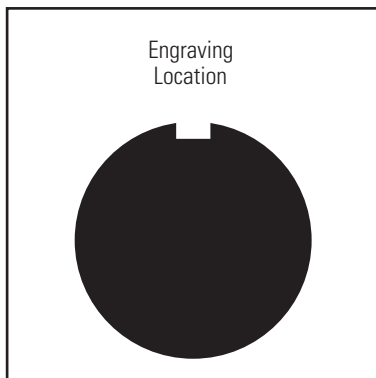

Step 1. Choose Letter Size - 7/64" or 1/8".
Check the box for the letter size you want. Then write your lettering in box below checkboxes. Note: 1/8" size letters cannot exceed 16 characters.

7/64"
Letter
Size

20 characters max
(for 7/64" size letters)

1/8"
Letter
Size

16 characters max
(for 1/8" size letters)

Step 2. Specify Quantity.
Enter the number of nameplates desired in the box on the right.

Qty

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20


Sample Letter Sizes
7/64" Letters: A B C D
1/8" Letters: A B C D

A4


Switches & Pilot Devices

Dimensions — TWTD Series

Pushbutton

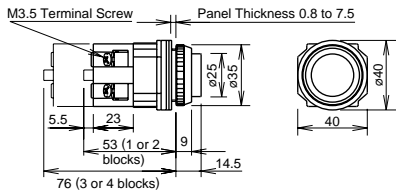

Mushroom Pushbutton w/Full Shroud

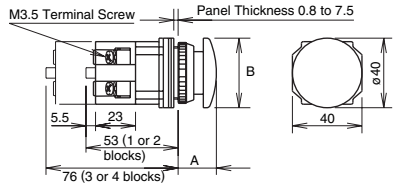


| Pushbuttons | Dimension A | Dimension B |
|--|-----------------------------------|----------------------------------|
| Flush | 0.351" (9mm) | Ø 0.975" (25mm) |
| Extended | 0.566" (14.5mm) | Ø 0.975" (25mm) |
| Extended w/Full Shroud | 0.663" (17mm) | Ø 1.11" (28.5mm) |
| Mushroom | 0.858" (22mm) | Ø 1.56" (40mm) |
| Mushroom w/Full Shroud | 0.936" (24mm) | Ø 1.87" (48mm) |
| Jumbo Mushroom | 1.13" (29mm) | Ø 2.54" (65mm) |
| Mushroom, Pushlock Turn Reset and Push-Pull | *0.975" (25mm) **0.975" (25mm) | Ø 1.56" (40mm) Ø 1.56" (40mm) |


Note: *Dimension when operator is in reset position.
**Dimension when operator is in pull position.

Illuminated Pushbuttons

w/AC Adapter w/Transformer

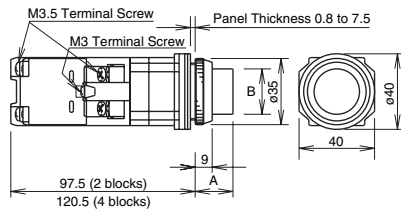


Full Voltage

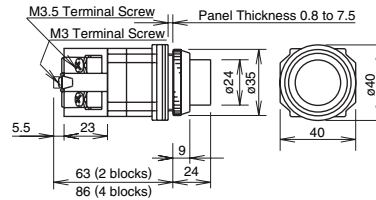


| Illuminated Pushbuttons | Dimension A | Dimension B |
|---|-----------------------------------|------------------------------------|
| Flush w/Full Shroud | 0.975" (25mm) 0.995" (25.5mm) | Ø 0.936" (24mm) Ø 0.936" (24mm) |
| Extended w/Full Shroud | 0.741" (19mm) 0.761" (19.5mm) | Ø 0.936" (24mm) Ø 0.936" (24mm) |
| Ø 1.56" (40mm) Mushroom Pushlock Turn Reset, Push-Pull | *0.975" (25mm) **0.975" (25mm) | Ø 1.56" (40mm) Ø 1.56" (40mm) |

Note: *Dimension when operator is in reset position.
**Dimension when operator is in pull position.


Pilot Lights

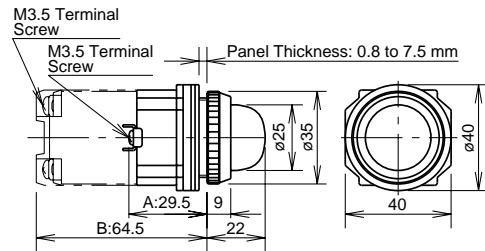


Selector Switches Knob

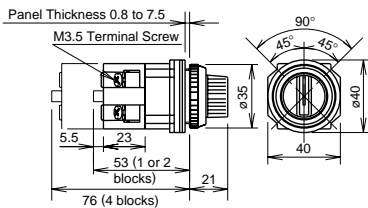


Lever

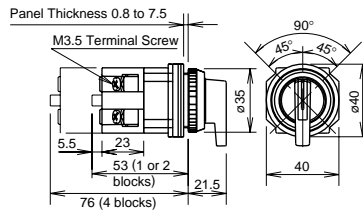

Key

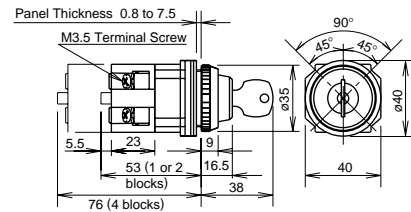


Illuminated Knob

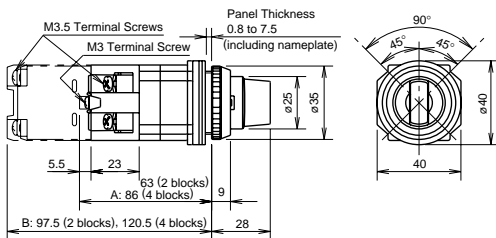

All measurements in mm.

Dimensions — TWTD Series con't


Selector Switches Panel Cut-Out

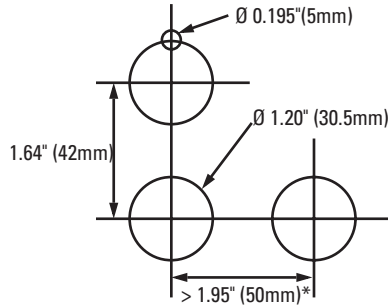


1. *Jumbo Mushroom < 2.61" (66mm)
2. Minimum mounting centers are applicable to switches with one stack of contact blocks. When mounting two stacks of contact blocks, minimum centers should allow for access to wiring.
3. The Ø 0.195" (Ø 5mm) recess is necessary when either the nameplate or anti-rotation ring is used.

Accessory Dimensions


OL-KL1 Lock-Out Adaptor

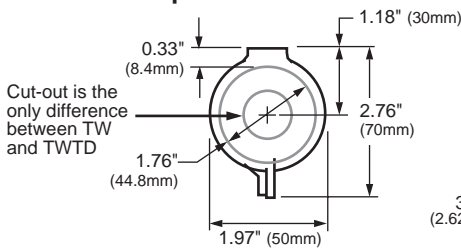


Cut-out is the only difference between TW and TWTD




OC-31 Pushbutton Clear Boot



OGL-31 Anti-Rotation Ring




OB-31 Mounting Hole Rubber Plug




Finger-Safe Cover


N-VL2

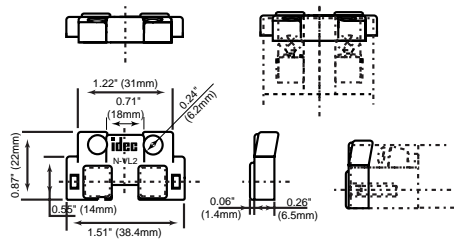


N-VL3

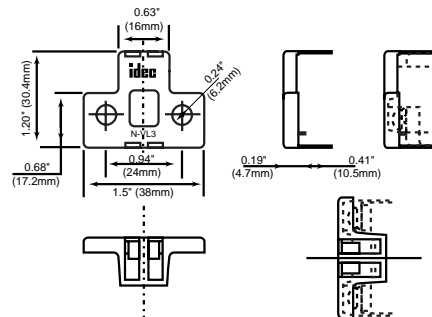

N-VL4

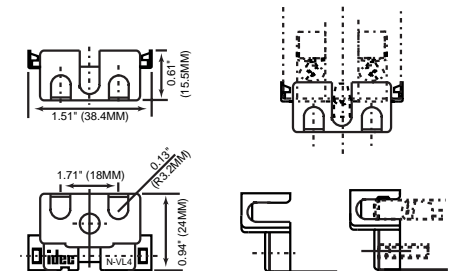

APD-PVL

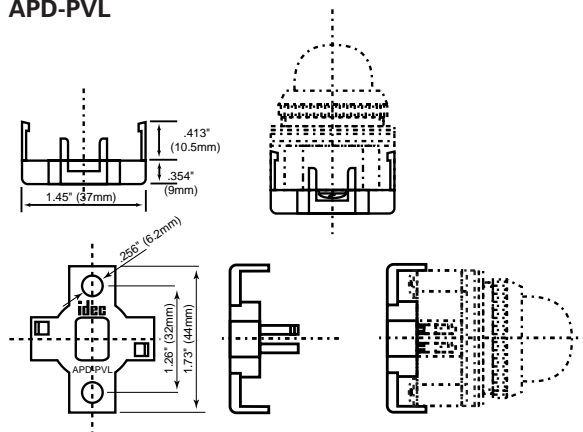

Instructions — TWTD Series


A4

Switches & Pilot Devices

Adjustment for Panel Thickness

Each unit is shipped with several waterproof gaskets which are 0.06" (1.5mm) and 0.12" (3mm) thick. Combine the gaskets for a dimension approximately equal to panel thickness and install between the bezel and the body of the unit.

A trim washer must be used with a thrust washer or a nameplate to prevent the control unit from rotating in the mounting hole. When using anti-rotation rings (trim washer with thrust washer or nameplate), install as shown below.

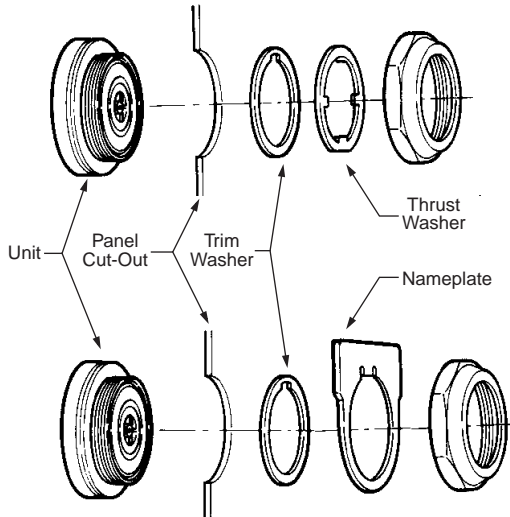

Selector Switches

The operator shaft of each unit has a recess to identify in which direction to install the handle. Align the handle with the recess. Press color insert (TW-HC1) into the Standard Operating Positions.

Standard operation positions

2-Position, 90°



3-Position, 45°




Non-Illuminated 3-Position Operators




Installation of TWTD Series Units

TWTD Pilot Lights



TWTD Illuminated Pushbuttons, TWTD Selector Switches (Transformer or Full Voltage)

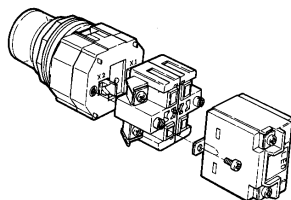

Terminal X1 = Positive
Terminal X2 = Negative

Installation of LED Illuminated Units—Transformer units are recommended for use in areas subjected to inductive noise. When using full voltage types, install a protection diode as shown below. Use diode with AC power supply to protect against reverse polarity. Use with DC power supply to protect against surges and noise.




Make sure that LED illuminated units are installed with correct polarity, as indicated at the terminals.

Application Example For Push-To-Test Pilot Light

A typical application of illuminated pushbuttons is a push-to-test pilot light which can be used to check the lamp/LED circuit.

Transformer/AC-Adapter Circuit

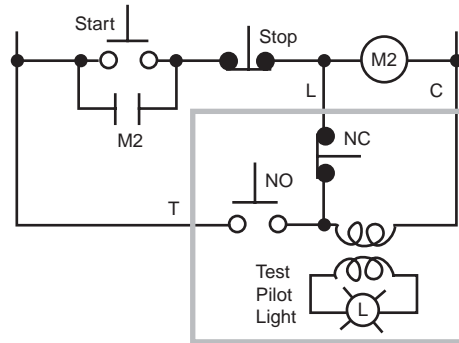

Full Voltage Circuit

