

## CONNECTORS FOR NONMETALLIC SHEATHED CABLES AND FLEXIBLE CORDS

Catalog Numbers: 3300, 3201-TB, 3202, 3300-100CP & 3201-100CP

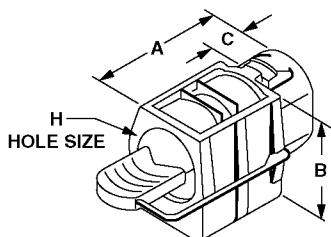


FIGURE 1

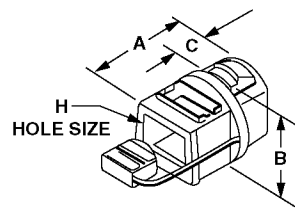
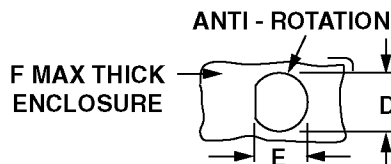


FIGURE 2

Cat. No.	For Use in K.O.	Fig.	A	B	C	D ±.010	E +.015 -.000	F	H
3300	1/2"	2	1-1/32"	15/16"	3/8"	880	795	0.080	5/16" x 9/16"
3201-TB	1/2"	1	1-11/32"	1"	7/16"	880	795	0.080	21/32" Dia.
3202	1/2"	1	1-1/2"	1-5/16"	7/16"	1.100	1.005	0.090	7/8 Dia.
3300-100CP	1/2"	2	1-1/32"	15/16"	3/8"	880	795	0.080	5/16" x 9/16"
3201-100CP	1/2"	1	1-11/32"	1"	7/16"	880	795	0.080	21/32" Dia.

**NOTE:** If rotation in hole is to be avoided, use connector in a hole with dimensions per column D and E.



### MATERIAL:

- U.L. Listed thermoplastic maximum service temperature 105°C.
- U.L. listed for use with NM and NMC cables (one or two), and for use with flexible cords (single and multiple). U.L. File No. E-23017.

### Catalog Number: 3300 and 3300-100CP

- For use with 10-2, 12-2 and 14-2 NM cables.
- For use with 18-2 and 18-3 SJ and SJO cords and 18-2 SV, SVO, SJT and SJTC cords, single or multiple.
- Cord capacity 125-300 diameter.

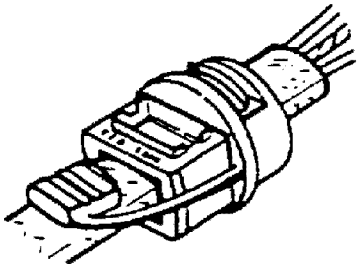
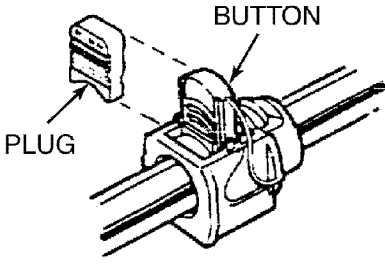
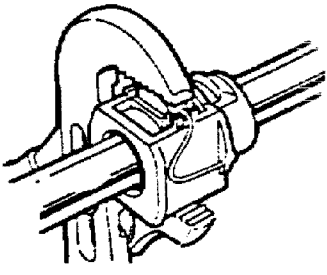
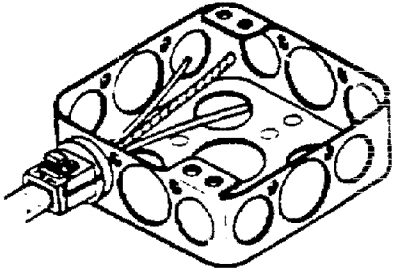
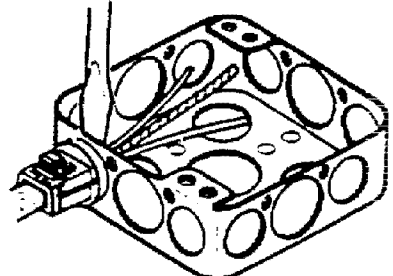
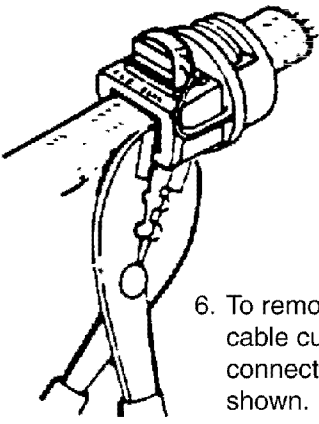
### Catalog Number: 3201 and 3201-100CP

- For use with 10-3, 12-3, 14-3, 10-2, 12-2, 14-2 NM cables.
- For use with multiple (2) 12-2 and 14-2 NM cables.
- For use with single and multiple flexible cords in wire range .300 in. to .600 in.

### Catalog Number: 3202

- For use with 8-3 and 6-3 NM cables.
- For use with (2) 14-3, 14-2, 12-2 and 10-2 NM cables.
- For use with single and multiple flexible cords in wire range .500 in. to .850 in.

# INSTALLING INSTRUCTIONS

 <p>1. Remove sheath from end of cable. (4" or more as required) Insert cable through connector as shown. (Cable under button)</p>	 <p>2. Insert button/plug into cavity.</p>	 <p>3. With grooved pliers, or parallel jaw type pliers (commercially available) squeeze button into cord or wires as far into connector body as possible. <b>NOTE:</b> It may be necessary to re-adjust pliers to insure button is properly installed.</p>
 <p>4. Snap connector into knockout box. If desired this step can be done prior to Step 1.</p>	 <p>5. To remove from knockout box depress ears.</p>	 <p>6. To remove from cable cut connector as shown.</p>

**WARRANTY:** Thomas & Betts sells this product with the understanding that the user will perform all necessary tests to determine the suitability of this product for the user's intended application. Thomas & Betts warrants that this product will be free from defects in materials and workmanship for a period of two (2) years following the date of purchase. Upon prompt notification of any warranted defect, Thomas & Betts will, at its option, repair or replace the defective product or refund the purchase price. Proof of purchase is required. Misuse or unauthorized modification of the product voids all warranties.

**Limitations and Exclusions:** THE ABOVE WARRANTY IS THE SOLE WARRANTY CONCERNING THIS PRODUCT, AND IS IN LIEU OF ALL OTHER WARRANTIES EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, WHICH ARE SPECIFICALLY DISCLAIMED. LIABILITY FOR BREACH OF THE ABOVE WARRANTY IS LIMITED TO COST OF REPAIR OR REPLACEMENT OF THE PRODUCT, AND UNDER NO CIRCUMSTANCES WILL THOMAS & BETTS BE LIABLE FOR ANY INDIRECT, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES.

Thomas & Betts Corporation  
Memphis, Tennessee  
[www.tnb.com](http://www.tnb.com)