REV.	DATE	DESCRIPTION
A	10/08/03	MODIFY PART DIMENSIONS / UPDATE DRAWING FORMAT
B	01/24/06	ADD FLAT ON BODY THREAD AREA

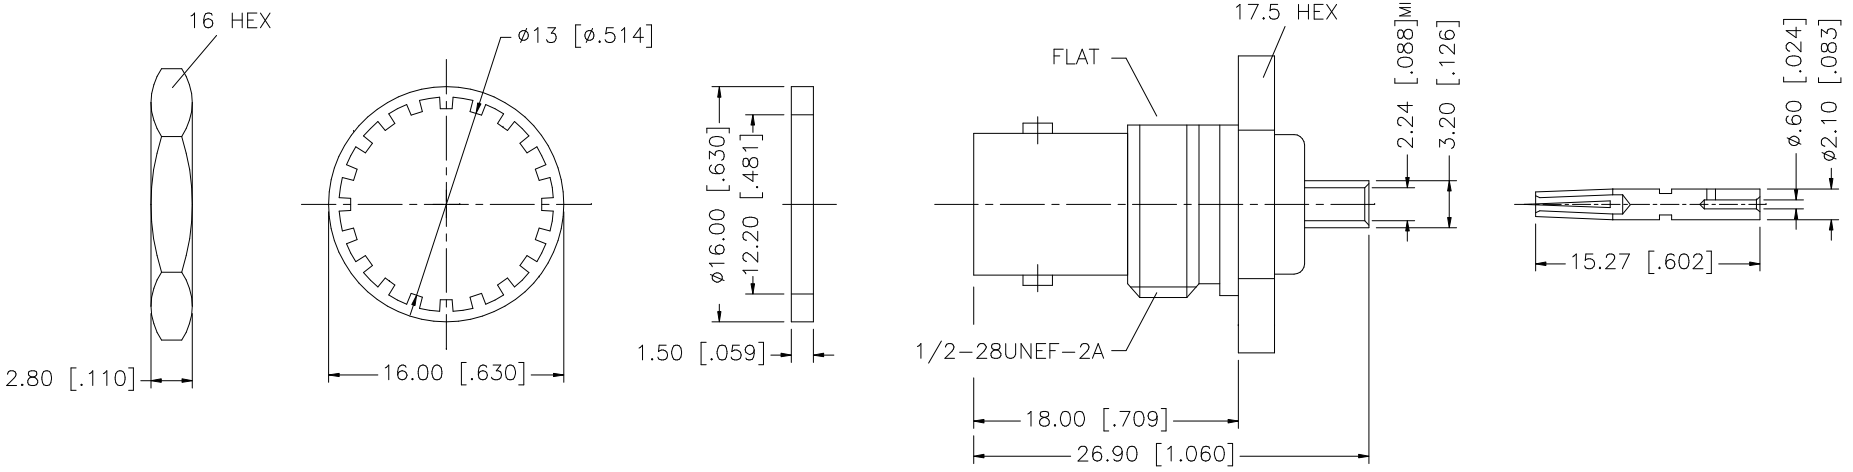



RECOMMENDED
MOUNTING HOLE





RECOMMENDED
CABLE STRIPPING DIM'S

8				
7	INSULATOR	TEFLON	NATURAL	1
6	HEX NUT	BRASS	NICKEL	1
5	LOCK WASHER	BRASS	NICKEL	1
4	GASKET	RUBBER	RED	1
3	CONTACT PIN	PHOS. BRONZE	GOLD	1
2	INSULATOR	TEFLON	NATURAL	1
1	BODY	BRASS	NICKEL	1
	DESCRIPTION	MATERIAL	FINISH	QTY

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERANCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 – 8mm ± 0.20mm
8 – 30mm ± 0.40mm
30 – 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 – .315 = ± 0.007"
.315 – 1.180 = ± 0.015"
1.180 – 4.724 = ± 0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN G.R.S.	01/24/06
CHECKED	
ISSUED	
SHEET 1 OF 1	

CAD FILE C:/112/112580.DWG

Amphenol Connex

PART DESCRIPTION
BNC BULKHEAD DIRECT SOLDER JACK
(FOR .085", .086" CABLE)

PART NO. 112580

DWG. NO.	REV.	SIZE	SCALE
112580.DWG	B	A	NA