


High Frequency Wire Wound Transformers

EF12.6 Platforms - SMT



- Power Range:** Up to 13W
- Height:** 10.2mm Max
- Footprint:** 19.9mm x 14.2mm Max
- Topology:** Forward and Flyback

| Electrical Specifications @ 25°C - Operating Temperature -40°C to +130°C | | | | | |
|--|-----------------|-------------------------------------|--------------|------------------------------|-----------|
| PA1853NL | Pri. Inductance | (2-3) | 117.8µH ±10% | <p>FLYBACK TRANSFORMER</p> | |
| | Lk. Inductance | (2-3) with (6, 7, 8, 9, 10) shorted | 1.5µH MAX | | |
| | DCR | | (2-3) | | 330mΩ MAX |
| | | | (4-5) | | 240mΩ MAX |
| | | | (8-7) | | 35mΩ MAX |
| | | | (7-6) | | 472mΩ MAX |
| | | | (10-9) | | 17mΩ MAX |
| | Hi-Pot | Pri-Sec | 500Vrms | | |
| KI Factor | | 2968.8 | | | |
| PA2100NL | Pri. Inductance | (1-10) | 338µH ±15% | <p>ISOLATION TRANSFORMER</p> | |
| | Lk. Inductance | (1-10) with (5-6) shorted | 1.7µH MAX | | |
| | DCR | | (1-10) | | 76mΩ MAX |
| | | | (5-6) | | 92mΩ MAX |
| | Hi-Pot | Pri-Sec | 1000Vrms | | |
| KI Factor | | 1.24 | | | |
| PA2101NL | Pri. Inductance | (1-10) | 338µH ±15% | <p>ISOLATION TRANSFORMER</p> | |
| | Lk. Inductance | (1-10) with (5-6) shorted | 460µH MAX | | |
| | DCR | | (1-10) | | 82mΩ MAX |
| | | | (5-6) | | 82mΩ MAX |
| | Hi-Pot | Pri-Sec | 1000Vrms | | |
| KI Factor | | 1.24 | | | |

High Frequency Wire Wound Transformers

EF12.6 Platforms - SMT

Notes:

1. The temperature of the component (ambient plus temperature rise) must be within the stated operating temperature range.
2. The above transformers and inductors have been tested and approved by Pulse's power IC partners and are sited in the appropriate datasheet or evaluation board documentation at these companies. To determine which IC and IC partners are matched with the above Pulse part numbers please consult the IC Cross Reference on the Pulse website.
3. For flyback topology applications, it is necessary to ensure that the transformer will not saturate in the application. The peak flux density (Bpk) should remain below 2700Gauss. To calculate the peak density, use the following formula:

$$Bpk \text{ (Gauss)} = K1_Factor * Ipk \text{ (A)}$$
4. In high volt-sec applications, it is important to calculate the core loss of the transformer.

Approximate transformer core loss can be calculated as:

$$CoreLoss \text{ (W)} = 3.33E-14 * (Freq_kHz)^{1.63} * (\Delta B_Gauss)^{2.63}$$

where ΔB can be calculated as:


For Flyback Topology: $\Delta B = K1_Factor * (A)$

For Forward Topology: $\Delta B = K1_Factor * Volt\text{-}\mu\text{sec}$

5. Optional Tape & Reel packaging can be ordered by adding a "T" suffix to the part number (i.e. PA1853NL becomes PA1853NLT). Pulse complies with industry standard tape and reel specification EIA481. The tape and reel for this product has a width (W=32mm), pitch (Po=24mm) and depth (Ko=10.16mm).
6. The "NL" suffix indicates an RoHS-compliant part number. Non-NL suffixed parts are not necessarily RoHS compliant, but are electrically and mechanically equivalent to NL versions. If a part number does not have the "NL" suffix, but an RoHS compliant version is required, please contact Pulse for availability.

Mechanical

PAXXXXNL

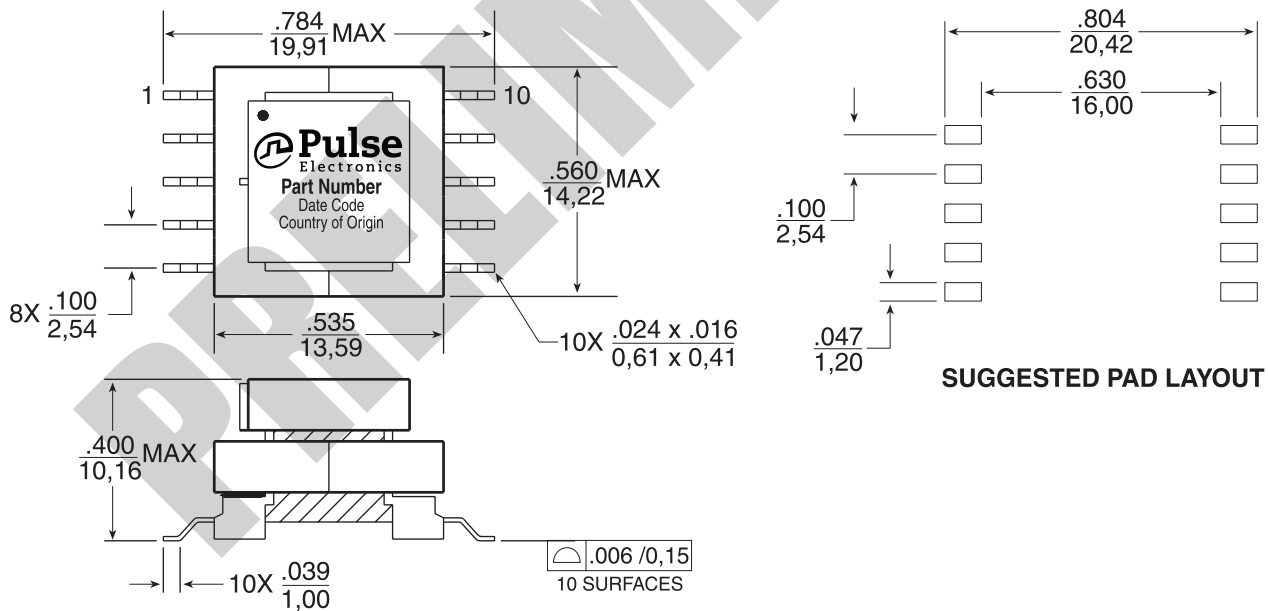

For More Information

Pulse Worldwide Headquarters

15255 Innovation Drive Ste 100
San Diego, CA 92128
U.S.A.

Pulse Europe

Pulse Electronics GmbH
Am Rottland 12
58540 Meinerzhagen
Germany

Pulse China Headquarters

Pulse Electronics (ShenZhen) CO., LTD
D708, Shenzhen Academy of
Aerospace Technology,
The 10th Keji South Road,
Nanshan District, Shenzhen,
P.R. China 518057

Pulse North China

Room 2704/2705
Super Ocean Finance Ctr.
2067 Yan An Road West
Shanghai 200336
China

Pulse South Asia

3 Fraser Street
0428 DUO Tower
Singapore 189352

Pulse North Asia

1F., No.111 Xiyuan Rd
Zhongli City
Taoyuan City 32057
Taiwan (R.O.C)

Tel: 858 674 8100
Fax: 858 674 8262

Tel: 49 2354 777 100
Fax: 49 2354 777 168

Tel: 86 755 33966678
Fax: 86 755 33966700

Tel: 86 21 62787060
Fax: 86 2162786973

Tel: 65 6287 8998
Fax: 65 6280 0080

Tel: 886 3 4356768
Fax: 886 3 4356820

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2018. Pulse Electronics, Inc. All rights reserved.