- **Qualified for Automotive Applications**
- **ESD Protection Exceeds 2000 V Per MIL-STD-883, Method 3015; Exceeds 200 V Using Machine Model (C = 200 pF, R = 0)**
- **Output Swing Includes Both Supply Rails**
- **Extended Common-Mode Input Voltage Range . . . 0 V to 4.5 V (Min) With 5-V Single Supply**
- **No Phase Inversion**
- **Low Noise . . . 18 nV/√Hz Typ at f = 1 kHz**
- **Low Input Offset Voltage 950 μV Max at T_A = 25°C (TLV2422A)**
- **Low Input Bias Current . . . 1 pA Typ**
- **Micropower Operation . . . 50 μA Per Channel**
- **600-Ω Output Drive**

D PACKAGE
(TOP VIEW)

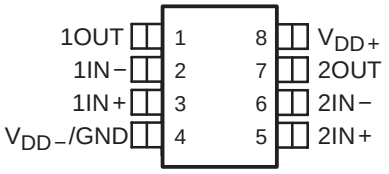

HIGH-LEVEL OUTPUT VOLTAGE
vs
HIGH-LEVEL OUTPUT CURRENT

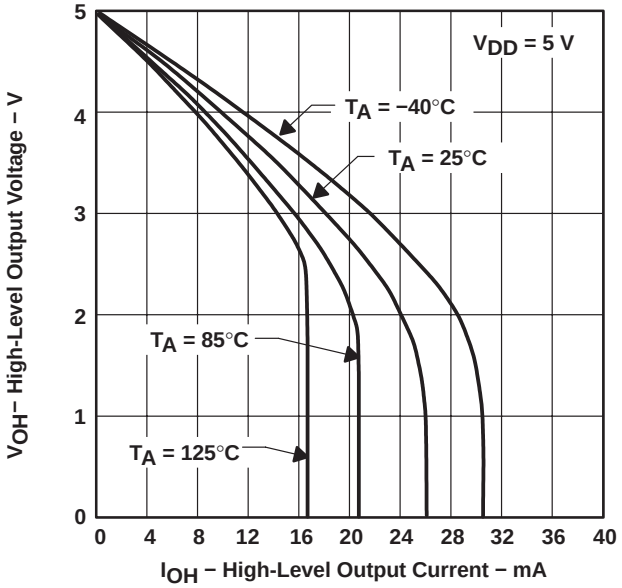

Figure 1

description

The TLV2422 and TLV2422A are dual low-voltage operational amplifiers from Texas Instruments. The common-mode input voltage range for this device has been extended over the typical CMOS amplifiers making them suitable for a wide range of applications. In addition, the devices do not phase invert when the common-mode input is driven to the supply rails. This satisfies most design requirements without paying a premium for rail-to-rail input performance. They also exhibit rail-to-rail output performance for increased dynamic range in single- or split-supply applications. This family is fully characterized at 3-V and 5-V supplies and is optimized for low-voltage operation. The TLV2422 only requires 50 μA of supply current per channel, making it ideal for battery-powered applications. The TLV2422 also has increased output drive over previous rail-to-rail operational amplifiers and can drive 600-Ω loads for telecom applications.

Other members in the TLV2422 family are the high-power, TLV2442, and low-power, TLV2432, versions.

The TLV2422, exhibiting high input impedance and low noise, is excellent for small-signal conditioning for high-impedance sources, such as piezoelectric transducers. Because of the micropower dissipation levels and low-voltage operation, these devices work well in hand-held monitoring and remote-sensing applications. In addition, the rail-to-rail output feature with single- or split-supplies makes this family a great choice when interfacing with analog-to-digital converters (ADCs). For precision applications, the TLV2422A is available with a maximum input offset voltage of 950 μV.

If the design requires single operational amplifiers, see the TI TLV2211/21/31. This is a family of rail-to-rail output operational amplifiers in the SOT-23 package. Their small size and low power consumption, make them ideal for high density, battery-powered equipment.

Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

Advanced LinCMOS is a trademark of Texas Instruments.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

Copyright © 2008, Texas Instruments Incorporated

ORDERING INFORMATION†

T_A	V_{IO}max AT 25°C	PACKAGE‡		ORDERABLE PART NUMBER	TOP-SIDE MARKING
−40°C to 125°C	950 µV	SOIC (D)	Tape and reel	TLV2422AQDRQ1	2422AQ
	2.5 mV	SOIC (D)	Tape and reel	TLV2422QDRQ1	2422Q1

† For the most current package and ordering information, see the Package Option Addendum at the end of this document, or see the TI web site at http://www.ti.com.
‡ Package drawings, thermal data, and symbolization are available at http://www.ti.com/packaging.

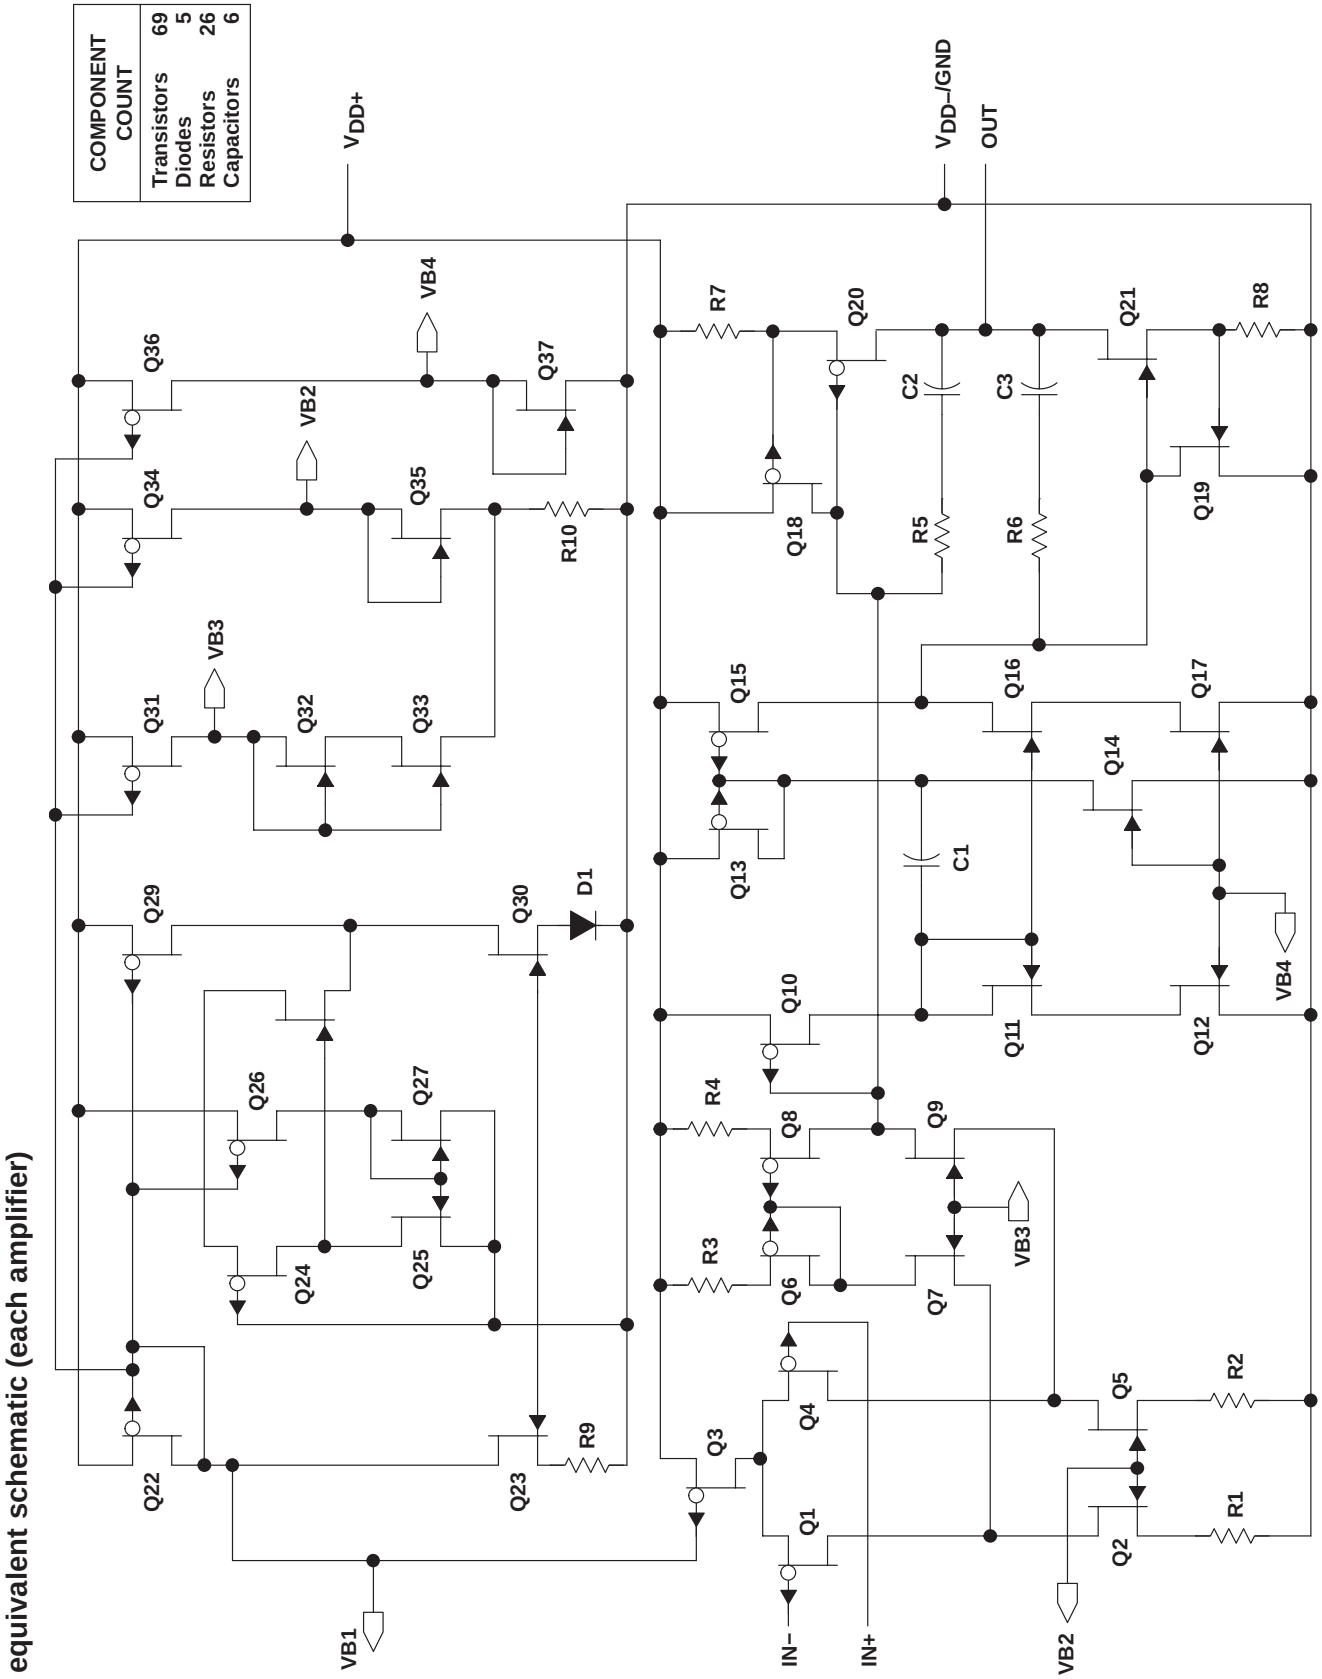

equivalent schematic (each amplifier)

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)†

Supply voltage, V_{DD} (see Note 1) . . . . . 12 V
Differential input voltage, V_{ID} (see Note 2) . . . . . $\pm V_{DD}$
Input voltage, V_I (any input, see Note 1): C and I suffix . . . . . −0.3 V to V_{DD}
Input current, I_I (each input) . . . . . ±5 mA
Output current, I_O . . . . . ±50 mA
Total current into V_{DD+} . . . . . ±50 mA
Total current out of V_{DD-} . . . . . ±50 mA
Duration of short-circuit current at (or below) 25°C (see Note 3) . . . . . unlimited
Continuous total power dissipation . . . . . See Dissipation Rating Table
Operating free-air temperature range, T_A: Q suffix . . . . . −40°C to 125°C
Storage temperature range, T_{stg} . . . . . −65°C to 150°C
Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds . . . . . 260°C

† Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTES: 1. All voltage values, except differential voltages, are with respect to the midpoint between V_{DD+} and V_{DD-}.
2. Differential voltages are at IN+ with respect to IN−. Excessive current flows if input is brought below V_{DD-} − 0.3 V.
3. The output may be shorted to either supply. Temperature and/or supply voltages must be limited to ensure that the maximum dissipation rating is not exceeded.

DISSIPATION RATING TABLE

PACKAGE	$T_A \le 25°C$ POWER RATING	DERATING FACTOR ABOVE $T_A = 25°C$	$T_A = 70°C$ POWER RATING	$T_A = 85°C$ POWER RATING	$T_A = 125°C$ POWER RATING
D	725 mW	5.8 mW/°C	464 mW	377 mW	145 mW

recommended operating conditions

	MIN	MAX	UNIT
Supply voltage, $V_{DD\pm}$	2.7	10	V
Input voltage range, V_I	V_{DD-}	V_{DD+} −0.8	V
Common-mode input voltage, V_{IC}	V_{DD-}	V_{DD+} −0.8	V
Operating free-air temperature, T_A	−40	125	°C

electrical characteristics at specified free-air temperature, V_{DD} = 3 V (unless otherwise noted)

PARAMETER		TEST CONDITIONS		T_A†	TLV2422-Q1 MIN	TLV2422-Q1 TYP	TLV2422-Q1 MAX	TLV2422A-Q1 MIN	TLV2422A-Q1 TYP	TLV2422A-Q1 MAX	UNIT
V_{IO}	Input offset voltage	V_{IC} = 0, V_O = 0,	$V_{DD}\pm$ = ±1.5 V, R_S = 50 Ω	25°C		300	2000		300	950	µV
				Full range			2500			1800	
α_{VIO}	Temperature coefficient of input offset voltage			Full range		2			2		µV/°C
	Input offset voltage long-term drift (see Note 4)			25°C		0.003			0.003		µV/mo
I_{IO}	Input offset current			25°C		0.5	60		0.5	60	pA
				Full range			150			150	
I_{IB}	Input bias current			25°C		1	60		1	60	pA
				Full range			300			300	
V_{ICR}	Common-mode input voltage range	$\|V_{IO}\| \le$ 5 mV,	R_S = 50 Ω	25°C	0 to 2.5	−0.25 to 2.75		0 to 2.5	−0.25 to 2.75		V
				Full range	0 to 2.2			0 to 2.2			
V_{OH}	High-level output voltage	I_{OH} = −100 µA		25°C		2.97			2.97		V
		I_{OH} = −500 µA		25°C		2.75			2.75		
				Full range	2.5			2.5			
V_{OL}	Low-level output voltage	V_{IC} = 0,	I_{OL} = 100 µA	25°C		0.05			0.05		V
		V_{IC} = 0,	I_{OL} = 250 µA	25°C		0.2			0.2		
				Full range			0.5			0.5	
A_{VD}	Large-signal differential voltage amplification	V_{IC} = 1.5 V, V_O = 1 V to 2 V	R_L = 10 kΩ‡	25°C	6	10		6	10		V/mV
				Full range	2			2			
			R_L = 1 MΩ‡	25°C		700			700		
$r_{i(d)}$	Differential input resistance			25°C		10^{12}			10^{12}		Ω
$r_{i(c)}$	Common-mode input resistance			25°C		10^{12}			10^{12}		Ω
$c_{i(c)}$	Common-mode input capacitance	f = 10 kHz		25°C		8			8		pF
z_o	Closed-loop output impedance	f = 100 kHz,	A_V = 10	25°C		130			130		Ω
CMRR	Common-mode rejection ratio	V_{IC} = V_{ICR} min, R_S = 50 Ω	V_O = 1.5 V,	25°C	70	83		70	83		dB
				Full range	70			70			
k_{SVR}	Supply-voltage rejection ratio ($\Delta V_{DD}/\Delta V_{IO}$)	V_{DD} = 2.7 V to 8 V, V_{IC} = V_{DD}/2,	No load	25°C	80	95		80	95		dB
				Full range	80			80			
I_{DD}	Supply current	V_O = 1.5 V,	No load	25°C		100	150		100	150	µA
				Full range			175			175	

† Full range is −40°C to 125°C for Q level part.
‡ Referenced to 1.5 V
NOTE 4: Typical values are based on the input offset voltage shift observed through 500 hours of operating life test at T_A = 150°C extrapolated to T_A = 25°C using the Arrhenius equation and assuming an activation energy of 0.96 eV.

operating characteristics at specified free-air temperature, V_{DD} = 3 V

PARAMETER		TEST CONDITIONS		T_A†	TLV2422-Q1, TLV2422A-Q1 MIN	TYP	MAX	UNIT
SR	Slew rate at unity gain	V_O = 1.1 V to 1.9 V, C_L = 100 pF‡	R_L = 10 kΩ‡,	25°C	0.01	0.02		V/µs
				Full range	0.008			
V_n	Equivalent input noise voltage	f = 10 Hz		25°C		100		nV/√Hz
		f = 1 kHz		25°C		23		
$V_{N(PP)}$	Peak-to-peak equivalent input noise voltage	f = 0.1 Hz to 1 Hz		25°C		2.7		µV
		f = 0.1 Hz to 10 Hz		25°C		4		
I_n	Equivalent input noise current			25°C		0.6		fA√Hz
THD + N	Total harmonic distortion plus noise	V_O = 0.5 V to 2.5 V, f = 1 kHz, R_L = 10 kΩ‡	A_V = 1	25°C		0.25%		
			A_V = 10			1.8%		
	Gain-bandwidth product	f = 10 kHz, C_L = 100 pF‡	R_L = 10 kΩ‡,	25°C		46		kHz
B_{OM}	Maximum output-swing bandwidth	$V_{O(PP)}$ = 1 V, R_L = 10 kΩ‡,	A_V = 1, C_L = 100 pF‡	25°C		8.3		kHz
t_s	Settling time	A_V = −1, Step = 0.5 V to 2.5 V, R_L = 10 kΩ‡, C_L = 100 pF‡	To 0.1%	25°C		8.6		µs
			To 0.01%			16		
ϕ_m	Phase margin at unity gain	R_L = 10 kΩ‡,	C_L = 100 pF‡	25°C		62°		
	Gain margin			25°C		11		dB

† Full range is −40°C to 125°C for Q level part.
‡ Referenced to 1.5 V

electrical characteristics at specified free-air temperature, V_{DD} = 5 V (unless otherwise noted)

PARAMETER		TEST CONDITIONS		T_A†	TLV2422-Q1 MIN	TLV2422-Q1 TYP	TLV2422-Q1 MAX	TLV2422A-Q1 MIN	TLV2422A-Q1 TYP	TLV2422A-Q1 MAX	UNIT
V_{IO}	Input offset voltage	V_{IC} = 0, V_O = 0,	$V_{DD}\pm$ = ±2.5 V, R_S = 50 Ω	25°C		300	2000		300	950	µV
				Full range			2500			1800	
α_{VIO}	Temperature coefficient of input offset voltage			Full range		2			2		µV/°C
	Input offset voltage long-term drift (see Note 4)			25°C		0.003			0.003		µV/mo
I_{IO}	Input offset current			25°C		0.5	60		0.5	60	pA
				Full range			150			150	
I_{IB}	Input bias current			25°C		1	60		1	60	pA
				Full range			300			300	
V_{ICR}	Common-mode input voltage range	$\|V_{IO}\| \le$ 5 mV,	R_S = 50 Ω	25°C	0 to 4.5	−0.25 to 4.75		0 to 4.5	−0.25 to 4.75		V
				Full range	0 to 4.2			0 to 4.2			
V_{OH}	High-level output voltage	I_{OH} = −100 µA		25°C		4.97			4.97		V
		I_{OH} = −1 mA		25°C		4.75			4.75		
				Full range	4.5			4.5			
V_{OL}	Low-level output voltage	V_{IC} = 2.5 V,	I_{OL} = 100 µA	25°C		0.04			0.04		V
		V_{IC} = 2.5 V,	I_{OL} = 500 µA	25°C		0.15			0.15		
				Full range			0.5			0.5	
A_{VD}	Large-signal differential voltage amplification	V_{IC} = 2.5 V, V_O = 1 V to 4 V	R_L = 10 kΩ‡	25°C	8	12		8	12		V/mV
				Full range	3			3			
			R_L = 1 MΩ‡	25°C		1000			1000		
$r_{i(d)}$	Differential input resistance			25°C		10^{12}			10^{12}		Ω
$r_{i(c)}$	Common-mode input resistance			25°C		10^{12}			10^{12}		Ω
$c_{i(c)}$	Common-mode input capacitance	f = 10 kHz		25°C		8			8		pF
z_o	Closed-loop output impedance	f = 100 kHz,	A_V = 10	25°C		130			130		Ω
CMRR	Common-mode rejection ratio	V_{IC} = V_{ICR} min, R_S = 50 Ω	V_O = 2.5 V,	25°C	70	90		70	90		dB
				Full range	70			70			
k_{SVR}	Supply-voltage rejection ratio ($\Delta V_{DD}/\Delta V_{IO}$)	V_{DD} = 4.4 V to 8 V, V_{IC} = V_{DD}/2,	No load	25°C	80	95		80	95		dB
				Full range	80			80			
I_{DD}	Supply current	V_O = 2.5 V,	No load	25°C		100	150		100	150	µA
				Full range			175			175	

† Full range is −40°C to 125°C for Q level part.
‡ Referenced to 2.5 V
NOTE 4: Typical values are based on the input offset voltage shift observed through 500 hours of operating life test at T_A = 150°C extrapolated to T_A = 25°C using the Arrhenius equation and assuming an activation energy of 0.96 eV.

operating characteristics at specified free-air temperature, V_{DD} = 5 V

PARAMETER		TEST CONDITIONS		T_A†	TLV2422-Q1, TLV2422A-Q1 MIN	TYP	MAX	UNIT
SR	Slew rate at unity gain	V_O = 1.5 V to 3.5 V, C_L = 100 pF‡	R_L = 10 kΩ‡,	25°C	0.01	0.02		V/µs
				Full range	0.008			
V_n	Equivalent input noise voltage	f = 10 Hz		25°C		100		nV/√Hz
		f = 1 kHz		25°C		18		
$V_{N(PP)}$	Peak-to-peak equivalent input noise voltage	f = 0.1 Hz to 1 Hz		25°C		1.9		µV
		f = 0.1 Hz to 10 Hz		25°C		2.8		
I_n	Equivalent input noise current			25°C		0.6		fA√Hz
THD + N	Total harmonic distortion plus noise	V_O = 1.5 V to 3.5 V, f = 1 kHz, R_L = 10 kΩ‡	A_V = 1	25°C		0.24%		
			A_V = 10			1.7%		
	Gain-bandwidth product	f = 10 kHz, C_L = 100 pF‡	R_L =10 kΩ‡,	25°C		52		kHz
B_{OM}	Maximum output-swing bandwidth	$V_{O(PP)}$ = 2 V, R_L = 10 kΩ‡,	A_V = 1, C_L = 100 pF‡	25°C		5.3		kHz
t_s	Settling time	A_V = −1, Step = 1.5 V to 3.5 V, R_L = 10 kΩ‡, C_L = 100 pF‡	To 0.1%	25°C		8.5		µs
			To 0.01%			15.5		
ϕ_m	Phase margin at unity gain	R_L = 10 kΩ‡,	C_L = 100 pF‡	25°C		66°		
	Gain margin			25°C		11		dB

† Full range is −40°C to 125°C for Q level part.
‡ Referenced to 2.5 V

TYPICAL CHARACTERISTICS

Table of Graphs

			FIGURE
V_{IO}	Input offset voltage	Distribution vs Common-mode input voltage	2,3 4,5
α_{VIO}	Input offset voltage temperature coefficient	Distribution	6,7
I_{IB}/I_{IO}	Input bias and input offset currents	vs Free-air temperature	8
V_{OH}	High-level output voltage	vs High-level output current	9,11
V_{OL}	Low-level output voltage	vs Low-level output current	10,12
$V_{O(PP)}$	Maximum peak-to-peak output voltage	vs Frequency	13
I_{OS}	Short-circuit output current	vs Supply voltage vs Free-air temperature	14 15
V_{ID}	Differential input voltage	vs Output voltage	16,17
	Differential gain	vs Load resistance	18
A_{VD}	Large-signal differential voltage amplification Differential voltage amplification	vs Frequency vs Free-air temperature	19,20 21,22
z_o	Output impedance	vs Frequency	23,24
CMRR	Common-mode rejection ratio	vs Frequency vs Free-air temperature	25 26
k_{SVR}	Supply-voltage rejection ratio	vs Frequency vs Free-air temperature	27,28 29
I_{DD}	Supply current	vs Supply voltage	30
SR	Slew rate	vs Load capacitance vs Free-air temperature	31 32
V_O	Inverting large-signal pulse response		33,34
V_O	Voltage-follower large-signal pulse response		35,36
V_O	Inverting small-signal pulse response		37,38
V_O	Voltage-follower small-signal pulse response		39,40
V_n	Equivalent input noise voltage	vs Frequency	41, 42
	Noise voltage (referred to input)	Over a 10-second period	43
THD + N	Total harmonic distortion plus noise	vs Frequency	44,45
	Gain-bandwidth product	vs Supply voltage vs Free-air temperature	46 47
ϕ_m	Phase margin	vs Frequency vs Load capacitance	19,20 48
	Gain margin	vs Load capacitance	49
B_1	Unity-gain bandwidth	vs Load capacitance	50

TYPICAL CHARACTERISTICS

DISTRIBUTION OF TLV2422 INPUT OFFSET VOLTAGE

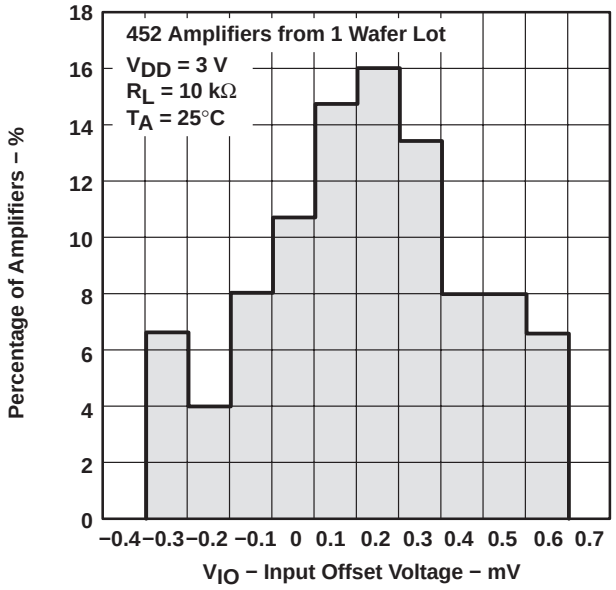

Figure 2

DISTRIBUTION OF TLV2422 INPUT OFFSET VOLTAGE

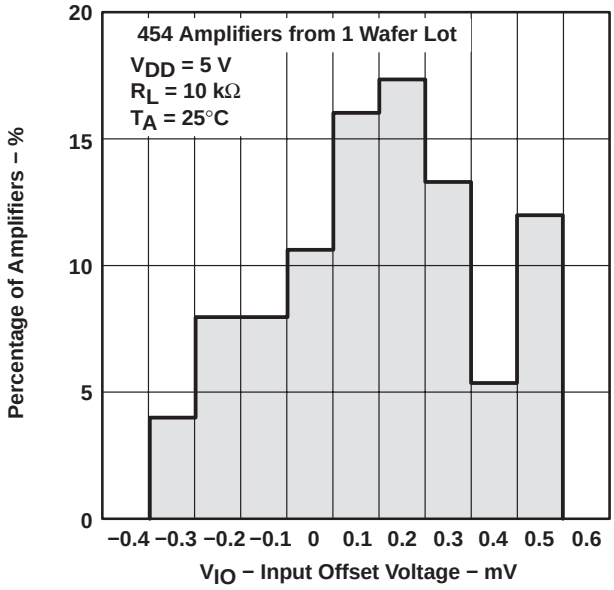

Figure 3

INPUT OFFSET VOLTAGE vs COMMON-MODE INPUT VOLTAGE

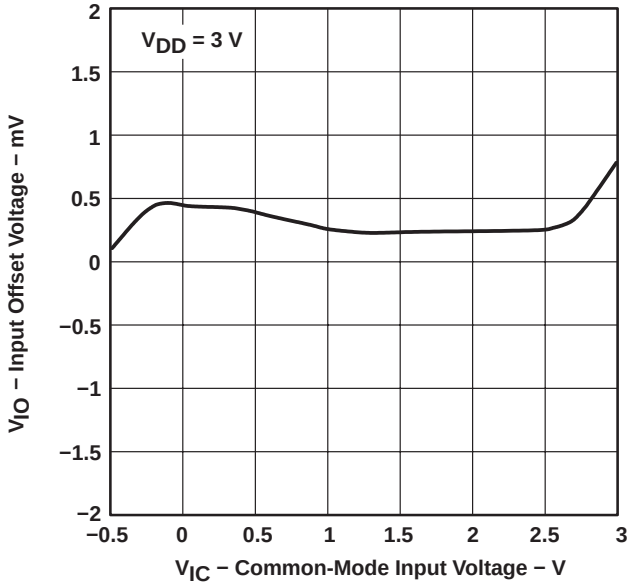

Figure 4

INPUT OFFSET VOLTAGE vs COMMON-MODE INPUT VOLTAGE

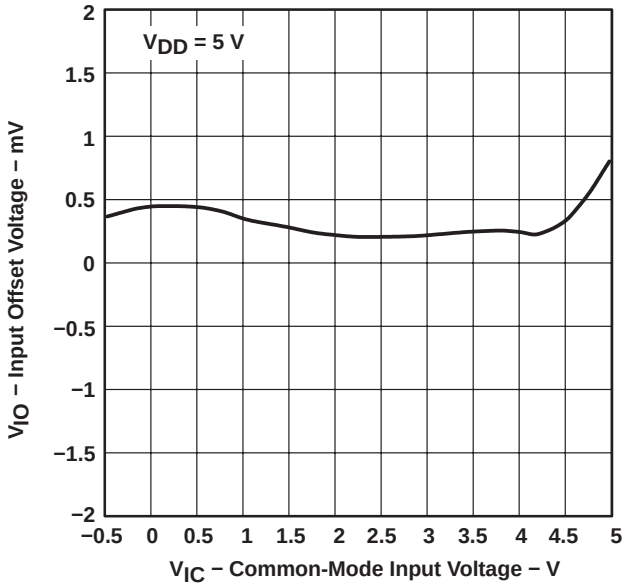

Figure 5

TYPICAL CHARACTERISTICS

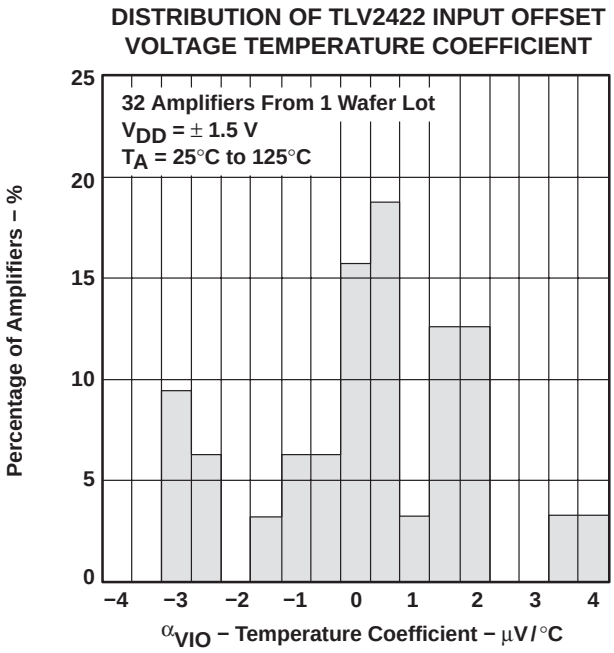

Figure 6

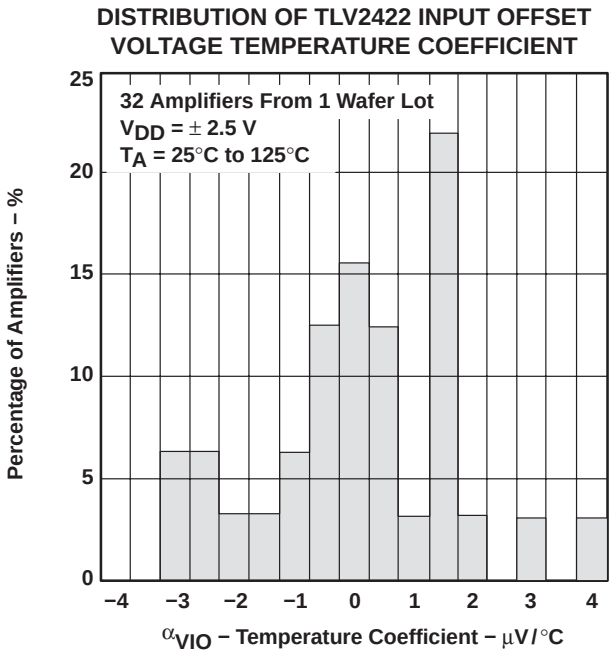

Figure 7

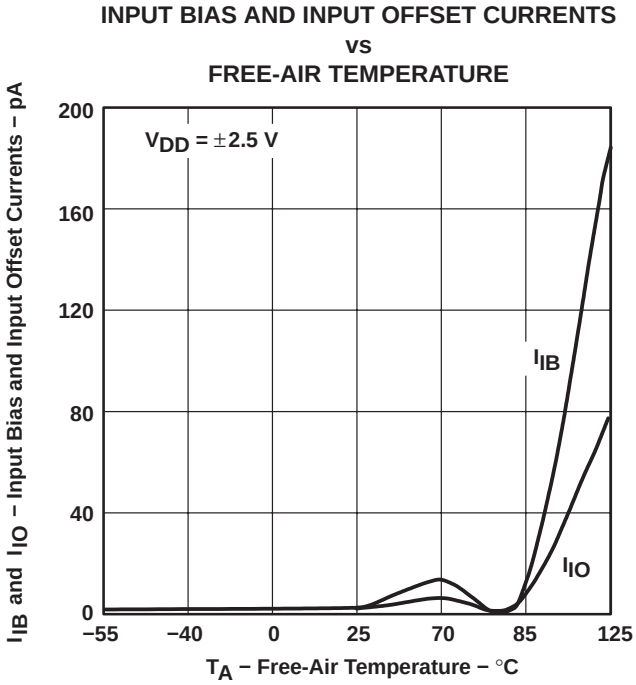

Figure 8

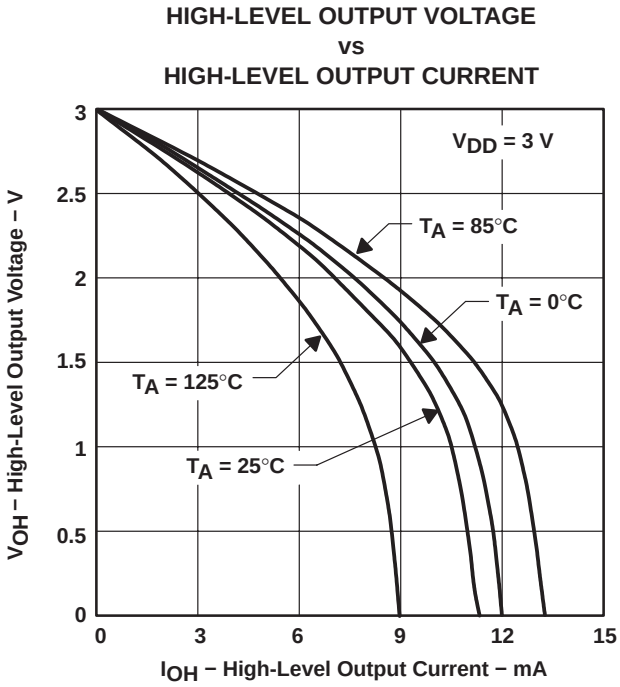

Figure 9

TYPICAL CHARACTERISTICS

LOW-LEVEL OUTPUT VOLTAGE vs LOW-LEVEL OUTPUT CURRENT

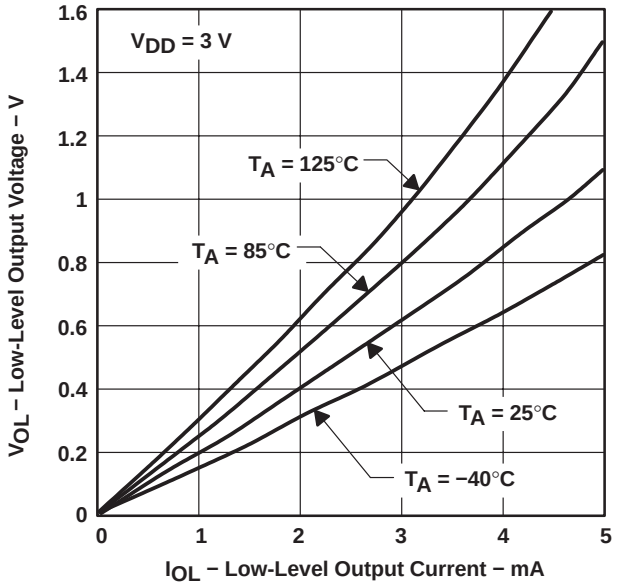

Figure 10

HIGH-LEVEL OUTPUT VOLTAGE vs HIGH-LEVEL OUTPUT CURRENT

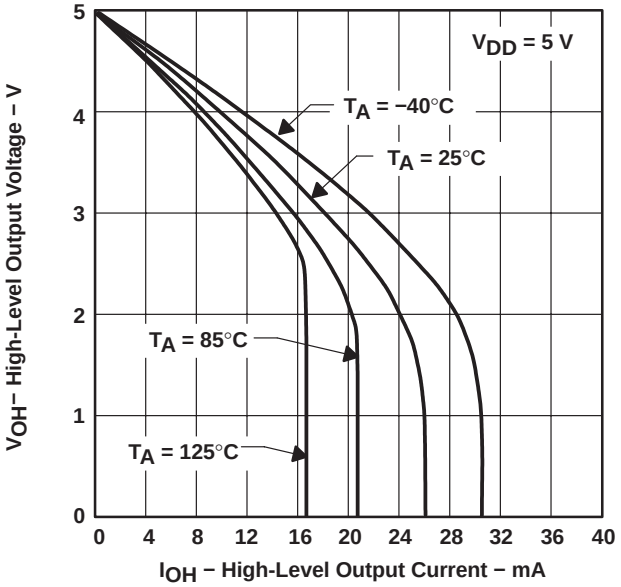

Figure 11

LOW-LEVEL OUTPUT VOLTAGE vs LOW-LEVEL OUTPUT CURRENT

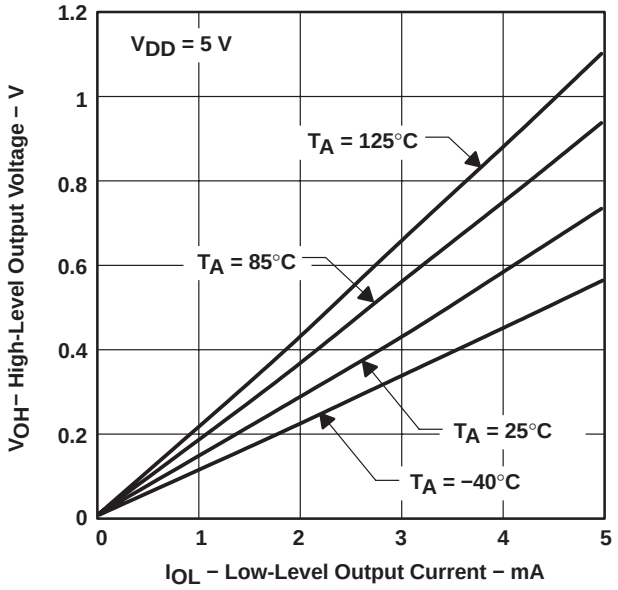

Figure 12

MAXIMUM PEAK-TO-PEAK OUTPUT VOLTAGE vs FREQUENCY

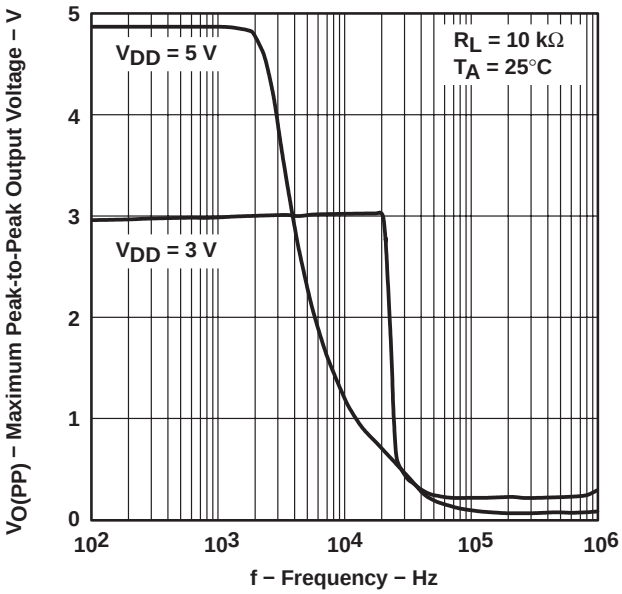

Figure 13

TYPICAL CHARACTERISTICS

SHORT-CIRCUIT OUTPUT CURRENT vs SUPPLY VOLTAGE

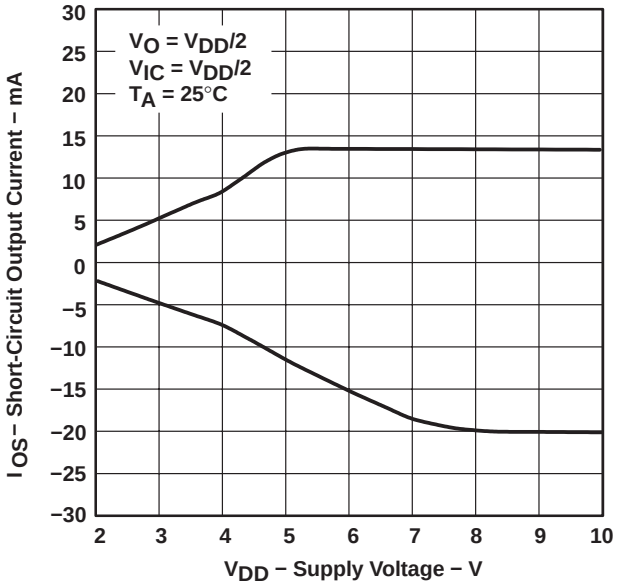

Figure 14

SHORT-CIRCUIT OUTPUT CURRENT vs FREE-AIR TEMPERATURE

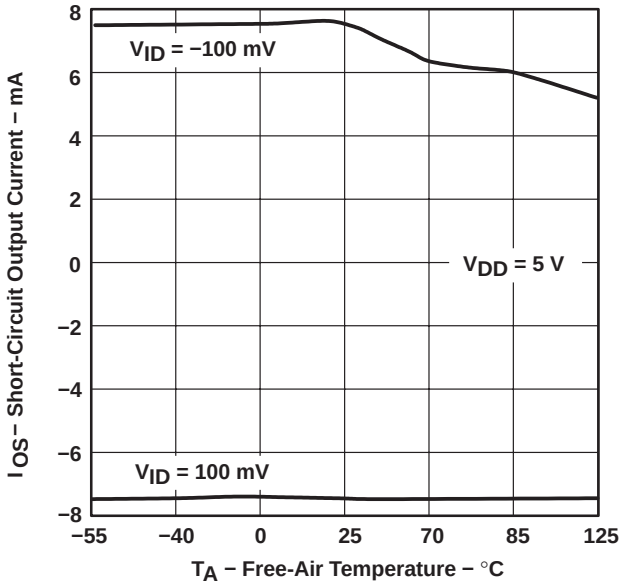

Figure 15

DIFFERENTIAL INPUT VOLTAGE vs OUTPUT VOLTAGE

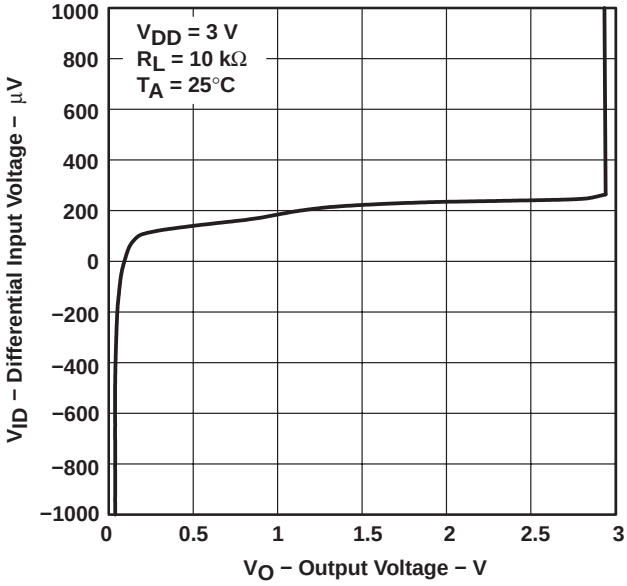

Figure 16

DIFFERENTIAL INPUT VOLTAGE vs OUTPUT VOLTAGE

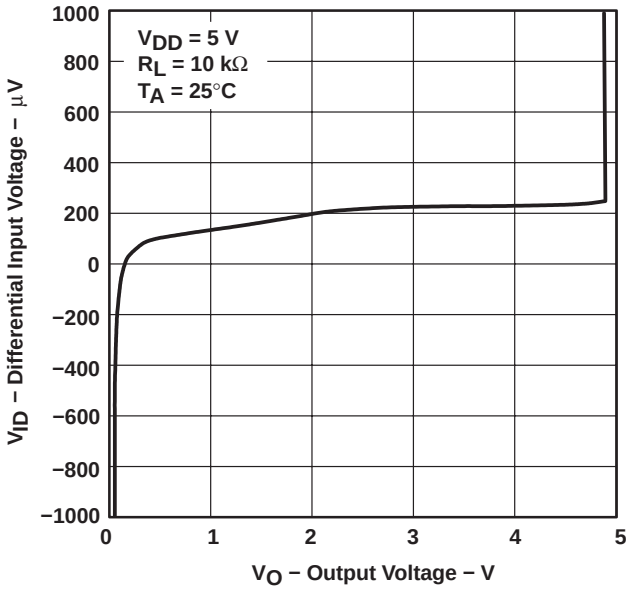

Figure 17

TYPICAL CHARACTERISTICS

DIFFERENTIAL GAIN vs LOAD RESISTANCE

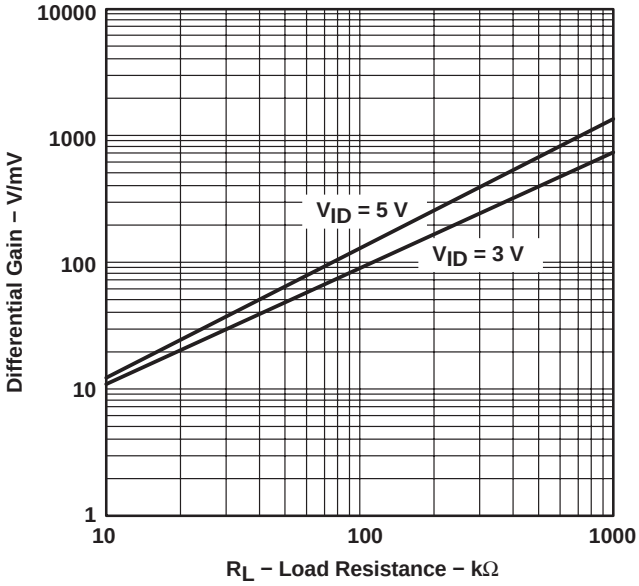

Figure 18

LARGE-SIGNAL DIFFERENTIAL VOLTAGE AMPLIFICATION AND PHASE MARGIN vs FREQUENCY

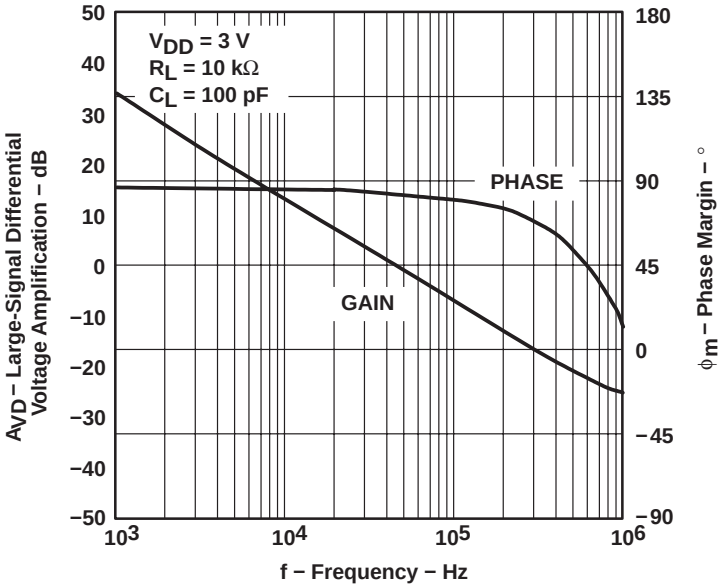

Figure 19

TYPICAL CHARACTERISTICS

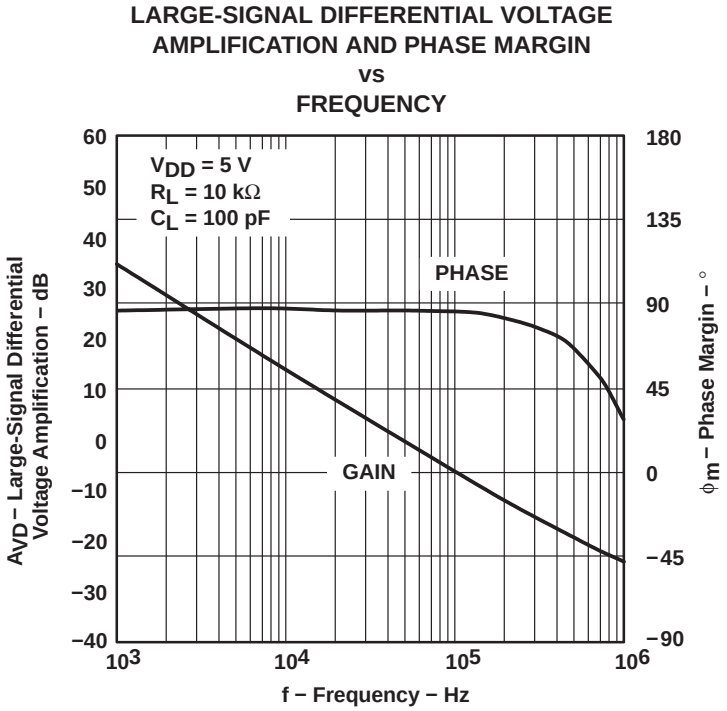

Figure 20

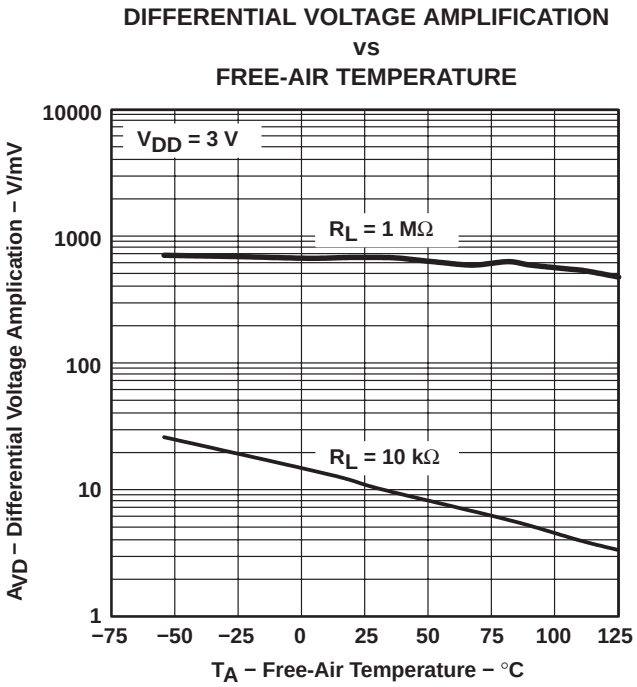

Figure 21

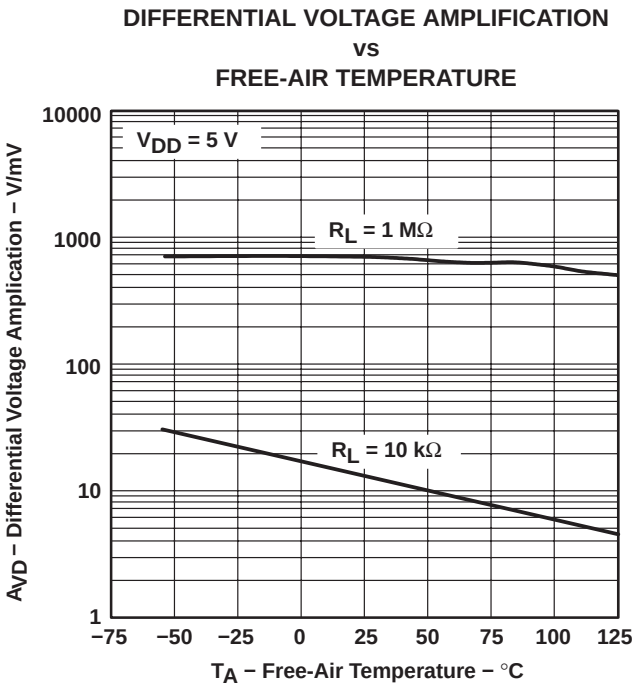

Figure 22

TYPICAL CHARACTERISTICS

OUTPUT IMPEDANCE vs FREQUENCY

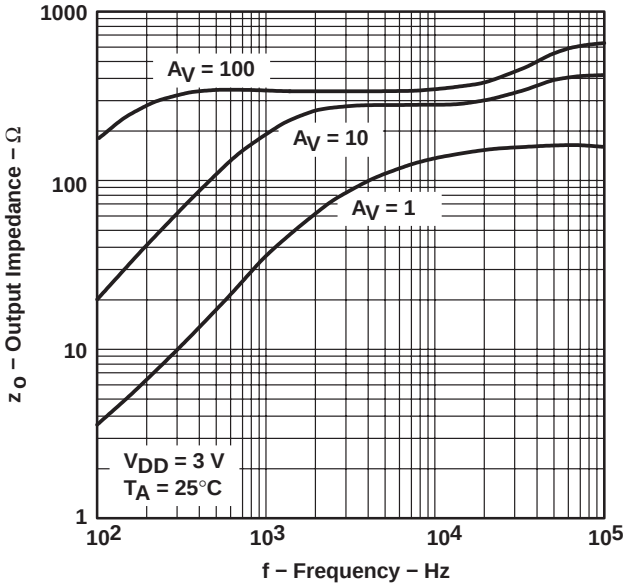

Figure 23

OUTPUT IMPEDANCE vs FREQUENCY

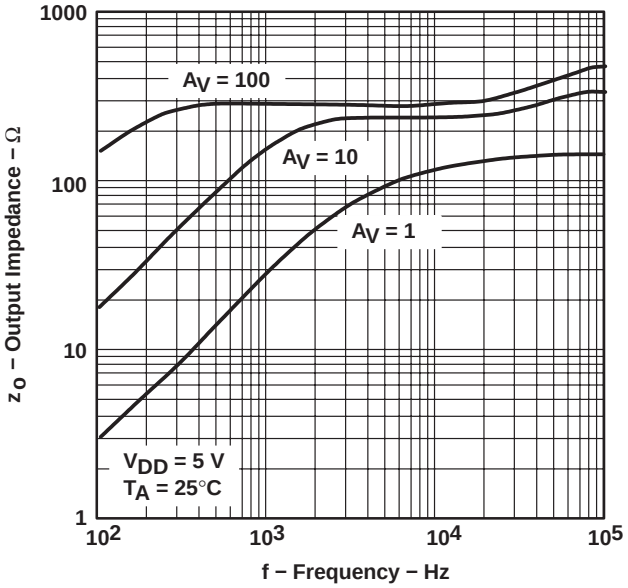

Figure 24

COMMON-MODE REJECTION RATIO vs FREQUENCY

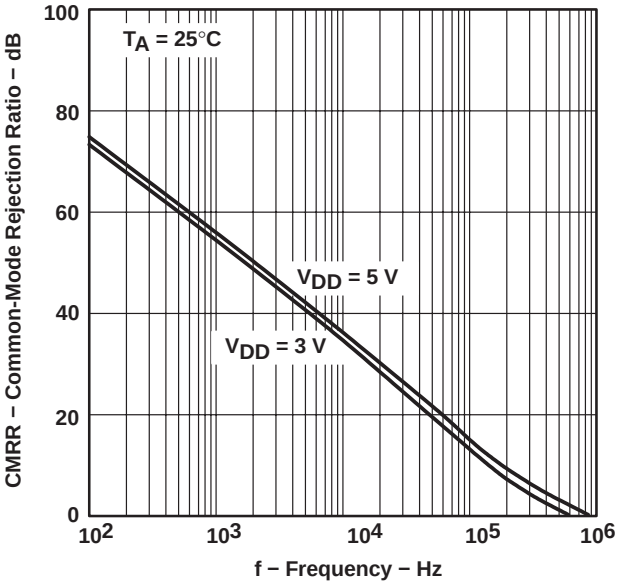

Figure 25

COMMON-MODE REJECTION RATIO vs FREE-AIR TEMPERATURE

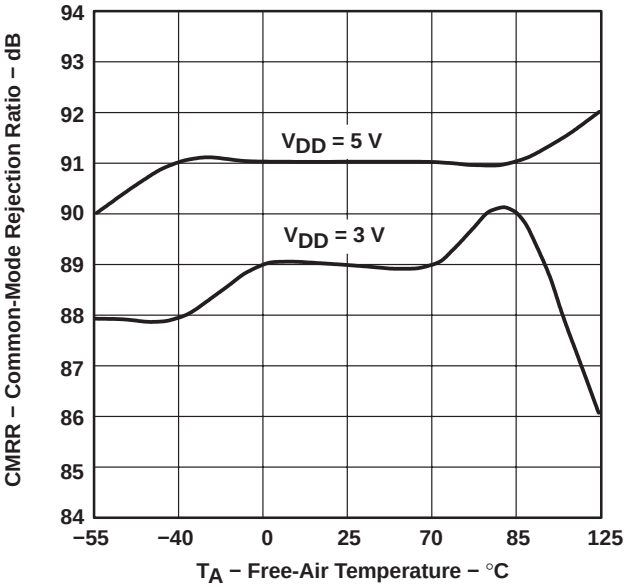

Figure 26

TYPICAL CHARACTERISTICS

SUPPLY-VOLTAGE REJECTION RATIO vs FREQUENCY

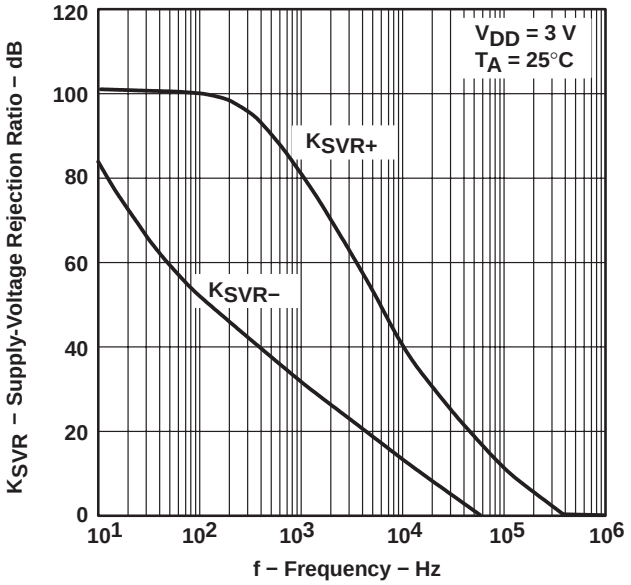

Figure 27

SUPPLY-VOLTAGE REJECTION RATIO vs FREQUENCY

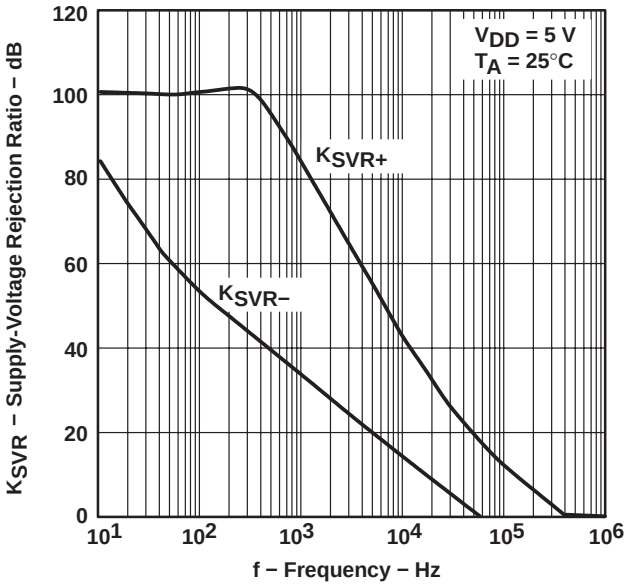

Figure 28

SUPPLY-VOLTAGE REJECTION RATIO vs FREE-AIR TEMPERATURE

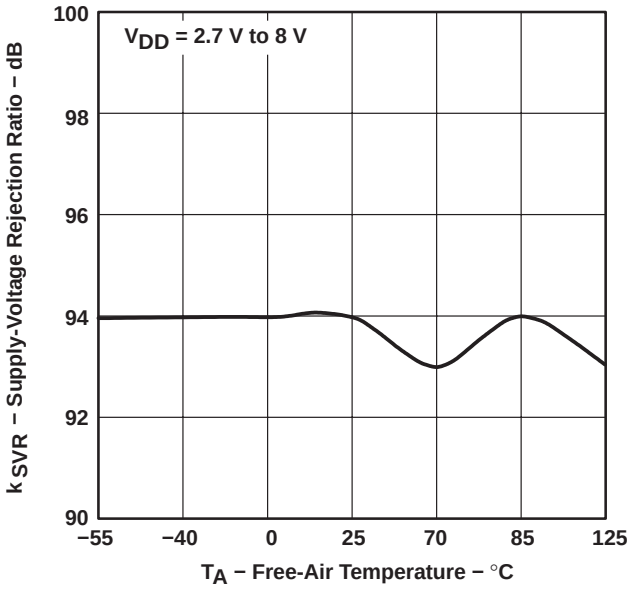

Figure 29

SUPPLY CURRENT vs SUPPLY VOLTAGE

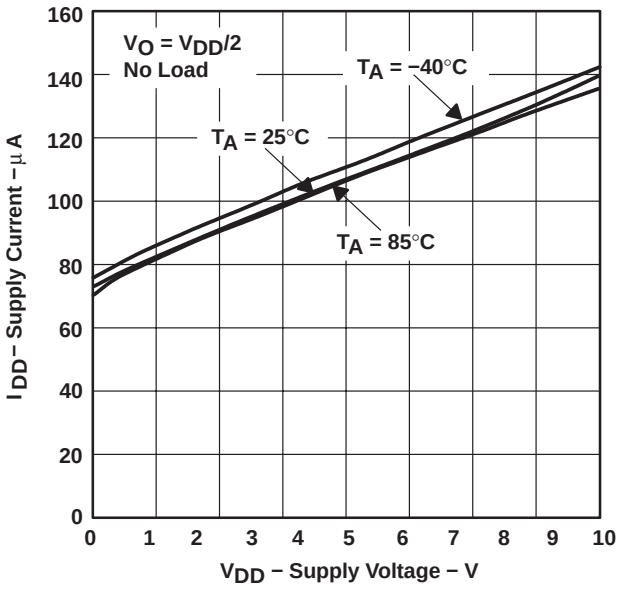

Figure 30

TYPICAL CHARACTERISTICS

SLEW RATE vs LOAD CAPACITANCE

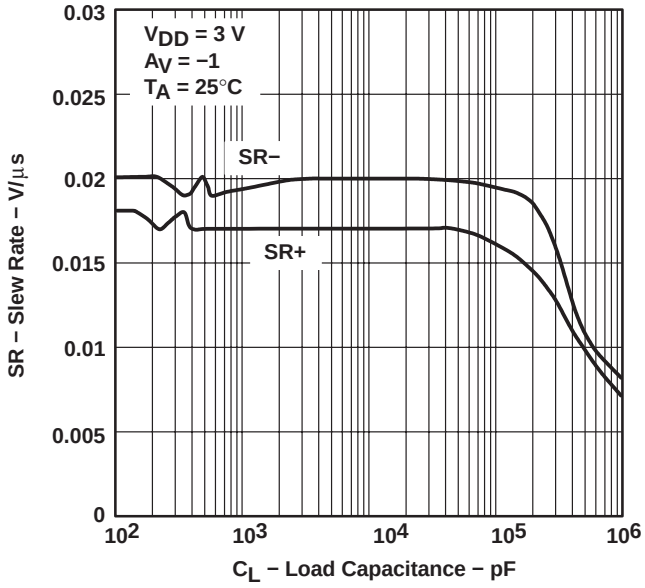

Figure 31

SLEW RATE vs FREE-AIR TEMPERATURE

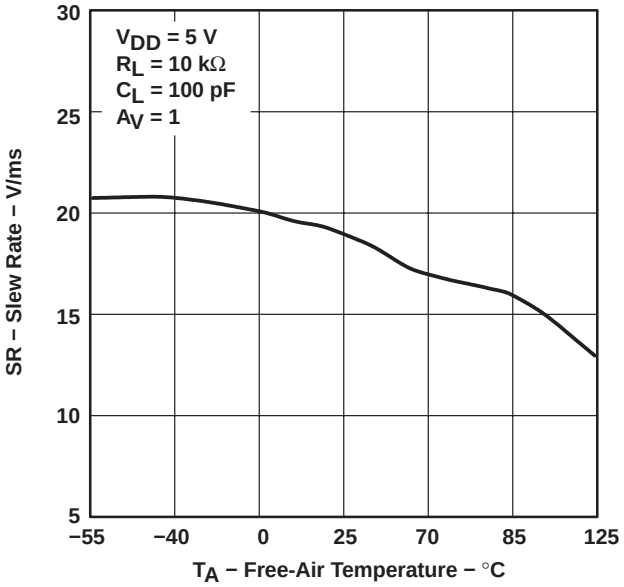

Figure 32

INVERTING LARGE-SIGNAL PULSE RESPONSE

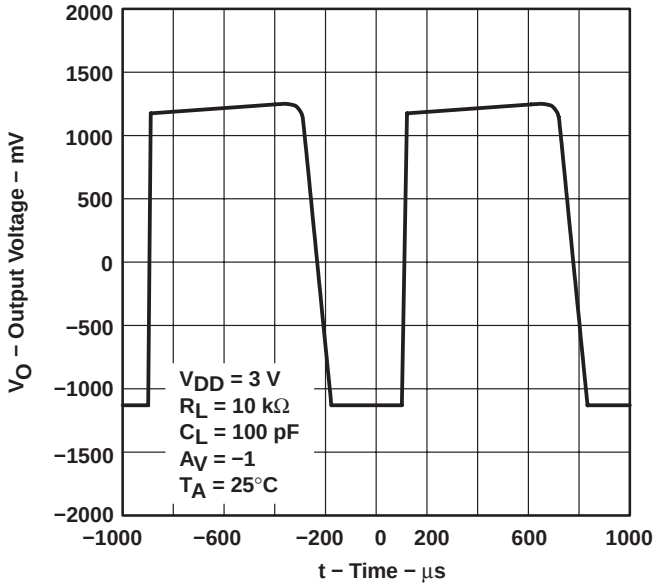

Figure 33

INVERTING LARGE-SIGNAL PULSE RESPONSE

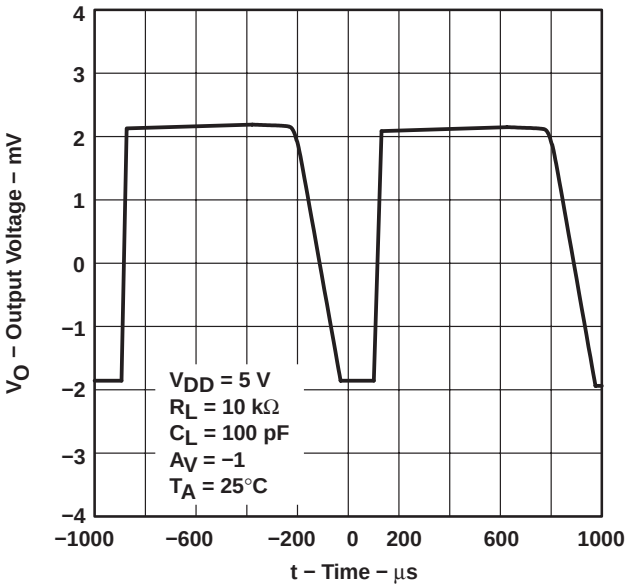

Figure 34

TYPICAL CHARACTERISTICS

VOLTAGE-FOLLOWER LARGE-SIGNAL PULSE RESPONSE

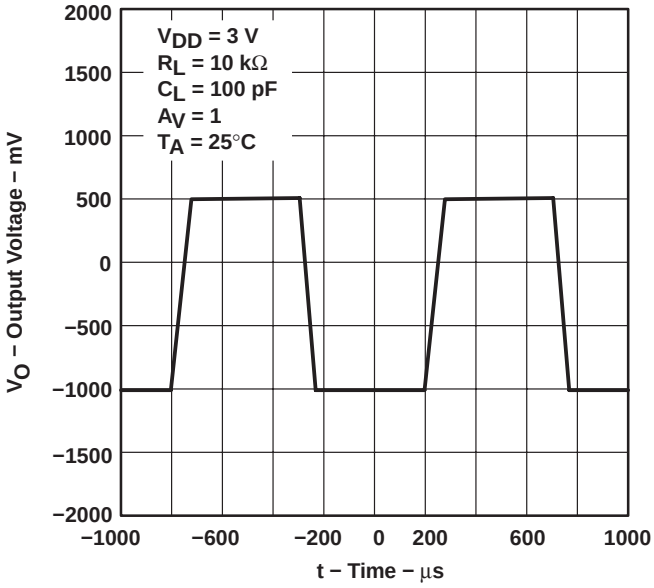

Figure 35

VOLTAGE-FOLLOWER LARGE-SIGNAL PULSE RESPONSE

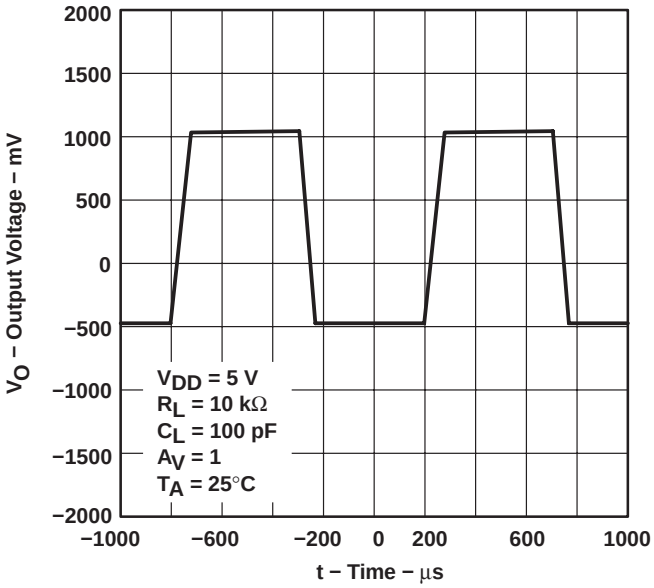

Figure 36

INVERTING SMALL-SIGNAL PULSE RESPONSE

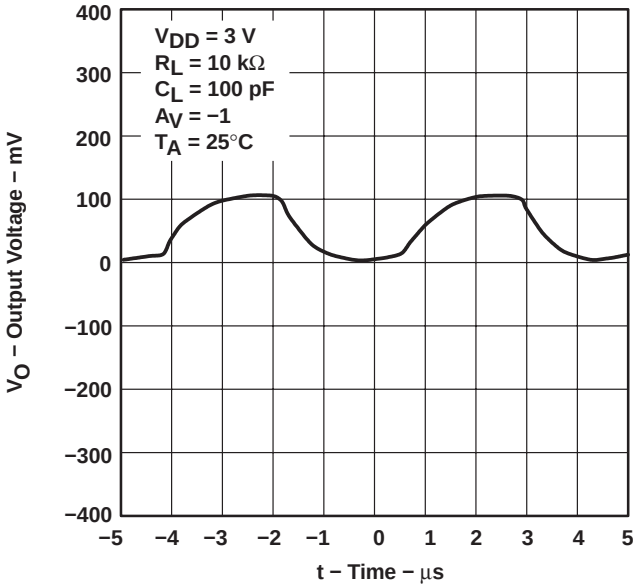

Figure 37

INVERTING SMALL-SIGNAL PULSE RESPONSE

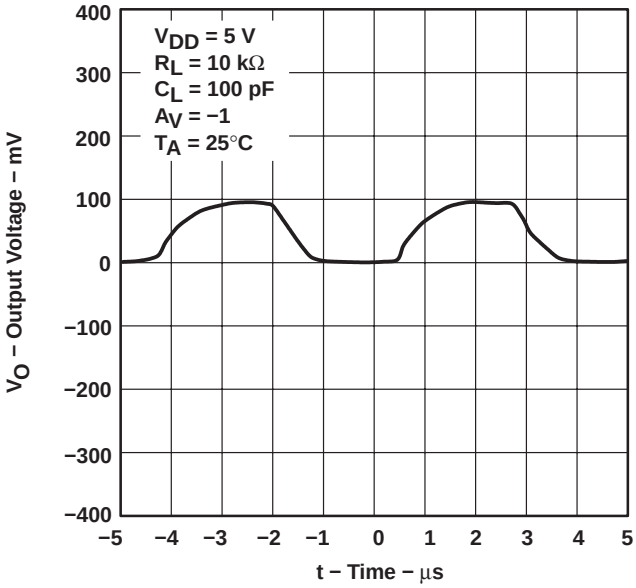

Figure 38

TYPICAL CHARACTERISTICS

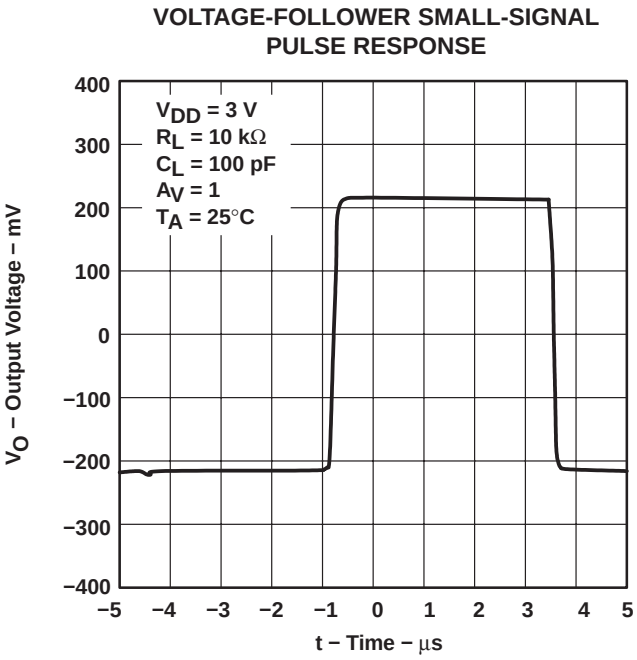

Figure 39

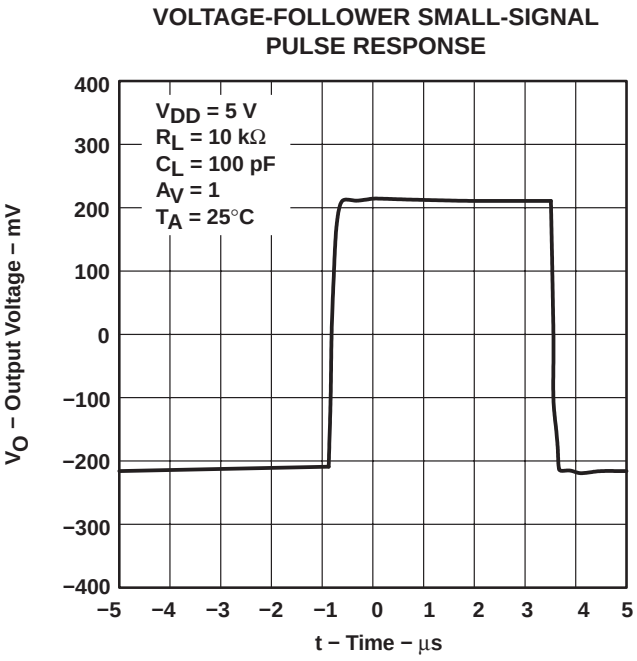

Figure 40

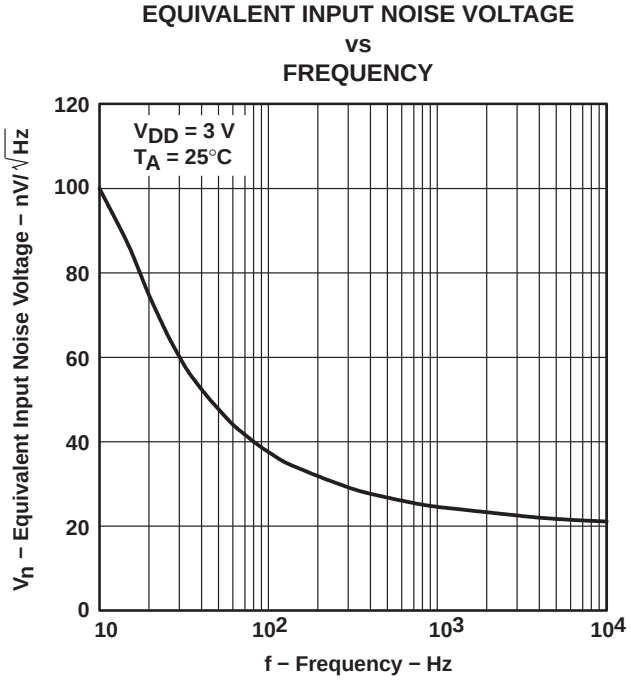

Figure 41

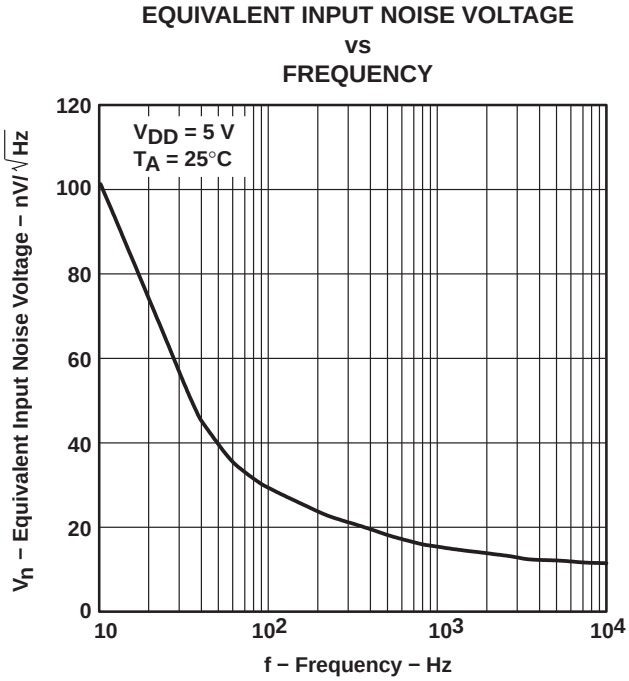

Figure 42

TYPICAL CHARACTERISTICS

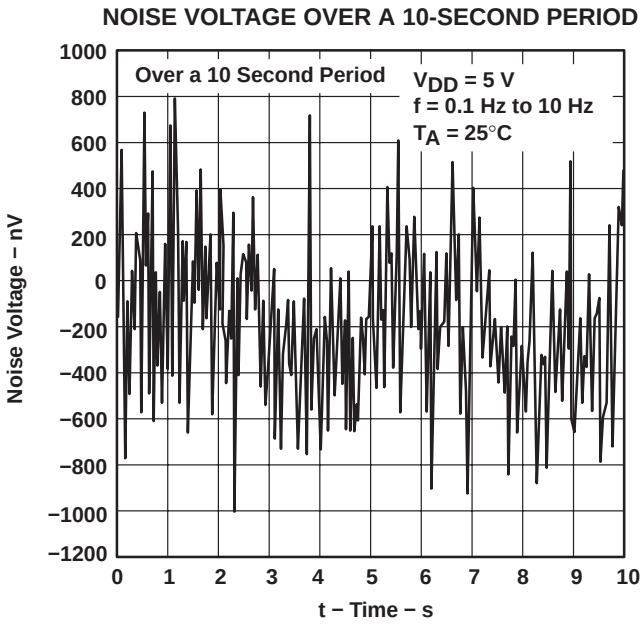

Figure 43

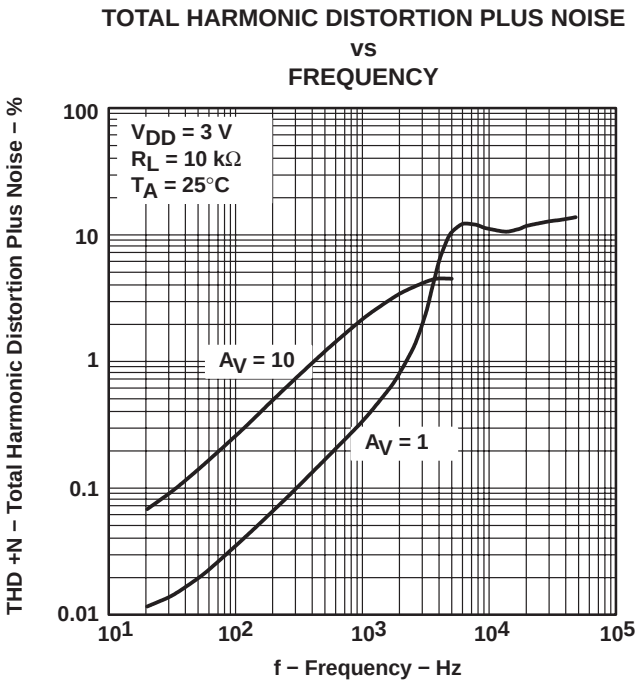

Figure 44

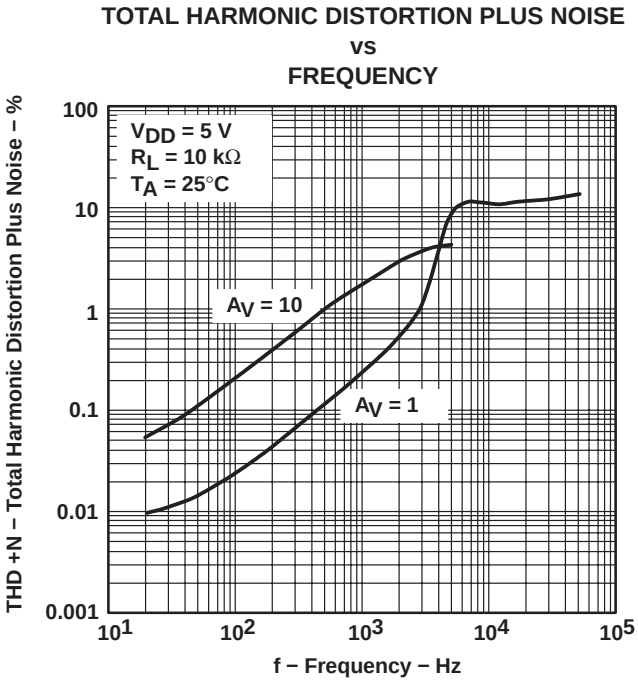

Figure 45

TYPICAL CHARACTERISTICS

GAIN-BANDWIDTH PRODUCT vs SUPPLY VOLTAGE

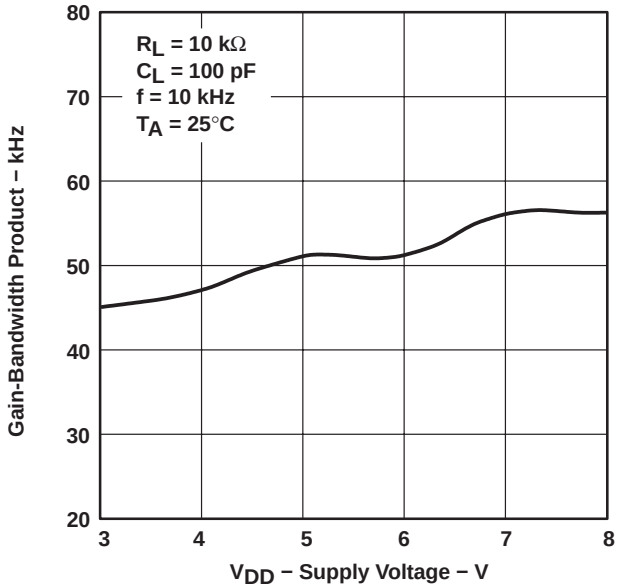

Figure 46

GAIN-BANDWIDTH PRODUCT vs FREE-AIR TEMPERATURE

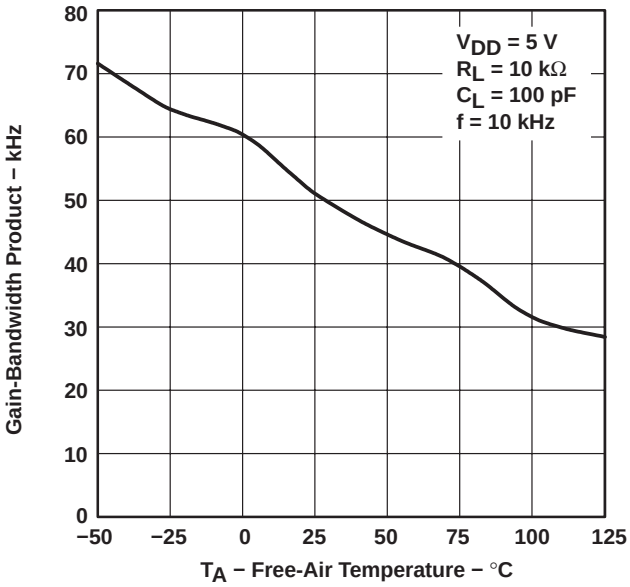

Figure 47

PHASE MARGIN vs LOAD CAPACITANCE

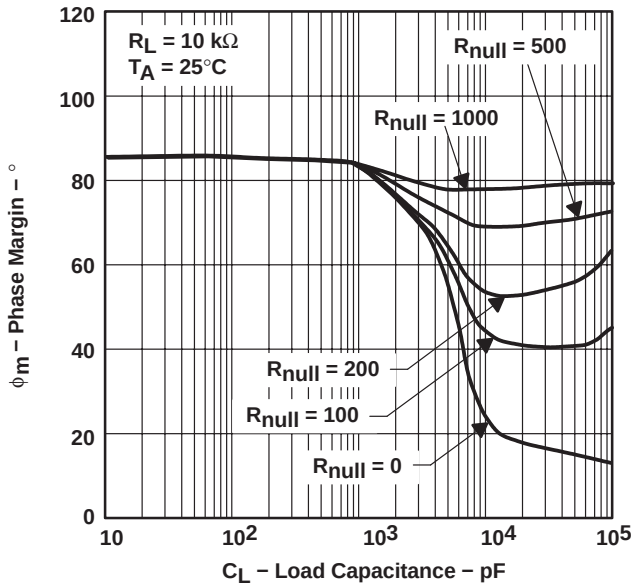

Figure 48

GAIN MARGIN vs LOAD CAPACITANCE

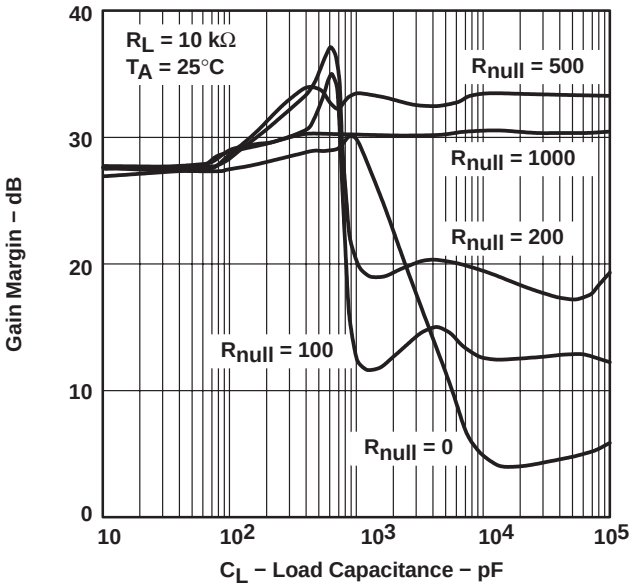

Figure 49

TYPICAL CHARACTERISTICS

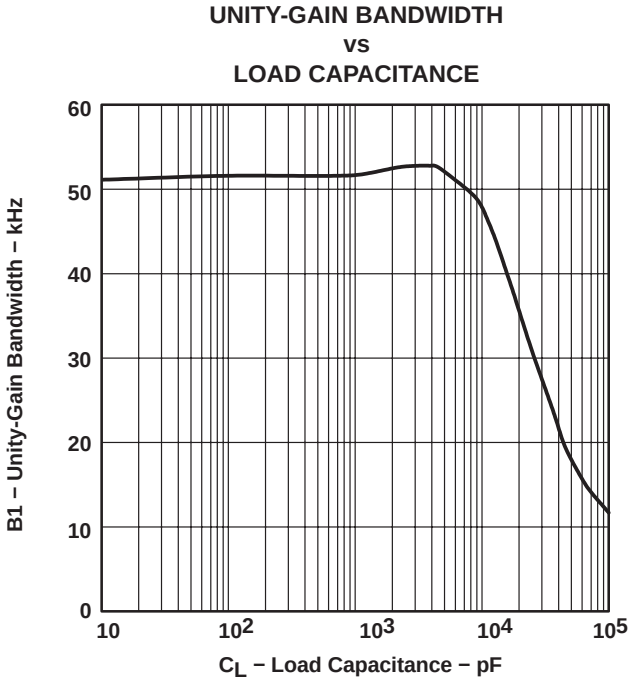

Figure 50

PACKAGING INFORMATION

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead/Ball Finish	MSL Peak Temp (3)	Op Temp (°C)	Top-Side Markings (4)	Samples
TLV2422AQDRG4Q1	ACTIVE	SOIC	D	8	2500	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 125	2422AQ	Samples
TLV2422AQDRQ1	OBSOLETE	SOIC	D	8		TBD	Call TI	Call TI	-40 to 125	2422AQ	
TLV2422QDRG4Q1	ACTIVE	SOIC	D	8	2500	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 125	2422Q1	Samples

(1) The marketing status values are defined as follows:
ACTIVE: Product device recommended for new designs.
LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.
NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.
PREVIEW: Device has been announced but is not in production. Samples may or may not be available.
OBSOLETE: TI has discontinued the production of the device.

(2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check http://www.ti.com/productcontent for the latest availability information and additional product content details.
TBD: The Pb-Free/Green conversion plan has not been defined.
Pb-Free (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.
Pb-Free (RoHS Exempt): This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.
Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

(3) MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) Multiple Top-Side Markings will be inside parentheses. Only one Top-Side Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Top-Side Marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

OTHER QUALIFIED VERSIONS OF TLV2422-Q1, TLV2422A-Q1 :

- Catalog: TLV2422, TLV2422A
- Military: TLV2422M, TLV2422AM

NOTE: Qualified Version Definitions:

- Catalog - TI's standard catalog product
- Military - QML certified for Military and Defense Applications

D (R–PDSO–G8) PLASTIC SMALL OUTLINE

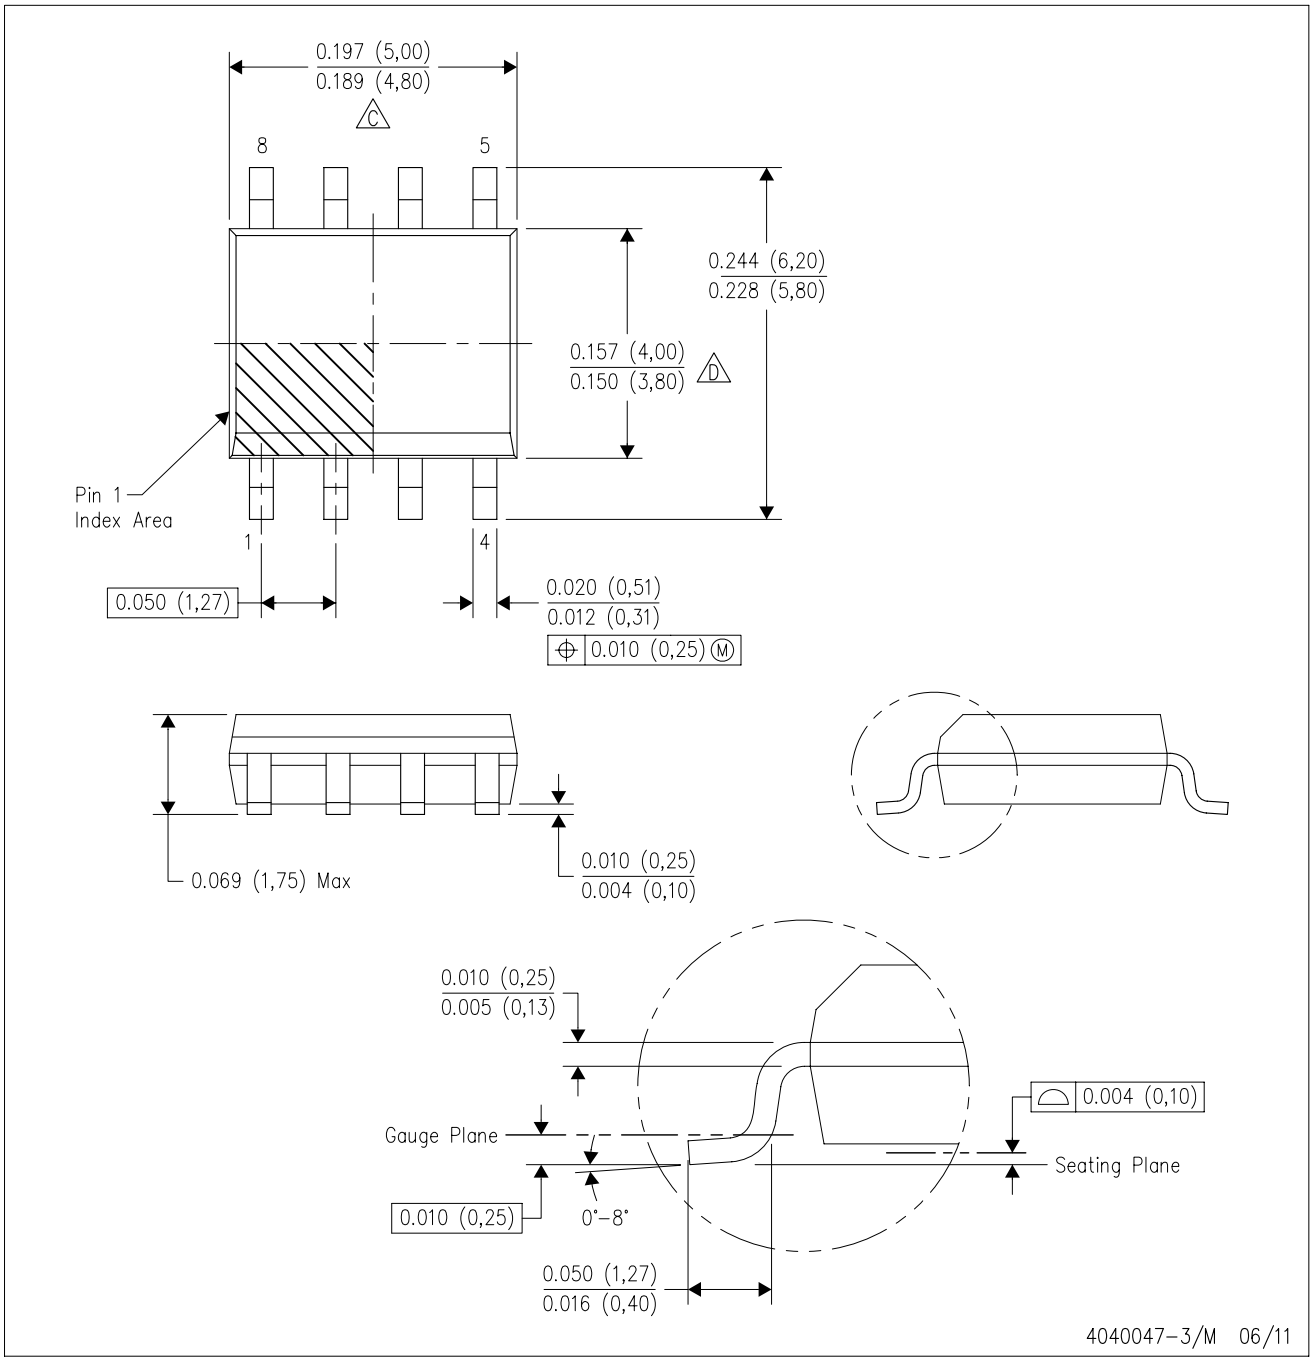

NOTES:
A. All linear dimensions are in inches (millimeters).
B. This drawing is subject to change without notice.
C. Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.006 (0,15) each side.
D. Body width does not include interlead flash. Interlead flash shall not exceed 0.017 (0,43) each side.
E. Reference JEDEC MS–012 variation AA.

D (R–PDSO–G8) PLASTIC SMALL OUTLINE

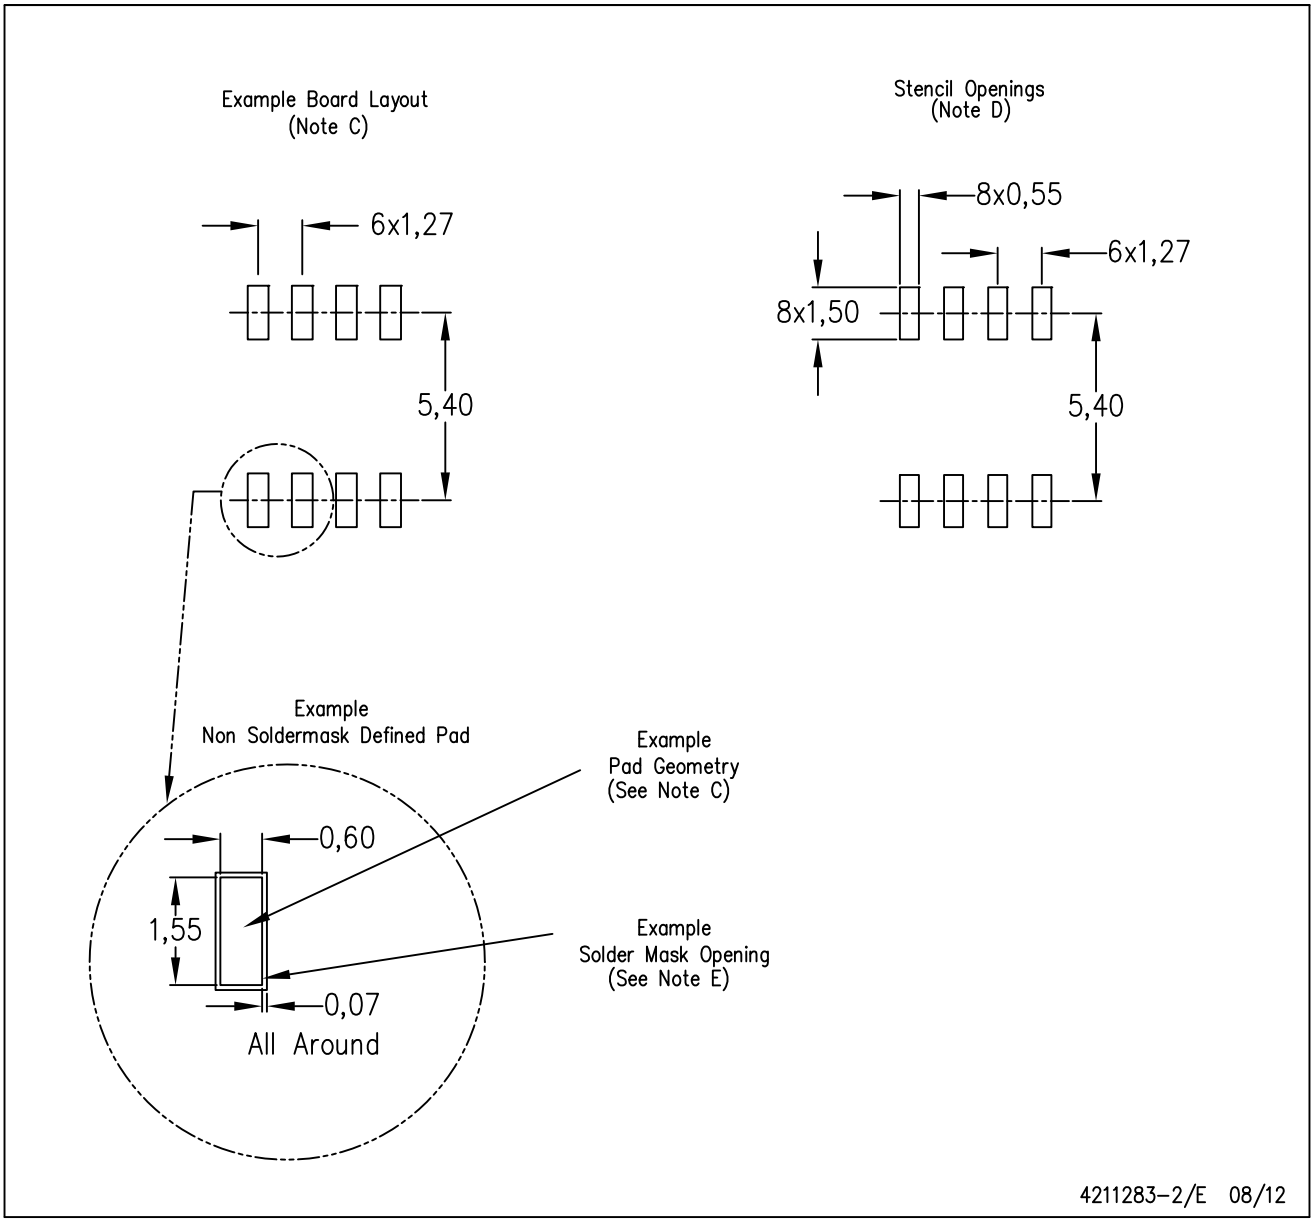

NOTES:
A. All linear dimensions are in millimeters.
B. This drawing is subject to change without notice.
C. Publication IPC–7351 is recommended for alternate designs.
D. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC–7525 for other stencil recommendations.
E. Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as “components”) are sold subject to TI’s terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI’s terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers’ products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers’ products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI’s goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or “enhanced plastic” are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have ***not*** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

Products		**Applications**	
Audio	www.ti.com/audio	Automotive and Transportation	www.ti.com/automotive
Amplifiers	amplifier.ti.com	Communications and Telecom	www.ti.com/communications
Data Converters	dataconverter.ti.com	Computers and Peripherals	www.ti.com/computers
DLP® Products	www.dlp.com	Consumer Electronics	www.ti.com/consumer-apps
DSP	dsp.ti.com	Energy and Lighting	www.ti.com/energy
Clocks and Timers	www.ti.com/clocks	Industrial	www.ti.com/industrial
Interface	interface.ti.com	Medical	www.ti.com/medical
Logic	logic.ti.com	Security	www.ti.com/security
Power Mgmt	power.ti.com	Space, Avionics and Defense	www.ti.com/space-avionics-defense
Microcontrollers	microcontroller.ti.com	Video and Imaging	www.ti.com/video
RFID	www.ti-rfid.com		
OMAP Applications Processors	www.ti.com/omap	**TI E2E Community**	e2e.ti.com
Wireless Connectivity	www.ti.com/wirelessconnectivity		

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2013, Texas Instruments Incorporated