

SECURITY LIGHTING

MULTI-SENSOR SWITCH AND DETECTOR




Cat. No. SL055

A multi-sensor indoor switch and 180° PIR sensor detector providing control of outdoor lighting in either 1 or 2 zones. The wall switch is designed for internal siting on new or existing installations and works in conjunction with low voltage SL099 sensor detectors mounted externally. Each zone is fully independent and can control up to 4 sensor detectors and 1500W (max) of normal external lighting in each zone. Simple slide switch controls allow automatic passive infra-red security or manual ON/OFF operations in both or individual zones and an audible alarm (optional setting) with a different tone for each zone sounds on detection. Light on times are adjustable from 5 seconds to 5 minutes in each zone and a light level control allows dusk till dawn or daylight operation.

A SL099 2 wire connection low voltage sensor detector is supplied with an adjustable 15 metre detection range and a 180° detection area. Additional sensor detectors are available.

FEATURES • 1 or 2 zone security lighting system • Converts new or existing external lighting • Indoor ON/OFF/AUTO switch with audible alarms for each zone • IP54 weatherproof low voltage 180° PIR detector • Controls up to 3000W (max) of lighting – 1500W (max) in each zone.

**SUITABLE FOR
FLUORESCENT
LIGHTING & LOW
ENERGY BULBS UP
TO 500W (MAX) IN
EACH ZONE**

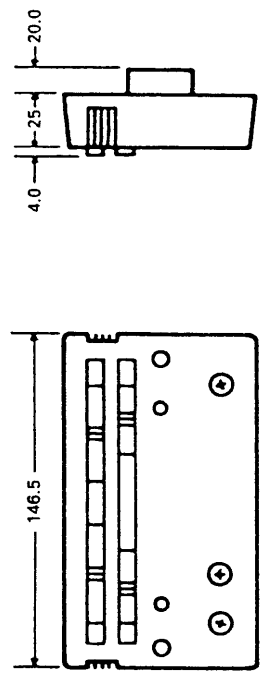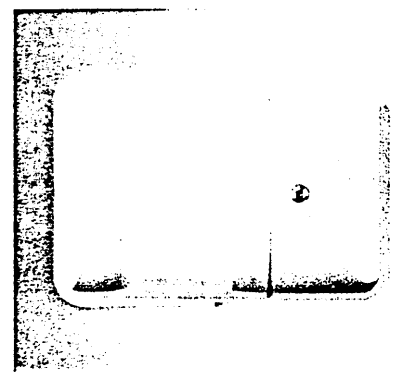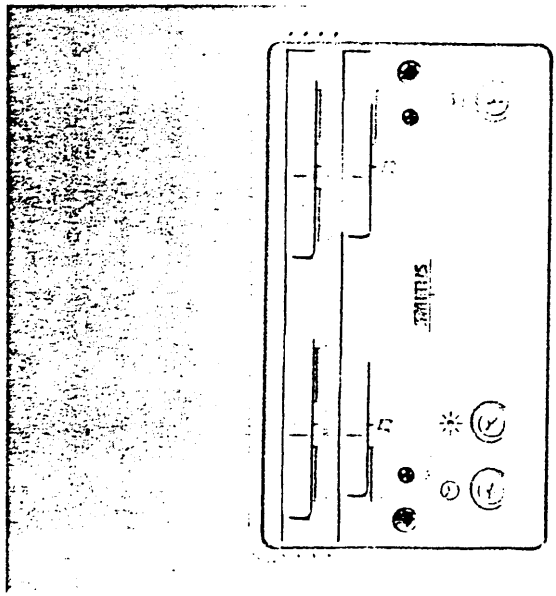

551-466