

RED INDICATES ORIGINAL


DASH NO	CABLES ACCOMMODATED	A DIM	B HEX	ASSEMBLE PER
-201	M17/176-00002	1.164	.255	TAI-143
-202	TWC-78-1			
-203	TWC-124-1A			
-204	10602, RAYCHEM			
-205	TWAC-78-1F2			
-206	792800130, RAYCHEM	1.289	.344	TAI-167
-207	83310 BELDEN			
-208	202-3927 MICRODDOT			
-209	202-3942 MICRODDOT			
-210	B451 BELDEN			
-211	202-3934 MICRODDOT	1.164	.255	TAI-143
-212	2524E0114, RAYCHEM			
-213	TWC-78-2			
-214	TWC-124-2			
-215	BL-982 TIMES			
-216	BL-1242 TIMES	1.289	.344	TAI-144
-217	GCB75TM24H, GRUMMAN			
-218	EPD 221888, RAYCHEM			
-219	252601114, RAYCHEM			
-220	GCB75RR1, GRUMMAN			
-221	10614, RAYCHEM	1.164	.255	TAI-143
-222	10613, RAYCHEM			
-223	HMS2-1149, HUGHES			
-224	TWCP-124-3			
-225	PS685PL, PRIME STOCK			

DATA CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO TROMPETER ELECTRONICS, INC. AND SHALL NOT BE DISCLOSED, COPIED OR USED FOR PRODUCTION OR MANUFACTURE WITHOUT EXPRESS WRITTEN PERMISSION.

REVISONS			3-0233	SH 1	
REV	EO	DESCRIPTION	DWN	APPROVED	DATE
K	12390	ADDED -224, & -225; SEE ECD	DBN	AM AM	5/8/98

DASH NO	CABLES ACCOMMODATED	A DIM	B HEX	ASSEMBLE PER
-301	GCB75GC1, GRUMMAN	1.164	.255	TAI-157
-302	GC875GB1, GRUMMAN S022E5111, RAYCHEM			
-303	7528A5314, RAYCHEM			
-304				
-305	M17/177-00001/295-3804 MICRODDOT	1.289	.344	TAI-173
-306	TRC-50-2 M17/134-00002			
-307	TRC-75-1			
-308	TRC-75-2			
-309	TRC-50-1	1.164	.255	TAI-157

INCH	MM
.005	0.13
.030	0.76
.125	3.18
.187	4.75
.190	4.83
.255	6.48
.344	8.74
.439	11.15
.443	11.25
.500	12.70
.590	14.99
.600	15.24
1.00	25.40
1.164	29.57
1.25	31.75
1.289	32.74
1.75	44.45

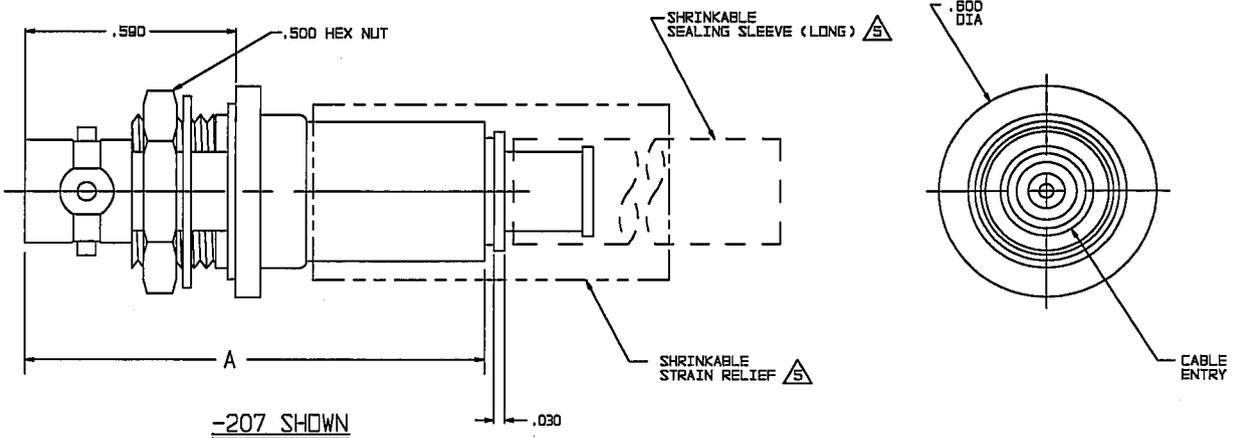

- 1 SHRINKABLE STRAIN RELIEF AND/OR SHRINKABLE SEALING SLEEVE SUPPLIED LOOSE AS FOLLOWS:
- CABLE GROUPS -207, -210 & -307:
 - 1 SHRINKABLE STRAIN RELIEF (1.00 LONG)
 - 1 SHRINKABLE SEALING SLEEVE (1.25 LONG)
 - CABLE GROUPS -201 THROUGH -206, -208, -209, -217 THROUGH -223, -301, -302, -303 & -309:
 - 1 SHRINKABLE SEALING SLEEVE (1.25 LONG)
 - CABLE GROUPS -211 THROUGH -216, -305, -306 & -308:
 - 1 SHRINKABLE STRAIN RELIEF (1.75 LONG)
4. MAX PANEL THK .125
3. 4-LUG SUBMINIATURE CONCENTRIC TWINAX, (4 PIECE ASSY) AND TRIAX (6 PIECE ASSY) FULL CRIMP INSULATED BULKHEAD MOUNT RECEPTACLE
2. FINISH: TFS-1A (NICKEL)
1. ALL DIMENSIONS ARE IN INCHES


-207 SHOWN

7. EXAMPLE OF COMPLETE MODEL NO:
 B J 1 5 9 A C F L - 2 0 1

BASIC MODEL NO _____ CABLE GROUP DASH NO _____

6. EXAMPLE OF COMPLETE PART NO.
 3-0233 -201

BASIC PART NO _____ CABLE GROUP DASH NO _____



RECOMMENDED
 PANEL CUTOUT
 SCALE: NONE



QTY	DESCRIPTION	PART NUMBER	ITEM
TOL. UNLESS SPECIFIED .XX ±.03 .XXX ±.005 .XXXX ±.0002 ANGLES:	TROMPETER ELECTRONICS, INC.	B J 1 5 9 A C F L	
DWN DBN 3/25/98	MATERIAL	CODE IDENT	DRAWING NO.
CHK 12-1 4-17-98		14949	3-0233
ENGR			REV K
APPR 1/8M 5/8/98	SCALE 4/1	DATE 5-31-85	SHEET 1 OF 2

NEXT ASSY