


TROMPETER SPECIFICATION SHEET
CABLE, RADIO FREQUENCY, TRIAXIAL

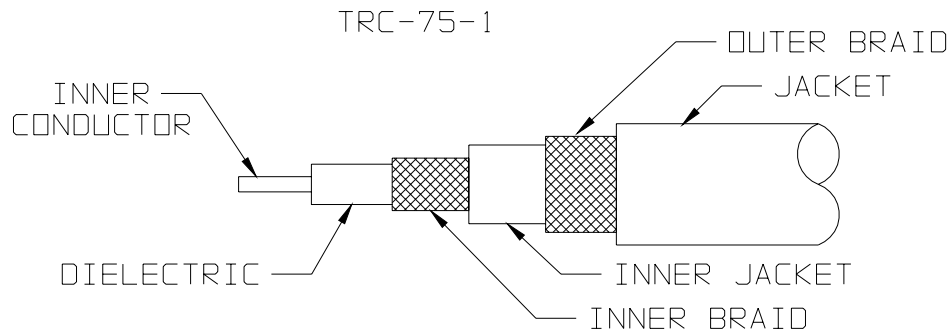

REQUIREMENTS:

1. IMPEDANCE - - - - - 75 $\pm$ 5 ohms
2. OPERATING VOLTAGE - - - - - 1000 VRMS/2000 VDC
3. BEND RADIUS - - - - - 1 INCH MIN
4. CAPACITANCE - - - - - 20 pf/FT NOM
5. VELOCITY OF PROPAGATION - - - - - 66% NOM

6. ATTENUATION:	FREQUENCY	dB/100 FT NOM	FREQUENCY	dB/100 FT NOM
	1 MHz	0.90	40 MHz	5.40
	3 MHz	1.30	50 MHz	6.10
	4 MHz	1.50	100 MHz	9.70
	5 MHz	1.70	200 MHz	16.50
	7 MHz	1.90	500 MHz	28.50
	10 MHz	2.40	700 MHz	36.00
	20 MHz	3.60	1000 MHz	45.00
	30 MHz	4.50		

7. INNER CONDUCTOR DC RESISTANCE - - - 112.3 ohms/1000 FT
8. OPERATING TEMPERATURE RANGE -40°C TO +80°C
9. WEIGHT - - - - - 24.8 LB/1000 FT
10. MARK: TROMPETER ELECTRONICS TRIAX, TRC-75-1 (*)

(*) VENDOR I.D. CODE

TABLE 1

DESCRIPTION	CONSTRUCTION DETAILS
INNER CONDUCTOR	7 STRANDS OF AWG SIZE 38 TINNED COPPER WIRE. NOM O.D. .012
DIELECTRIC	SOLID CLEAR POLYETHYLENE .073 $\pm$.003 O.D.
INNER BRAID	SINGLE BRAID, AWG SIZE 38 TINNED COPPER WIRE. SHIELD COVERAGE 93% MIN. NOM O.D. .0935
INNER JACKET	CLEAR POLYETHYLENE .130 $\pm$.005 O.D.
OUTER BRAID	SINGLE BRAID, AWG SIZE 38 TINNED COPPER WIRE. SHIELD COVERAGE 93% MIN. NOM O.D. .150
JACKET	YELLOW POLYVINYLCHLORIDE. OUTSIDE DIA .189 $\pm$.005