


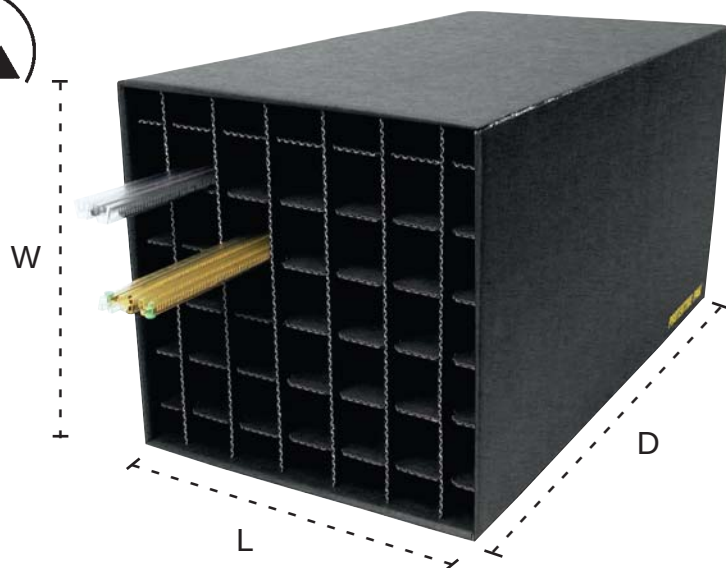

Made in America

Features

- Economical and efficient way to store and transport DIP Tubes and Rails
- Each cell has an extender tab which may be labeled to identify the contents
- Tube Handler may be rotated on shelves to view the extender tab either vertically or horizontally
- Cell identification labels included
- Shipped knocked-down; easy to assemble
- Made in America

RoHS Compliance Statement

None of the following materials are intentionally added in manufacturing this product: lead, mercury, cadmium, hexavalent chromium, polybrominated biphenyls (PBB) or polybrominated diphenyl ethers (PBDE) as outlined in the Directive 2002/95/EC Article 4.1. See Protektive Pak Inc. letter on-line at ProtektivePak.com.

**See reverse side
for available sizes.**

SPECIFICATIONS

Properties

Electrostatic Decay

Surface Resistance

Surface Resistance, Low R.H. Cut-off

High-Voltage Discharge Resistance

Static Shielding

Charged Device Model (CDM) Safety

Current-Carrying Hazard

Corrosivity

Antistat Transfer

Water & Isopropyl Alcohol Extraction

Tests for Antistat Permanence

Sloughing Test

Recyclability

Biodegradability

Volume Conductivity

Shelf Life

Typical Values

0.01 seconds at 72°F and 11.8% R.H.

10E6 - 10E8 ohms/sq. after 11 days at 68°F and 12% R.H. for surface. 10E3 - 10E4 ohms/sq. for buried shielding layer

4% R.H.

Failure rate 0/5 (no oxide damage in five consecutive tests)

99.9% attenuation at 10kV; 99.6% attenuation at 30kV

RTG >10E7 ohms at 86% R.H. or less

10E3 mA at 110V; 10E3 mA at 220V

Contains 1-3 ppm reducible sulfur

No transfer

Surface resistance 10E8 - 10E9 ohms/square at 74°F and 36% R.H.

Negligible surface damage at 10 cycles and <5% of surface damage at 200 cycles in Taber Abrasion Test. No conductive particles abraded from surface

Complete recyclability of package

Biodegradation in or on moist soil

Conductivity from wall to wall as well as across surface to assure permanence of the antistatic property

Indefinite

Test Procedures/Method

FED-STD-101, Method 4046

ASTM D257

Rockwell International Test Report of December 20, 1991

Rockwell International Test Report of December 20, 1991

EIA 541, appendix E, capacitive probe test

Rockwell International Test Report of December 20, 1991

ESD from A to Z

FED-STD-101, Method 3005 for reducible sulfur

Rockwell International Test Report of January 8, 1992

Rockwell International Test Report of January 8, 1992

ASTM D4060 at 70 rpm with CS-17 abrasive-coated wheels and 1000 grams load

Rockwell International Test Report of January 8, 1992

Rockwell International Test Report of January 8, 1992

Rockwell International Test Report of January 8, 1992

TUBE HANDLERS

PROTEKTIVE PAK
BURIED SHIELDING LAYER

PROTEKTIVE PAK
13520 MONTE VISTA AVENUE, CHINO, CA 91710
PHONE (909) 627-2578, FAX (909) 363-7331
ProtektivePak.com

DRAWING NUMBER
37790

DATE:
September
2007

Item No.	O.D. L x W x D	Cell I.D. L x W x D	# of Cells
37790	12 x 6 x 20	1-7/8 x 1-7/8 x 20	10
37791	12 x 6 x 24	1-7/8 x 1-7/8 x 24	10
37792	12 x 12 x 20	1-7/8 x 1-7/8 x 20	25
37793	12 x 12 x 24	1-7/8 x 1-7/8 x 24	25
37794	24 x 12 x 20	1-7/8 x 1-7/8 x 20	50
37795	24 x 12 x 24	1-7/8 x 1-7/8 x 24	50