


*The Reliable Source ...*

# FERROPERM



*for High Quality*

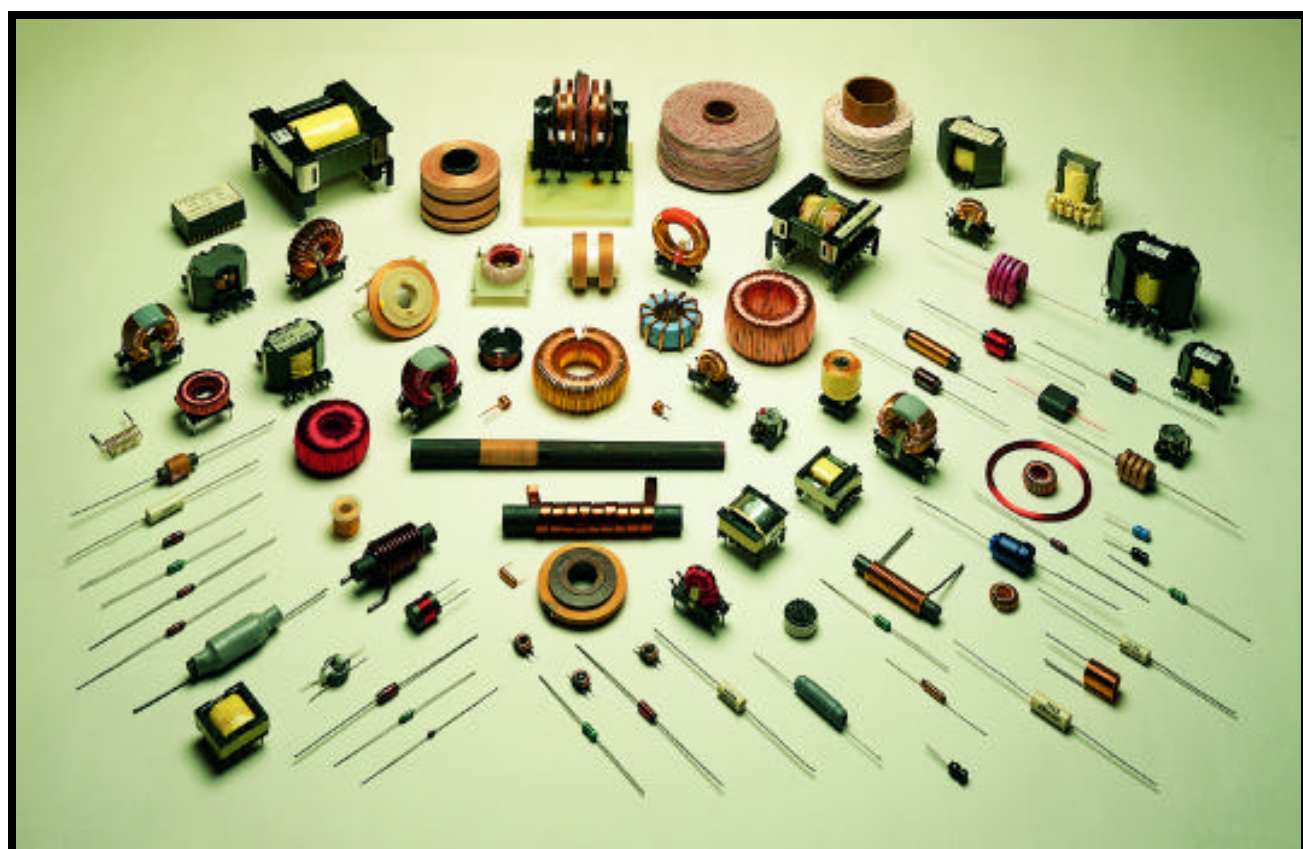

*Inductors and*



*Transformers*

## **INDUCTORS AND TRANSFORMERS**

**from FERROPERM UK Ltd.**

FERROPERM offers a manufacturing capability for the production of most types of high quality inductors and transformers, including surface mounting types. Toroidal types and wave-wound types are particular specialities.

Transformers are all produced as custom designs (see page 16). Inductors are produced as custom designs (see page 15) and in standard ranges which are presented in this catalogue.

A highly flexible production facility ensures short lead times on custom designs as well as standard products. We can produce designs for your applications or we can manufacture to your own designs.


Rather than trying to list all the types of inductors and transformers FERROPERM can produce, it is easier to list types not made:

1. ``Mains" (50 or 60Hz) power transformers.
2. Inductors and transformers with any dimension larger than about 300 mm.

**FERROPERM**

## TYPE 1580

### RADIO-FREQUENCY CHOKES

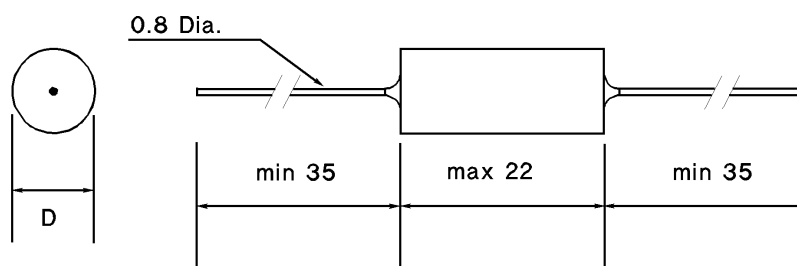

Dimensions in mm.

Core ..... Low-loss Iron Powder  
 Coating ..... Insulated with heat-shrink tube  
 Load on Terminals ..... 2Kg max  
 Working Temperature ..... -55 to +85°C ambient  
 Marking ..... Type and inductance

| Inductance<br>μH (±10%) | Maximum Rdc Ω |        | Idc A | Fr MHz | D mm |
|-------------------------|---------------|--------|-------|--------|------|
|                         | @ 25°C        | @ 85°C | Max   | Typ    | Max  |
| 10 *                    | 0.3           | 0.4    | 0.9   | 36.0   | 8.0  |
| 16                      | 0.7           | 0.9    | 0.6   | 32.0   | 8.0  |
| 25 *                    | 0.9           | 1.1    | 0.6   | 27.0   | 8.0  |
| 40                      | 1.3           | 1.7    | 0.5   | 18.0   | 8.0  |
| 50                      | 1.6           | 2.0    | 0.5   | 16.0   | 8.0  |
| 63                      | 1.7           | 2.2    | 0.5   | 14.0   | 8.5  |
| 80                      | 1.9           | 2.4    | 0.4   | 13.0   | 8.5  |
| 100 *                   | 2.0           | 2.6    | 0.4   | 10.0   | 8.5  |
| 125                     | 2.3           | 2.9    | 0.4   | 10.0   | 8.5  |
| 160                     | 2.6           | 3.3    | 0.4   | 9.0    | 9.0  |
| 200                     | 3.0           | 3.8    | 0.3   | 8.0    | 9.0  |
| 250 *                   | 3.4           | 4.3    | 0.3   | 7.0    | 9.0  |
| 315                     | 3.9           | 4.9    | 0.3   | 5.5    | 9.0  |
| 400                     | 4.5           | 5.6    | 0.2   | 5.0    | 9.0  |
| 500 *                   | 5.2           | 6.5    | 0.2   | 5.5    | 9.0  |

\* Preferred values

Idc max: Maximum Current at 85°C ambient

For other temperatures use the "Load Ratings" curve 1 on page 17

To order these chokes please specify type 1580 and the inductance value.

## FERROPERM

## RADIO-FREQUENCY CHOKES




| Inductance<br>μH (±10%) | Rdc Ω<br>Typ | Maximum Idc A |       | Fr MHz | Maximum D mm |       |
|-------------------------|--------------|---------------|-------|--------|--------------|-------|
|                         |              | 1580          | 1580K | Typ    | 1580         | 1580K |
| 1.0                     | 11           | 0.22          | 0.16  | 3.3    | 8.5          | 10.0  |
| 2.5                     | 19           | 0.16          | 0.12  | 2.0    | 10.0         | 11.5  |
| 5.0                     | 32           | 0.12          | 0.09  | 1.4    | 11.0         | 12.5  |
| 10.0                    | 47           | 0.12          | 0.09  | 1.0    | 14.0         | 16.0  |

To order these chokes please specify the type number and the inductance value.

# FERROPERM

# TYPE 1582

## RADIO-FREQUENCY CHOKES

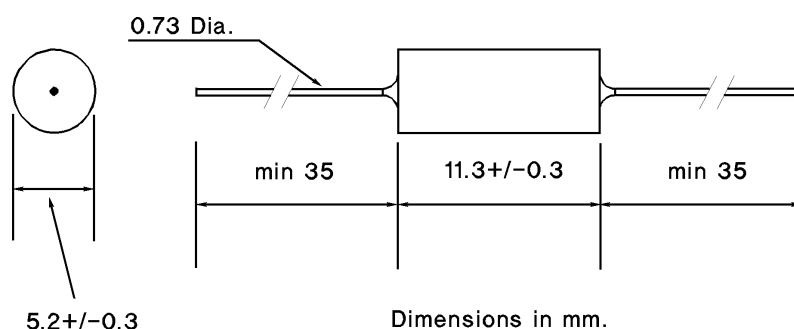

Core ..... Thermoset Plastic up to 0.68μH  
 Low-loss Ferrite above 0.68μH  
 Coating ..... Moulded Polypropylene  
 Load on Terminals ..... 2Kg max  
 Working Temperature ..... -55 to +85°C ambient  
 Marking ..... Type, inductance and current

| Inductance<br>μH (±10%) | Q   |            | Fr MHz | Rdc Ω | Idc A |
|-------------------------|-----|------------|--------|-------|-------|
|                         | Typ | @<br>F MHz |        |       |       |
| 0.10                    | 65  | 25         | >400   | 0.025 | 3.0   |
| 0.15                    | 65  | 25         | >400   | 0.035 | 2.5   |
| 0.22                    | 55  | 25         | >400   | 0.045 | 2.0   |
| 0.33                    | 55  | 25         | 350    | 0.055 | 2.0   |
| 0.47                    | 55  | 25         | 320    | 0.07  | 1.7   |
| 0.68                    | 45  | 15         | 290    | 0.09  | 1.5   |
| 1.0                     | 45  | 15         | 190    | 0.04  | 2.2   |
| 1.5                     | 65  | 8.0        | 155    | 0.05  | 2.0   |
| 2.2                     | 60  | 8.0        | 130    | 0.06  | 1.8   |
| 3.3                     | 50  | 8.0        | 110    | 0.07  | 1.7   |
| 4.7                     | 50  | 8.0        | 95     | 0.12  | 1.3   |
| 6.8                     | 60  | 8.0        | 85     | 0.22  | 1.0   |
| 10                      | 50  | 8.0        | 65     | 0.35  | 0.75  |
| 15                      | 55  | 2.5        | 55     | 0.6   | 0.6   |
| 22                      | 65  | 2.5        | 45     | 1.1   | 0.43  |
| 33                      | 85  | 2.5        | 35     | 2.0   | 0.3   |
| 47                      | 70  | 2.5        | 20     | 2.5   | 0.27  |
| 68                      | 65  | 2.5        | 16     | 3.0   | 0.25  |
| 100                     | 65  | 1.5        | 14     | 4.0   | 0.22  |
| 150                     | 80  | 0.8        | 9.5    | 5.8   | 0.23  |
| 220                     | 80  | 0.8        | 8.0    | 7.3   | 0.2   |
| 330                     | 80  | 0.8        | 9.5    | 12    | 1.16  |
| 470                     | 80  | 0.8        | 6.5    | 20    | 0.12  |
| 680                     | 85  | 0.8        | 5.0    | 24    | 0.11  |
| 1000                    | 85  | 0.8        | 3.0    | 30    | 0.1   |

Idc max: Maximum Current at 85°C ambient


For other temperatures use the "Load Ratings" curve 2 on page 17

To order these chokes please specify type 1582 and the inductance value.

# FERROPERM

## TYPE 1583

### RADIO-FREQUENCY CHOKES

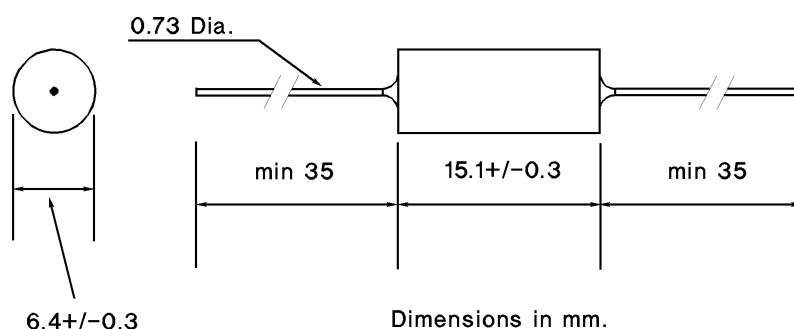

Core ..... Low-loss Ferrite  
 Coating ..... Moulded Polypropylene  
 Load on Terminals ..... 2Kg max  
 Working Temperature ..... -55 to +85°C ambient  
 Marking ..... Type, inductance and current

| Inductance<br>μH (±10%) | Q @ |       | Fr MHz | Rdc Ω | Idc A |
|-------------------------|-----|-------|--------|-------|-------|
|                         | Typ | F MHz | Typ    | Typ   | Max   |
| 1.0                     | 90  | 8.0   | 200    | 0.015 | 3.0   |
| 1.5                     | 85  | 8.0   | 160    | 0.02  | 3.0   |
| 2.2                     | 75  | 8.0   | 140    | 0.025 | 3.0   |
| 3.3                     | 55  | 8.0   | 120    | 0.035 | 3.0   |
| 4.7                     | 40  | 8.0   | 100    | 0.04  | 2.7   |
| 6.8                     | 40  | 8.0   | 85     | 0.07  | 2.0   |
| 10                      | 50  | 8.0   | 70     | 0.16  | 1.25  |
| 15                      | 50  | 2.5   | 55     | 0.32  | 1.0   |
| 22                      | 50  | 2.5   | 45     | 0.54  | 0.75  |
| 33                      | 60  | 2.5   | 35     | 0.85  | 0.6   |
| 47                      | 80  | 2.5   | 32     | 1.5   | 0.45  |
| 68                      | 100 | 2.5   | 25     | 2.7   | 0.3   |
| 100                     | 60  | 0.8   | 15     | 1.8   | 0.4   |
| 150                     | 70  | 0.8   | 12     | 3.6   | 0.3   |
| 220                     | 70  | 0.8   | 11     | 4.3   | 0.25  |
| 330                     | 75  | 0.8   | 8      | 8.3   | 0.2   |
| 470                     | 80  | 0.8   | 8      | 10    | 0.17  |
| 680                     | 80  | 0.8   | 6      | 16    | 0.14  |
| 1000                    | 70  | 0.5   | 5      | 20    | 0.12  |

Idc max: Maximum Current at 85°C ambient


For other temperatures use the "Load Ratings" curve 2 on page 17

To order these chokes please specify type 1583 and the inductance value.

## FERROPERM

## TYPE 1585

### INTERFERENCE SUPPRESSION CHOKES

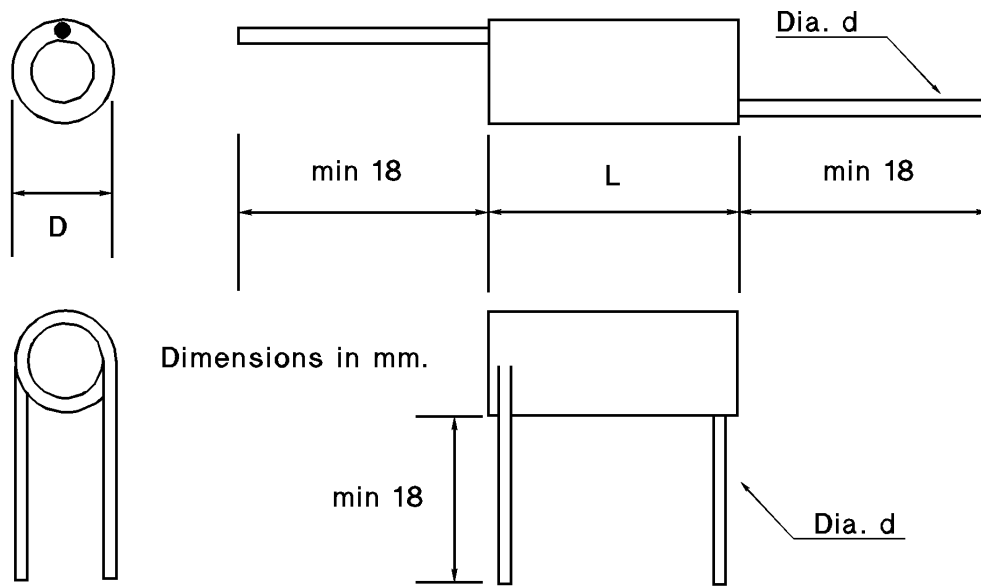

INS (insulated) types only have axial leads: see top drawing.

LAC (lacquered) types can have axial or radial leads:      see top drawing for axial style  
                                                                                                                  see bottom drawing for radial style

|                           |                                 |
|---------------------------|---------------------------------|
| Core .....                | Ferrite                         |
| Coating (LAC types) ..... | Polyurethane Lacquer            |
| Coating (INS types) ..... | Insulated with heat-shrink tube |
| Working Temperature ..... | -55 to +85°C ambient            |
| Marking (LAC types) ..... | None                            |
| Marking (INS types) ..... | Type, inductance and current    |

Idc max: Maximum Current at 85°C ambient

For other temperatures use the "Load Ratings" curves on page 17

Curve1forINStypesandCurve2forLACtypes

For dimensions see next page

To order these chokes please specify type 1585 and the inductance value, current rating and type.

e.g. "1585 10 $\mu$ H 3A LAC"      or      "1585 25 $\mu$ H 6A INS"

Axial leads will be supplied unless radial are specified. Radial are only available on LAC types.

## FERROPERM

## TYPE 1585

### INTERFERENCE SUPPRESSION CHOKES

| Inductance<br>$\mu\text{H}$ ( $\pm 20\%$ ) | Maximum Idc A |     | Rdc $\text{m}\Omega$ | Fr MHz | Dimensions in mm * |   |    |      |
|--------------------------------------------|---------------|-----|----------------------|--------|--------------------|---|----|------|
|                                            | LAC           | INS | Typ                  | Typ    | D                  | × | L  | d    |
| 4                                          | 2             | 1.5 | 35                   | 140    | 3                  | × | 11 | 0.35 |
| 6                                          |               |     | 38                   | 110    | 3                  | × | 15 | 0.4  |
| 10                                         |               |     | 43                   | 90     | 3                  | × | 30 | 0.4  |
| 15                                         |               |     | 70                   | 65     | 5                  | × | 20 | 0.4  |
| 25                                         |               |     | 110                  | 45     | 6                  | × | 20 | 0.35 |
| 4                                          | 3             | 2   | 18                   | 130    | 3                  | × | 15 | 0.5  |
| 6                                          |               |     | 20                   | 95     | 3                  | × | 20 | 0.5  |
| 10                                         |               |     | 38                   | 70     | 5                  | × | 20 | 0.5  |
| 15                                         |               |     | 50                   | 45     | 6                  | × | 20 | 0.5  |
| 25                                         |               |     | 68                   | 45     | 7                  | × | 22 | 0.5  |
| 4                                          | 4             | 3   | 13                   | 110    | 3.5                | × | 20 | 0.63 |
| 6                                          |               |     | 20                   | 90     | 5.5                | × | 20 | 0.63 |
| 10                                         |               |     | 25                   | 70     | 6.5                | × | 20 | 0.63 |
| 15                                         |               |     | 37                   | 55     | 7.5                | × | 22 | 0.63 |
| 25                                         |               |     | 45                   | 40     | 7.5                | × | 30 | 0.63 |
| 50                                         |               |     | 60                   | 3      | 10.5               | × | 22 | 0.63 |
| 100                                        |               |     | 90                   | 2.5    | 10.5               | × | 22 | 0.63 |
| 500                                        |               |     | 200                  | 1      | 14                 | × | 40 | 0.63 |
| 1000                                       |               |     | 350                  | 0.6    | 15.5               | × | 42 | 0.63 |
| 4                                          | 6             | 4   | 10                   | 100    | 6                  | × | 20 | 0.8  |
| 6                                          |               |     | 13                   | 80     | 7                  | × | 20 | 0.8  |
| 10                                         |               |     | 16                   | 70     | 8                  | × | 22 | 0.8  |
| 15                                         |               |     | 20                   | 55     | 8                  | × | 30 | 0.8  |
| 25                                         |               |     | 25                   | 45     | 8                  | × | 35 | 0.8  |
| 4                                          | 8             | 6   | 8                    | 110    | 7.5                | × | 20 | 0.95 |
| 6                                          |               |     | 9.5                  | 80     | 8.5                | × | 22 | 0.95 |
| 10                                         |               |     | 12                   | 65     | 8.5                | × | 30 | 0.95 |
| 15                                         |               |     | 15                   | 55     | 8.5                | × | 35 | 0.95 |
| 25                                         |               |     | 19                   | 45     | 8.5                | × | 40 | 0.95 |


\* D & L are maximum dimensions for LAC types. Please add 1mm to D and 5mm to L for maximum dimensions for INS types.

Dimension d values are nominal wire diameters.

## FERROPERM

# TYPE 15EC24

## GENERAL PURPOSE INDUCTORS

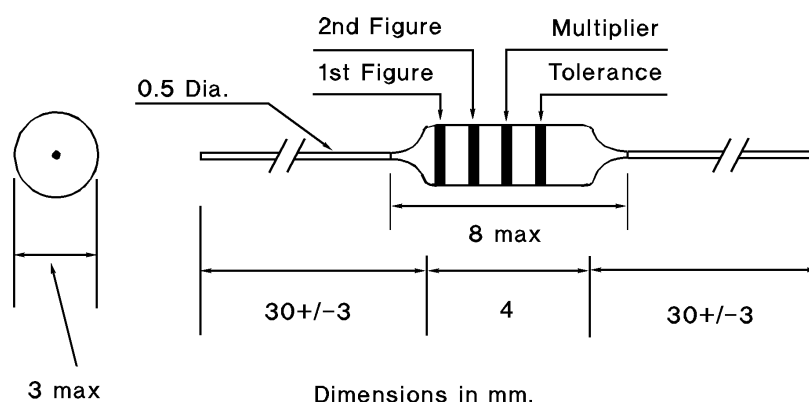

Core ..... Ferrite  
 Coating ..... Epoxy  
 Insulation withstand voltage ..... 250V a.c.  
 Load on Terminals ..... 1Kg max  
 Working Temperature ..... -55 to +85°C ambient  
 Marking ..... Standard colour banding  
 (Base unit 1μH)

| Inductance<br>μH | Q   | @     | Fr MHz | Rdc Ω | Idc mA |
|------------------|-----|-------|--------|-------|--------|
|                  | Min | F MHz | Min    | Max   | Max    |
| 0.22 ±20%        | 40  | 25.2  | 380    | 0.08  | 1150   |
| 0.47 ±20%        | 40  | 25.2  | 300    | 0.1   | 1000   |
| 1.0 ±10%         | 40  | 25.2  | 180    | 0.15  | 815    |
| 2.2 ±10%         | 50  | 7.96  | 110    | 0.25  | 630    |
| 4.7 ±10%         | 45  | 7.96  | 50     | 0.35  | 530    |
| 10 ±10%          | 40  | 7.96  | 22     | 0.72  | 370    |
| 22 ±10%          | 50  | 2.52  | 13     | 1.2   | 385    |
| 47 ±10%          | 60  | 2.52  | 8.5    | 2.3   | 205    |
| 100 ±10%         | 60  | 2.52  | 5.5    | 3.5   | 165    |
| 220 ±10%         | 60  | 0.796 | 4.0    | 5.7   | 130    |
| 470 ±10%         | 60  | 0.796 | 2.5    | 11.6  | 90     |
| 1000 ±10%        | 60  | 0.796 | 1.1    | 30    | 60     |

To order these chokes please specify type 15EC24 and the inductance value.

Certain other inductance values are available to special order. Please contact our Sales Office with your requirements.


Examples of colour banding:-

|             | 1st Fig | 2nd Fig | Multiplier | Tolerance |
|-------------|---------|---------|------------|-----------|
| 15EC24 u47M | Yellow  | Purple  | Silver     | Black     |
| 15EC24 m22K | Red     | Red     | Brown      | Silver    |

# FERROPERM

# TYPE 15EC36

## GENERAL PURPOSE INDUCTORS

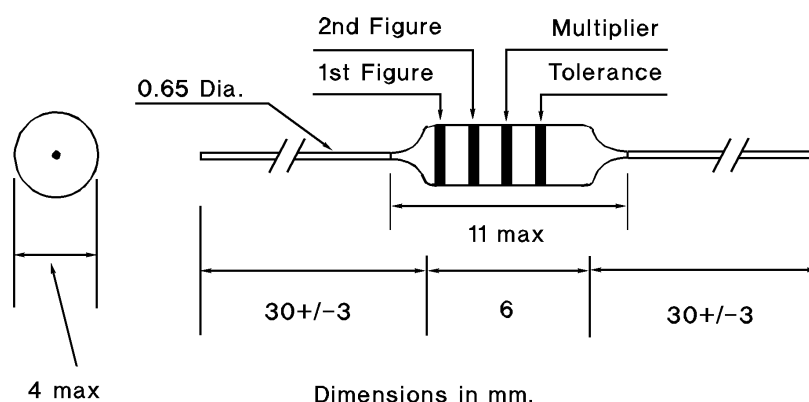

Core ..... Ferrite  
 Coating ..... Epoxy  
 Insulation withstand voltage ..... 250V a.c.  
 Load on Terminals ..... 1Kg max  
 Working Temperature ..... -55 to +85°C ambient  
 Marking ..... Standard colour banding  
 (Base unit 1μH)

| Inductance<br>μH | Q   | @     | Fr MHz | Rdc Ω | Idc mA |
|------------------|-----|-------|--------|-------|--------|
|                  | Min | F MHz | Min    | Max   | Max    |
| 0.22 ±20%        | 25  | 25.2  | 380    | 0.21  | 880    |
| 0.47 ±20%        | 25  | 25.2  | 250    | 0.36  | 650    |
| 1.0 ±10%         | 45  | 25.2  | 157    | 0.19  | 920    |
| 2.2 ±10%         | 55  | 7.96  | 110    | 0.28  | 750    |
| 4.7 ±10%         | 70  | 7.96  | 80     | 0.39  | 620    |
| 10 ±10%          | 85  | 7.96  | 45     | 0.58  | 500    |
| 22 ±10%          | 60  | 2.52  | 9.9    | 0.84  | 410    |
| 47 ±10%          | 45  | 2.52  | 6.3    | 1.22  | 340    |
| 100 ±10%         | 30  | 2.52  | 4.8    | 1.8   | 275    |
| 220 ±10%         | 70  | 0.796 | 3.0    | 5.1   | 155    |
| 470 ±10%         | 60  | 0.796 | 2.3    | 7.7   | 126    |
| 1000 ±10%        | 50  | 0.796 | 1.4    | 14    | 100    |

To order these chokes please specify type 15EC36 and the inductance value.

Certain other inductance values are available to special order. Please contact our Sales Office with your requirements.


Examples of colour banding:-

|             | 1st Fig | 2nd Fig | Multiplier | Tolerance |
|-------------|---------|---------|------------|-----------|
| 15EC36 u47M | Yellow  | Purple  | Silver     | Black     |
| 15EC35 m22K | Red     | Red     | Brown      | Silver    |

# FERROPERM

## TYPE 1588

### RADIO-FREQUENCY CHOKES

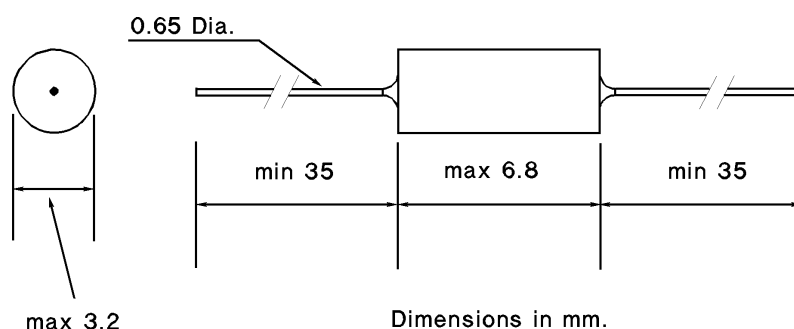

Core ..... Thermoset Plastic up to 1.0 $\mu$ H  
 Low-loss Ferrite above 1.0 $\mu$ H  
 Coating ..... Polyurethane Lacquer  
 Load on Terminals ..... 2Kg max  
 Working Temperature ..... -55 to +85°C ambient  
 Marking ..... Type and inductance

| Inductance<br>$\mu$ H ( $\pm 10\%$ ) | Q @ |       | Fr MHz | Rdc $\Omega$ | Idc A |
|--------------------------------------|-----|-------|--------|--------------|-------|
|                                      | Typ | F MHz | Typ    | Typ          | Max   |
| 0.1                                  | 50  | 25    | 680    | 0.1          | 1.3   |
| 0.15                                 | 50  | 25    | 600    | 0.13         | 1.1   |
| 0.22                                 | 50  | 25    | 510    | 0.16         | 1.0   |
| 0.33                                 | 50  | 25    | 410    | 0.18         | 0.9   |
| 0.47                                 | 50  | 25    | 330    | 0.28         | 0.8   |
| 0.68                                 | 50  | 25    | 280    | 0.3          | 0.75  |
| 1.0                                  | 50  | 25    | 250    | 0.42         | 0.65  |
| 1.5                                  | 70  | 8.0   | 150    | 0.25         | 0.8   |
| 2.2                                  | 70  | 8.0   | 125    | 0.3          | 0.75  |
| 3.3                                  | 60  | 8.0   | 100    | 0.35         | 0.7   |
| 4.7                                  | 65  | 8.0   | 85     | 0.5          | 0.6   |
| 6.8                                  | 70  | 8.0   | 70     | 1.1          | 0.4   |
| 10                                   | 70  | 8.0   | 60     | 1.8          | 0.3   |
| 15                                   | 60  | 2.5   | 45     | 2.6          | 0.25  |
| 22                                   | 50  | 2.5   | 35     | 5            | 0.18  |
| 33                                   | 60  | 2.5   | 25     | 6.2          | 0.16  |
| 47                                   | 65  | 2.5   | 21     | 7.5          | 0.15  |
| 68                                   | 70  | 2.5   | 17     | 8.5          | 0.14  |
| 100                                  | 70  | 2.5   | 13     | 11.5         | 0.12  |

Idc max: Maximum Current at 85°C ambient


For other temperatures use the "Load Ratings" curve 2 on page 17

To order these chokes please specify type 1588 and the inductance value.

## FERROPERM

## Type 1586

### INTERFERENCE SUPPRESSION CHOKES

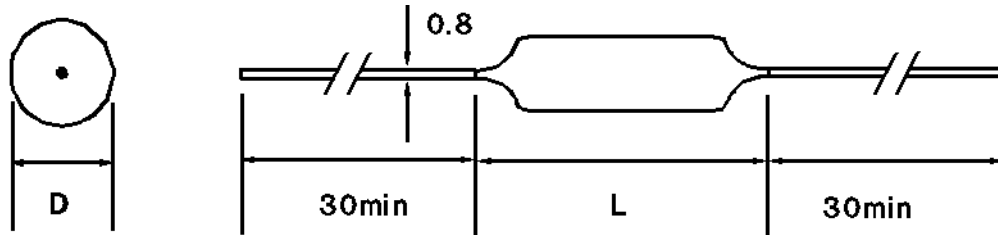

Dimensions in mm.

Core ..... Ferrite.  
 Coating ..... Insulated with heat-shrink tube.  
 Working Temperature ..... -55 to +85 °C ambient.  
 Marking ..... Type, inductance and current.

| Inductance<br>uH (±20%) | Idc max.<br>A | Rdc Typ.<br>milliOhms | Fr Typ.<br>MHz | Dimensions<br>D × L |
|-------------------------|---------------|-----------------------|----------------|---------------------|
| 5.6                     | 8             | 17                    | 83             | 8 × 26              |
| 10                      | 5             | 35                    | 65             | 7.5 × 26            |
| 15                      | 4             | 50                    | 55             | 7.3 × 26            |
| 33                      | 3.5           | 70                    | 7              | 11 × 26             |
| 68                      | 3             | 100                   | 5              | 11 × 26             |
| 100                     | 2.5           | 150                   | 3.5            | 10 × 26             |
| 150                     | 1.8           | 300                   | 2.5            | 9.8 × 26            |
| 330                     | 1.4           | 500                   | 2              | 11 × 26             |
| 680                     | 1             | 1000                  | 1.1            | 10 × 26             |
| 1000                    | 0.8           | 1500                  | 0.85           | 9.8 × 26            |
| 1500                    | 0.7           | 2000                  | 0.79           | 10.3 × 26           |
| 3300                    | 0.5           | 4000                  | 0.46           | 10.6 × 26           |
| 6800                    | 0.35          | 8000                  | 0.36           | 10.8 × 26           |
| 10000                   | 0.3           | 12000                 | 0.25           | 9.8 × 26            |

Imax: Maximum current at 40 °C ambient.

For other temperatures use the "Load Ratings" curve 3 shown on page 17.




To order these chokes please specify type 1586, the inductance value and the current rating. e.g. "1586 10μH 5A".

Dimension are in mm and are nominal values.

## FERROPERM

## Types 15SC137, 177, 178,

### COMMON MODE SUPPRESSION CHOKES

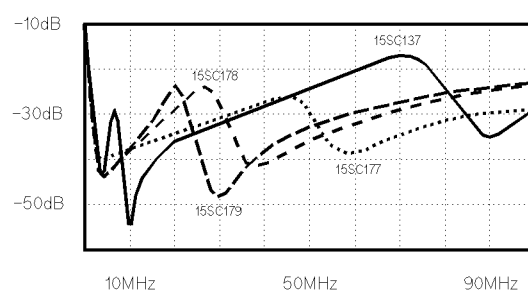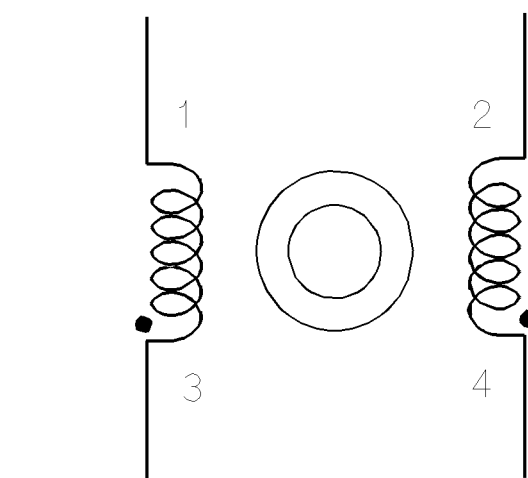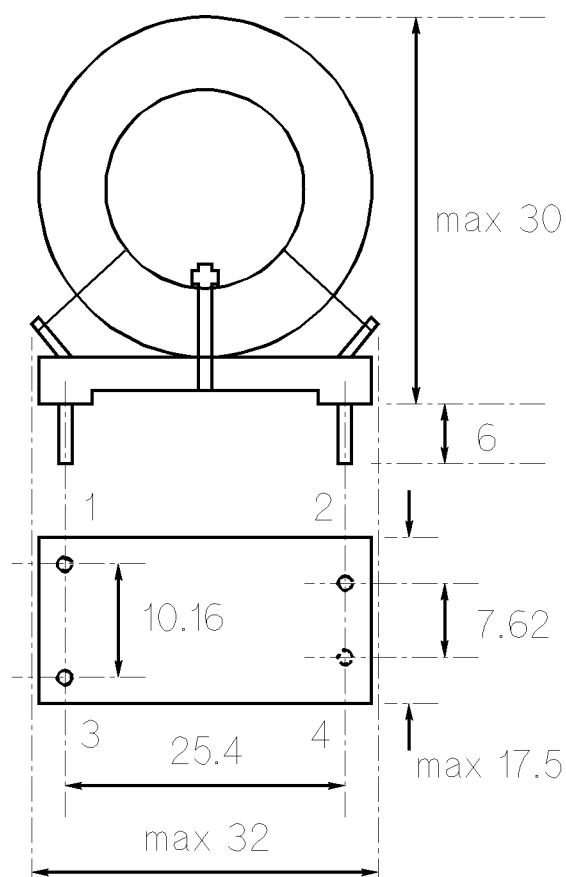

Typical Insertion loss v. Frequency (50 ohm system)

| Type Number | (min.) mH | I max *<br>A | Rdc Typ.<br>mOhms |
|-------------|-----------|--------------|-------------------|
| 15 SC 137   | 10        | 2            | 150               |
| 15 SC 177   | 2.2       | 4            | 44                |
| 15 SC 178   | 1.1       | 6            | 21                |
| 15 SC 179   | 0.6       | 8            | 11                |

|                                   |                  |
|-----------------------------------|------------------|
| Insertion Loss up to 50 MHz ..... | > 20 dB typical  |
| Insertion Loss up to 1 GHz .....  | > 10 dB typical  |
| Insulation Test .....             | 3kV dc.          |
| Core .....                        | Toroidal Ferrite |
| Working Temperature .....         | -55°C to +85°C   |

**Double Insulated  
common mode  
choke for  
interference  
suppression of  
incoming mains  
supplies.**

**These chokes are  
sometimes called  
current compen-  
sated chokes.**


To order these chokes please specify the type number.

\* For other temperatures use the "Load Ratings" curve 2 on page 17.

## FERROPERM

## Types 15SC 216, 217, 218, 219, 63, 108

### SINGLE LINE SUPPRESSION CHOKES

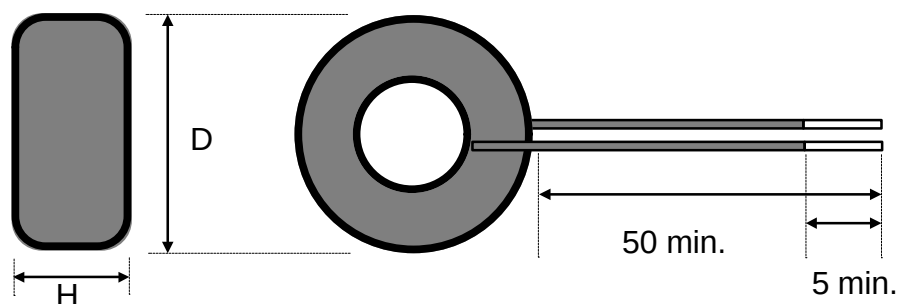

**Single line chokes for suppression in mains supply lines in equipment utilising SCRs or Triacs phase angle control applications. e.g. Light dimmers or motor speed controllers.**

Core ..... Iron Dust.  
 Terminations ..... Wire ended.  
 Working Temperature ..... -55 to +85 °C ambient.  
 Marking ..... None.

| Type number | Inductance<br>mH-20+80% | * I max.<br>A | Rdc Typ.<br>Ohms | Dimensions<br>D × H |
|-------------|-------------------------|---------------|------------------|---------------------|
| 15 SC 216   | 4                       | 0.4           | 1.8              | 20 × 8              |
| 15 SC 217   | 4                       | 1             | 0.9              | 25 × 10             |
| 15 SC 218   | 2.9                     | 1.6           | 0.5              | 30 × 15             |
| 15 SC 219   | 2.4                     | 2             | 0.4              | 32 × 16             |
| 15 SC 63    | 0.8                     | 5             | 0.15             | 45 × 17             |
| 15 SC 108   | 0.8                     | 10            | 0.06             | 54 × 23             |

All chokes are supplied with 50mm minimum lead length of which at least 5mm is solder-dipped.

Note that type 15 SC 108 is bifilar wound with two wires. These must be connected in parallel for correct operation.

\* I<sub>max</sub> = Maximum current at 40 °C ambient. For other temperatures use the "Load Ratings" curve 2 on page 17

To order these chokes please specify the type number.

Dimension are in mm and are nominal values.

## FERROPERM

## CUSTOM INDUCTORS

**from FERROPERM UK Ltd.**

If you already have inductor designs, we will be pleased to quote for their manufacture. Just send us your drawings!

If you would like us to design inductors to meet your requirements, please send us the following information. If you do not have all the information available, please just give what you can.

1. Specify the application. (For example, Energy Storage Choke for a Switched Mode Power Supply). Please give as much information as you can.
2. Specify the maximum dimensions of the space you have available for the inductor.
3. Specify if you require surface mounting or through-hole mounting.
4. If you have a preference for a particular hardware design (for example rod or toroidal), please state it.
5. Specify your estimated requirements of quantities and delivery dates both for short term and long term. This is important because it may influence what hardware is specified for the design.
6. If you have a target or maximum price level, please state it.
7. Specify maximum average direct current flow.
8. Specify maximum peak current flow.
9. Sketch or describe any alternating current waveform (other than interference current). If the waveform is variable, please specify the extremes.

### FOR ENERGY STORAGE CHOKES (INDUCTORS):

10. Specify inductance and widest acceptable tolerance at near zero current, at maximum average current and at maximum peak current.

### FOR ALL OTHER INDUCTORS:

10. EITHER specify inductance and widest acceptable tolerance  
OR specify minimum required impedance at particular frequencies or sketch  
a graph of minimum required impedance  
versus frequency.
11. Specify if common mode (current compensated) design is required.  
(Examples of common mode chokes are shown on page 13.)
12. Specify maximum working voltage between windings if common mode.
13. If this working voltage is a.c., please specify the frequency.

## FERROPERM

## CUSTOM TRANSFORMERS

**from FERROPERM UK Ltd.**

If you already have transformer designs, we will be pleased to quote for their manufacture. Just send us your drawings!

If you would like us to design transformers to meet your requirements, please send us the following information. If you do not have all the information available, please just give what you can.


1. Specify the application. (For example, Switched Mode Power Supply (SMPS) in an instrument). Please give as much information as you can.
2. Indicate by a schematic or describe how the transformer is driven and used. (For example, push-pull FET drive in a SMPS). Please give as much information as you can.
3. Draw a schematic of all windings with turns ratios and widest acceptable tolerance of turns ratios. Indicate polarity of windings where it is important. For windings with one or more taps between the ends, please make clear what turns ratios are required for each section of the winding!
4. Specify what voltage isolation requirements there are between all windings.
5. Draw or describe the voltage waveform which will be applied to the primary winding. If the waveform is variable, please specify the extremes.
6. Specify maximum working currents to be drawn from all secondary windings.
7. If occasional overload conditions have to be met, please specify these separately.
8. Specify the maximum dimensions of the space you have available for the transformer.
9. Specify if you require surface mounting or through-hole mounting.
10. If you have a preference for a particular hardware design (for example ETD, RM or toroidal), please state it.
11. Specify your estimated requirements of quantities and delivery dates both for short term and long term. This is important because it may influence what hardware is specified for the design.
12. If you have a target or maximum price level, please state it.

**FERROPERM**

# INDUCTORS AND TRANSFORMERS

from FERROPERM UK Ltd.

## LOAD RATINGS for CHOKES

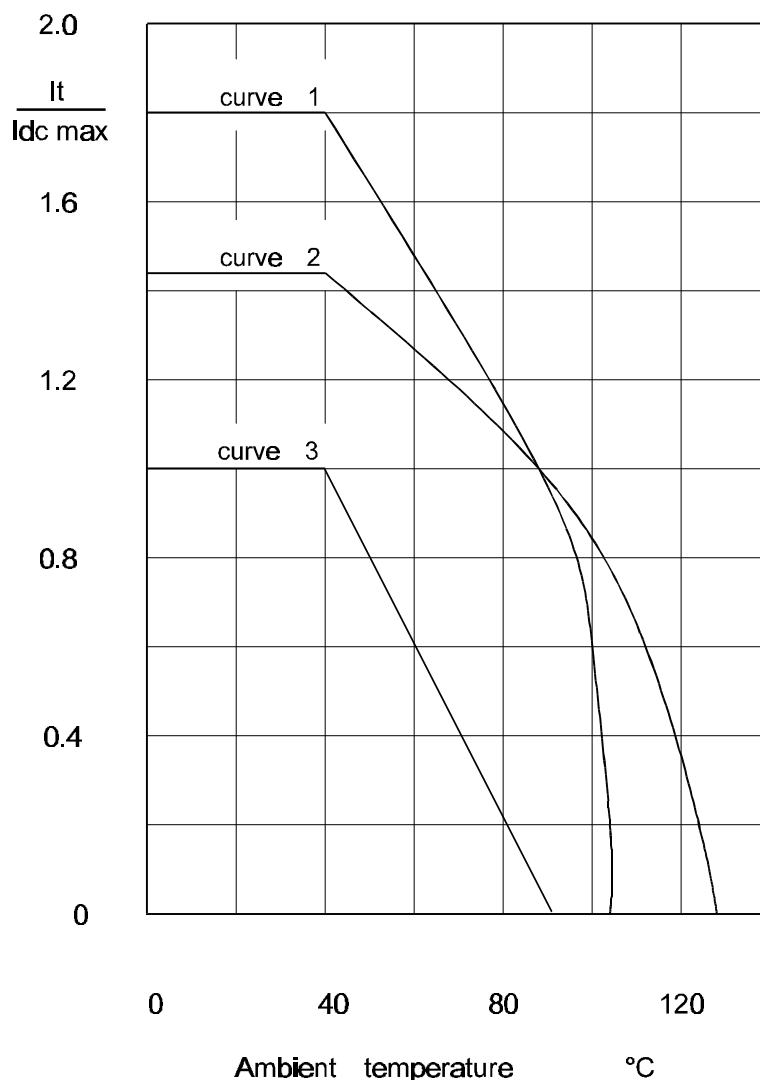

$I_t$  = Maximum current at ambient temperature

$I_{dc \max}$  = Maximum current shown on data sheet.

Whilst every care was taken to avoid any mistakes in the compilation of this catalogue, no responsibility can be assumed for any errors which may have occurred in it.

In line with Ferroperm's policy of continual development, Ferroperm reserves the right to alter specifications of any products without notice.

# FERROPERM

*The Reliable Source ..*

**F E R R O P E R M**

*... serving the*

*electronics industry*

Other products from Ferroperm include . . .

Filtered Sub-D Connectors

Soft magnetic Ferrites & Iron Dust Cores

Hard magnetic Ferrites

Piezo Electric Ceramics

Thin Film Optical Interference Filters

---

FERROPERM UK LTD.  
Vauxhall Industrial Estate,  
Ruabon, Wrexham,  
Clwyd LL14 6HA.  
United Kingdom.  
Phone +44 1978 823 990  
Fax +44 1978 810 128



Catch us on the web at  
<http://www.ferroperm.co.uk>

Email us on  
[mail@ferroperm.co.uk](mailto:mail@ferroperm.co.uk)