

SF/UTP, 100Ω, 4x2xAWG24/1, premium grade Category 5e cables for installation in horizontal and backbone areas

Network Applications:

CCITT I.430 (1) ISDN 0,64/2 Mbit/s; Ethernet IEEE 802.3 10 BaseT 10 Mbit/s; Token Ring IEEE 802.5 4/16 Mbit/s; IEEE 802.12 100 VG AnyLAN 100 Mbit/s; IEEE 802.3u Fast Ethernet 100 BaseT 100 Mbit/s; DQDB; Video; ANSI X3T9.5 FDDI TP-PMD 125 Mbit/s; ATM Forum 155 Mbit/s; IEEE 802.3ab Gigabit Ethernet 1000 BaseT

Applicable Cable & Cabling Standards:

ISO 11801:1995; ISO 11801:1995 & A1,A2:1999; FDIS ISO 11801:2002; FDIS ISO 61156-5
EN 50173:1995 & A1:2000; prEN 50173:2002; EN50167, EN 50169, prEN 50288-2-1

Conformance verified by:

3P Third Party Testing,
Denmark

Cable Structure:



Core

Conductor: 24 AWG Plain Annealed Copper Wire
Insulation: Polyolefin
Diameter: 1.10 mm nominal
Pair: 2 of the above cores
Pair colour code: Blue - White/Blue, Orange - White/Orange, Green - White/Green, Brown - White/Brown

Final Assembly

Cable: 4 of the above pairs
Binder: Wrapped with polyester tape, 100% coverage
Tape screen: Wrapped with aluminium polyester tape, applied metal side out
Braid screen: 0.127mm Tinned Annealed Copper Wire, 30% minimum coverage
Sheath: RAL 7037 Grey PVC or RAL 4005 Violet, flame retardant, zero halogen, thermoplastic, polyolefin compound

Example of print legend for GPS

BRAND-REX LTD GPS 4 PAIR 24 AWG GigaPlus Rev 1 S-FTP IEC 60332-1 ENHANCED
CATEGORY 5 EN 50173 + ISO/IEC 11801 + TIA/EIA 568B NVP 68% WWYY ββββββ *****
(WWYY = Week/Year of manufacture, ββββββ = batch number, ***** = sequential metre mark)

Brand-Rex Part No.	GPS	GPS-D	GPS-HF1	GPS-HF1-D	GPS-HF3	GPS-HF3-D
Outer sheath	PVC	PVC	LSF/OH	LSF/OH	FR-LSF/OH	FR-LSF/OH
Construction	Simplex	Duplex	Simplex	Duplex	Simplex	Duplex
Cable weight	48.9 Kg/km	97.8 Kg/km	51.0 Kg/km	102.0 Kg/km	58.8 Kg/km	117.6 Kg/km
Calorific value	0.14 kWh/m	0.28 kWh/m	0.12 kWh/m	0.24 kWh/m	0.16 kWh/m	0.32 kWh/m
Outer diameter (nom.)	6.1 mm	12.2 x 6.1 mm	6.1 mm	12.2 x 6.1 mm	6.7 mm	13.4 x 6.7 mm
Sheath colour	Grey RAL 7037		Violet RAL 4005			
Fire Safety rating	IEC 60332 Part 1				IEC 60332 Part 3c	
Acid Gas Emissions	na		IEC 60754-2			
Smoke Index	na		IEC 61034			

Rev	Date	Author	Review	Amendment	Description:
	26/04/01	PS	JW	First issue replacing DAT5790	Communication Cable SF/UTP, 100Ω, 4x2xAWG24/1
1	19.11.02	KGH	PK,JW	Changed format & updated specs., added typicals	
					Datasheet No. G40547
Headquarters and Registered Offices : Glenrothes Fife KY6 2RS, Scotland					Tel+44 (0) 1592 772124 Fax +44 (0) 1592 775314
© Brand-Rex Limited. This drawing is the exclusive property of Brand-Rex Limited and must not be copied or reproduced in any way whatsoever without the express consent in writing of Brand-Rex Limited. The drawing is to be used only for the purpose for which it is supplied and must be returned on demand. The contents of the drawing must moreover be treated as strictly confidential and must not be disclosed to any third party without the express consent in writing of Brand-Rex Limited.					

Mechanical characteristics

Minimum bend radius: 8 x Outer Diameter (installation) & 4 x Outer Diameter (operational)
 Temperature range: 0 to 50 °C (installation) & -20 to 75 °C (operational)
 Max Tensile load: 10kg simplex cable (installation)

Electrical Characteristics @ 20°C

Characteristic	Specification	Typical performance
Conductor Loop Resistance	Max 19 Ω /100m	16 Ω /100m
Conductor Resistance Unbalance	Max 2 %	0.5 %
Dielectric Strength	1.0kV d.c. or 0.7kV a.c. for 1min	100% in process test
Insulation resistance	>500 M Ω .km @ 100-500V test voltage	>5 G Ω .km
Capacitance Unbalance to Earth	Max 1600 pF/km	40 pF/km
Velocity of Propagation	<537.6 nS/100m @100MHz	496 nS/100m @100MHz (NVP for hand held testers = 0.68)
Skew	Max 40 nsec/100m @100MHz	25 nsec/100m @100MHz
Mean Characteristic Impedance	100 $\Omega \pm 5\Omega$ @ 100 MHz	100 $\Omega \pm 3\Omega$ @ 100 MHz
Transfer Impedance	Max 100 m Ω /m @ 10MHz	20 m Ω /m @ 10MHz (ISO 61156 grade 2 cable - see fig 2)
Coupling Attenuation up to 1GHz (ffs)	Min 55dB	80dB

frequency (MHz)		1	4	10	16	20	31.25	62.5	100	155	200	250
Insertion Loss (dB/100m)	Spec*	2.1	4.0	6.3	8.0	9.0	11.4	16.5	21.4	na	na	na
	Typical	2.0	3.8	6.0	7.6	8.6	10.8	15.8	20.4	26.1	30.3	34.5
NEXT (dB)	Spec*	65.3	56.3	50.3	47.2	45.8	42.9	38.4	35.3	na	na	na
	Typical	73.3	64.3	58.3	55.2	53.8	50.9	46.4	43.3	40.4	38.8	37.3
PSNEXT (dB)	Spec*	62.3	53.3	47.3	44.2	42.8	39.9	35.4	32.3	na	na	na
	Typical	70.3	61.3	55.3	52.2	50.8	47.9	43.4	40.3	37.4	35.8	34.3
ELFEXT (dB/100m)	Spec*	63.8	51.8	43.8	39.7	37.8	33.9	27.9	23.8	na	na	na
	Typical	78.8	66.8	58.8	54.7	52.8	48.9	42.9	38.8	35.0	32.8	30.8
PSELFEXT (dB/100m)	Spec*	60.8	48.8	40.8	36.7	34.8	30.9	24.9	20.8	na	na	na
	Typical	76.8	64.8	56.8	52.7	50.8	46.9	40.9	36.8	33.0	30.8	28.8
Return loss (dB)	Spec*	na	23.0	25.0	25.0	25.0	23.6	21.5	20.1	na	na	na
	Typical	25.0	28.0	30.0	30.0	30.0	28.6	26.5	25.1	23.8	23.0	22.3
ACR (dB/100m)	Typical	71.3	60.5	52.3	47.6	45.2	40.0	30.6	22.9	14.3	8.5	2.9
PSACR (dB/100m)	Typical	68.3	57.5	49.3	44.6	42.2	37.0	27.6	19.9	11.3	5.5	-0.1

*prEN50288-2-1 December 2001

Figure 1: ACR chart

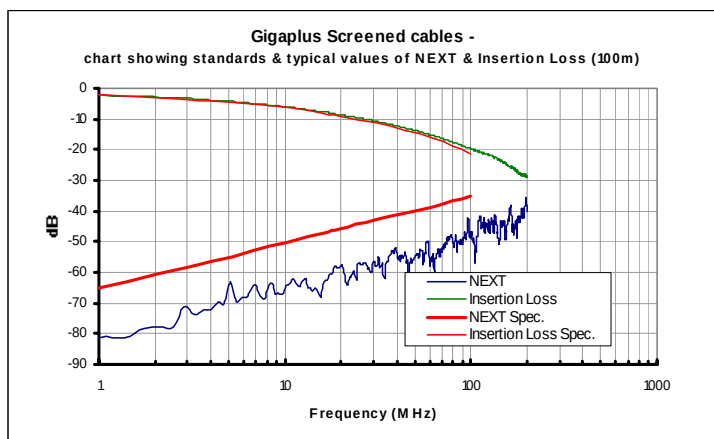


Figure 2: STI chart

