



Heyco® Right Angle Strain Relief Bushings

For Flat Cables





WILL FIT THESE CABLES				PANEL DIMENSIONS						PART NO.		DESCRIPTION	PART DIMENSIONS			
UL Type Designation	AWG/ Conductors	Approximate Size		A Mounting Hole Dia.		B To Prevent Rotation		Maximum Panel Thickness ¹		Black	White		C Head Length	D Body Length		
		in.	mm.	in.	mm.	in.	mm.	in.	mm.			in.	mm.	in.	mm.	
SPT-1	18/2	.12x.22	3,0x5,6	.437	11,1	.390	9,9	.062	1,6	1354	1355	SR 13-1	.234	5,9	.500	12,7
SPT-1	18/3	.12x.30	3,0x7,6													
SPT-2	18/2	.15x.28	3,8x7,1	.500	12,7	.450	11,4	.040	1,0	1361	1362	SR 14A-1	.390	9,9	.687	17,5
HPN	16/2	.16x.30	4,1x7,6													
Same as SR 14A-1 above except								.100	2,5	1364	1365	SR 14-1	.390	9,9	.687	17,5
SPT-2	18/3	.15x.40	3,8x10,2													
SPT-3	18/2	.19x.35	4,8x8,9	.562	14,3	.525	13,3	.125	3,2	1384	1385	SR 16-1	.500	12,7	.859	21,8
	16/2	.20x.37	5,1x9,4													
HPN	16/3	.16x.37	4,1x9,4													
SPT-2	18/3	.15x.40	3,8x10,2													
	16/3	.16x.41	4,1x10,4													
SPT-3	18/2	.19x.35	4,8x8,9	.560	14,2	.730	18,5	.080	2,0	1424	1425	SR 20-1 **	.406	10,3	.812	20,6
	18/3	.19x.39	4,8x8,9	**	**	**	**									
	16/2	.20x.37	5,1x9,4													
	16/3	.20x.43	5,1x10,9													
Same as SR 20-1 above except								.125	3,2	1434	1435	SR 20L-1 **	.406	10,3	.812	20,6
SPT-3	16/2	.20x.37	5,1x9,4													
	16/3	.20x.43	5,1x10,9													
	14/2	.24x.42	6,1x10,7	.750	19,9	.875	22,2	.125	3,2	1454	1455	SR 23-1**	.484	12,3	.937	23,8
	14/3	.24x.51	6,1x13,0	**	**	**	**									
SPT-3	14/2	.24x.42	6,1x10,7													
	14/3	.24x.51	6,1x13,0													
	12/2	.29x.51	7,4x13,0	.875	22,2	.840	21,3	.125	3,2	1464	1465	SR 24-1	.500	12,7	.968	24,6
	12/3	.29x.65	7,4x16,5													
SPT-3	10/3	.32x.66	8,0x16,8	1.093	28,0	1.000	25,4	.125	3,2	1440	1441	SR 21-2	.734	18,6	1.437	36,5

Standard Colors: Black or White. Consult Heyco for other colors.

**Use elongated hole.

¹ Maximum Panel Thickness—Part has additional clearance.

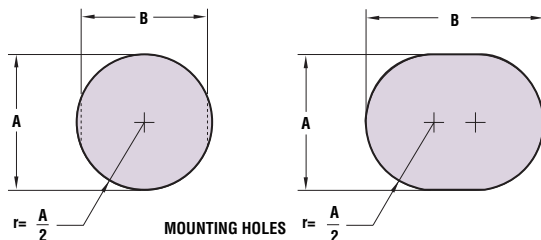

Material	6/6 "Nylon"
Certifications	Recognized under the Component Program of Underwriters' Laboratories File #E-15331
	Certified by the Canadian Standards Association File #LR-8919
Flammability Rating	94V-2
Material Temperature Index	125°C—Maximum temperature on part not to exceed 105°C

Quick Specs