

REVISIONS	
A	DBS DWG CO36515 K S W 18 FEB 76
B	RE-IN CO78497 J A F 21 JUN 94
C	CO- 95612 J J A 1 OCT 99
D	CO94415 TSM 24 NOV 99
E	203709 C S L 10 SEP 01


CATALOG LISTING
2TP7 SERIES
RELEASE NO
CO-78497
CHECK
KAG 7 JUL 94
JAF 21 JUN 94
DRAWN
RASTER

MICRO SWITCH
FREEPORT ILLINOIS U S A
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH - TOGGLE
ABOVE PANEL MOUNT

CATALOG LISTING
2TP7 SERIES
CHART 1

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH A DIVISION OF HONEYWELL THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

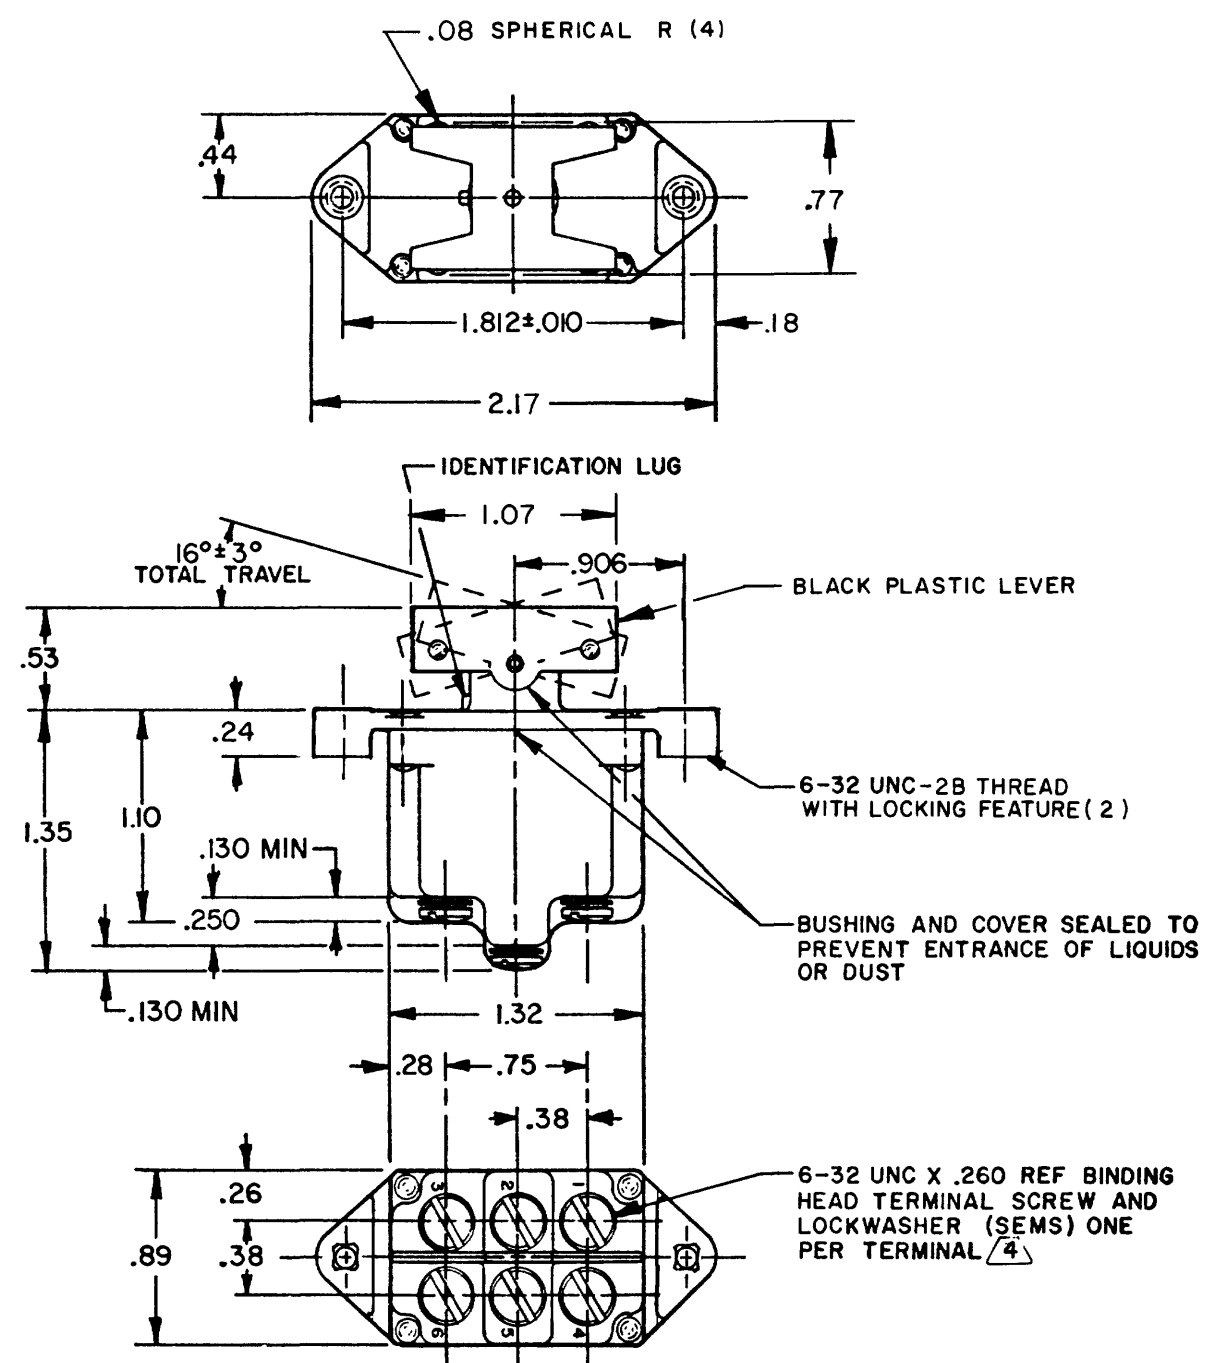

CATALOG LISTING	CIRCUIT MADE WITH BUTTON DEPRESSED ON			ELECTRICAL DATA
	LUG SIDE (1-2,4-5)	CENTER (1-2,4-5)	OPPOSITE LUG (2-3,5-6)	
2TP7-1	ON	OFF	ON	L 191 15A 125, 250, 277 VAC 1/2 HP 125 VAC; 1 HP 250, 277 VAC 5A 125 VAC "L"
2TP7-2	OFF	NONE	ON	
2TP7-3	ON	NONE	ON	
2TP7-21	NONE	OFF	ON	
2TP7-31	NONE	ON	ON	
(E)	MOM OFF	NONE	ON	L 192 10A 125, 250, 277 VAC 1/4 HP 125 VAC; 1/2 HP 250, 277 VAC 3A 125 VAC "L"
2TP7-5	MOM ON	OFF	ON	
(E)	MOM ON	NONE	OFF	
2TP7-7	MOM ON	OFF	MOM ON	
2TP7-8	MOM ON	NONE	ON	
2TP7-51	NONE	ON	MOM ON	
2TP7-61	MOM ON	OFF	NONE	

BUTTON COLOR CODE (5)	
COLOR IDENTIFICATION	COLOR
W	WHITE
R	RED
Y	YELLOW
BK	BLACK
G	GREEN
BL	BLUE
T	TRANSPARENT

- NOTES
- 1 - SWITCH WILL WITHSTAND TEMPERATURE OF 160°F CONTINUOUSLY AT FULL RATED LOAD
 - 2 - MICRO SWITCH CATALOG LISTING MARKED ON SIDE OF SWITCH
 - (3) APPLIES ONLY TO "ON" AND "MOMENTARY ON" POSITIONS
 - (4) SCREWS FURNISHED UNASSEMBLED
 - (5) SUFFIX MUST BE ADDED FOR DESIRED BUTTON COLOR (EXAMPLE: 2TP7-1-W)

THIRD ANGLE PROJECTION

SCALE FULL

DO NOT SCALE PRINT

TOLERANCES
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE UNLESS NOTED. TOLERANCES ARE ±

DIM.	TOL.	DIM.	TOL.
IN	mm/in	IN	mm/in
NO PLACES	X	1/04	
ONE PLACE	X,X	0.4/0.16	X,X
TWO PLACES	X,XX	0.16/0.08	X,XX
THREE PLACES	X,XXX		X,XXX
ANGLES			

SI METRIC ☐ US CUSTOMARY ☒

DESIGN UNITS ☐ SI METRIC ☒

RAW MATERIAL - COMMERCIAL STANDARD
MICRO SWITCH STANDARDS APPLY
DIMENSIONS ARE TO BE MET BEFORE
PROTECTIVE COATINGS ARE APPLIED

WEIGHT .14 LB EST