



GD25: 2500 TO 2700 MHz OPERATION

The 2.5 GHz parabolic grid directional antennas offered by Laird utilize a patented parabolic grid design with a patented high-performance dipole feed. The antennas are constructed of welded steel wires which are galvanized and then powder coat painted with light gray epoxy paint. The wire grid semi-parabolic design offers unsurpassed low wind loading while maintaining good RF performance. The compact low visual impact attractive styling blends well in almost any application. Mounting is simplified with the Laird bracket system made of galvanized steel with stainless steel hardware. The antenna comes with a 30 inch LMR240 pigtail cable with choice of N male or N female connector.


FEATURES

- Designed for WiMAX and MMDS systems
- 15 dBi, 19 dBi and 24 dBi models available
- Rugged and weatherproof
- Ultra low wind loading and low visual impact
- Vertical or horizontal polarization
- Various connector choices


MARKETS

- WiMAX applications
- Client antennas
- MMDS applications
- Point-to-point backhaul


ANTENNA PATTERNS

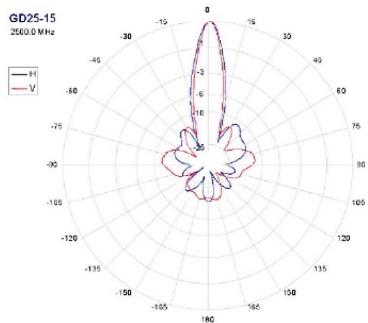

GD25-15

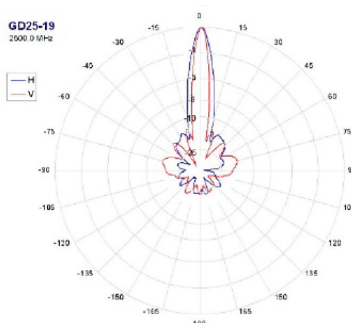

GD25-19

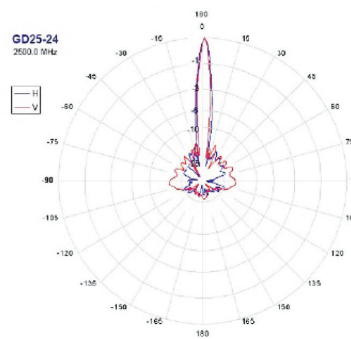

GD25-24

SPECIFICATIONS

PARAMETER	MODEL	MIN	TYP	MAX	UNITS
Frequency Range		2500		2700	MHz
Gain	GD25-15 GD25-19 GD25-24		15 19 24		dBi
3dB Beamwidth	GD25-15 GD25-19 GD25-24		17V, 21H 11V, 17H 8V, 10H		Deg
Front-to-Back	GD25-15 GD25-19 GD25-24	17 22 25			dB
VSWR			1.5:1		
Impedance			50		ohm
Input Power				100	W
Operating Temperature		-40		+70	Deg C
Pole Size		1 (25)		2 (50)	in (mm)
Weight	GD25-15 GD25-19 GD25-24		4 (1.8) 6 (2.7) 11 (5)		lbs (kg)
Dimension (W x L)	GD25-15 GD25-19 GD25-24		12 x 16 (305 x 406) 16.5 x 24 (419 x 610) 28.5 x 36 (724 x 914)		in (mm)
Bracket Tilt				45	Deg

WIND LOADING (LBS.)

MODEL	SQ. IN	100 MPH	125 MPH	100 MPH WITH ½ in RADIAL ICE
GD25-15	40	10	15.6	48
GD25-19	79	20	31	99
GD25-24	163	41	64	257

SYSTEM ORDERING INFORMATION

GD25 - _ _ _ p - _ _ _ _
 15 NM (N male)
 19 NF (N female)
 24

NOTES

- All shipments F.O.B. Schaumburg, IL 60173

Americas: +1.847.839.6907
 IAS-AmericasEastSales@lairdtech.com
 Europe: +44.1628.858941
 IAS-EUSales@lairdtech.com
 Asia: +86.21.5855.0827.127
 IAS-AsiaSales@lairdtech.com
www.lairdtech.com

ANT-DS-GD25 0115

Any information furnished by Laird Inc. and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird materials rests with the end user, since Laird and its agents cannot be aware of all potential uses. Laird makes no warranties as to the fitness, merchantability or suitability of any Laird materials or products for any specific or general uses. Laird shall not be liable for incidental or consequential damages of any kind. All Laird products are sold pursuant to the Laird Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request. © Copyright 2015 Laird Inc. All Rights Reserved. Laird, Laird Technologies, the Laird Logo, and other marks are trademarks or registered trademarks of Laird Inc. or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird or any third party intellectual property rights.