

MAX16072/MAX16073/MAX16074

μP Supervisory Circuits in 4-Bump (1mm x 1mm) Chip-Scale Package

General Description

The MAX16072/MAX16073/MAX16074 ultra-small, ultra-low-power, microprocessor (μP) supervisory circuits feature a precision band-gap reference, comparator, and internally trimmed resistors that set the threshold voltage. Designed to monitor the system supply voltage and assert an output during power-up, power-down, and brownout conditions, these devices provide excellent circuit reliability and low cost by eliminating external components and adjustments when monitoring nominal system voltage from 1.8V to 3.6V.


The MAX16072 has a push-pull, active-low reset output, the MAX16073 has a push-pull, active-high reset output, and the MAX16074 has an open-drain active-low reset output. The devices are designed to ignore fast transients on V_{CC}. The devices also include a manual reset input (MR).

The MAX16072/MAX16073/MAX16074 are available in a 1mm x 1mm, space-saving, 4-bump, chip-scale package (UCSP™).

Applications

Portable/Battery-Powered Equipment
Cell Phones
PDAs
MP3 Players
Digital Cameras

Typical Operating Circuit

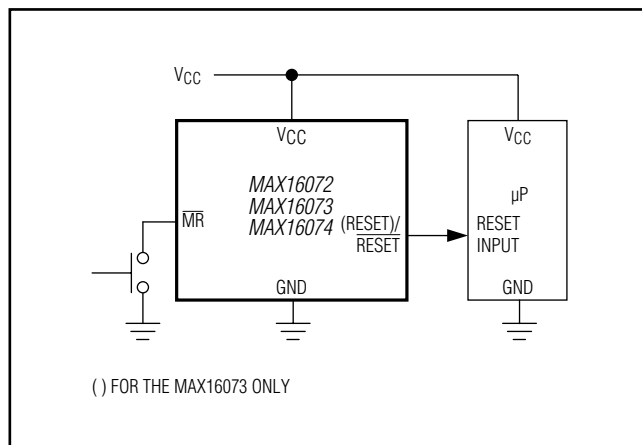

Features

- ♦ Ultra-Low, 0.7μA Supply Current
- ♦ Ultra-Small (1mm x 1mm), 4-Bump UCSP
- ♦ 20μs, 8ms, 34ms, and 140ms Reset Timeout Options Available
- ♦ Factory-Trimmed Reset Thresholds Available from 1.58V to 3.08V in Approximately 100mV Increments
- ♦ ±2.5% Threshold Accuracy Over Temperature
- ♦ Manual Reset Input
- ♦ Guaranteed Reset Valid to V_{CC} = 1.0V
- ♦ Immune to Short V_{CC} Transient

Ordering Information

PART	RESET OUTPUT TYPE	PIN-PACKAGE
MAX16072RS_ _D_+	Push-Pull, Active-Low	4 UCSP
MAX16073RS_ _D_+	Push-Pull, Active-High	4 UCSP
MAX16074RS_ _D_+	Open-Drain, Active-Low	4 UCSP

+Denotes a lead(Pb)-free/RoHS-compliant package.

Note: All devices are specified over the -40°C to +85°C operating temperature range.

Insert the desired suffix numbers (from Table 1) into the blanks "RS_ _D" to indicate the reset trip threshold. Insert the desired suffix number (from Table 2) into the blank "D_+" to indicate the reset timeout. Minimum order quantity may apply.

UCSP is a trademark of Maxim Integrated Products, Inc.

MAX16072/MAX16073/MAX16074

µP Supervisory Circuits in 4-Bump (1mm x 1mm) Chip-Scale Package

ABSOLUTE MAXIMUM RATINGS

(Voltages referenced to GND.)

VCC, $\overline{\text{MR}}$ -0.3V to +6V
 RESET, $\overline{\text{RESET}}$ Push-Pull -0.3V to (VCC + 0.3V)
 RESET Open-Drain -0.3V to +6V
 Output Current (all pins) $\pm 20\text{mA}$
 Continuous Power Dissipation (TA = +70°C)
 4-Bump UCSP (derate 3mW/°C above +70°C) 239mW

Operating Temperature Range -40°C to +85°C
 Storage Temperature Range -65°C to +150°C
 Junction Temperature +150°C
 Soldering Temperature (reflow) +260°C

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

ELECTRICAL CHARACTERISTICS

(VCC = 1.5V to 5.5V, TA = -40°C to +85°C, unless otherwise noted. Typical values are at TA = +25°C and VCC = 3.6V.) (Note 1)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Operating Voltage Range	VCC	TA = 0°C to +85°C	1.0		5.5	V
		TA = -40°C to +85°C	1.2		5.5	
Supply Current	ICC	VCC = 1.8V for VTH ≤ 1.66V		0.7	1.2	µA
		VCC = 3.6V, no load		1.0	1.5	
Detector Threshold	VTH	See Table 1	VCC falling, TA = +25°C	VTH - 1.5%	VTH + 1.5%	V
			VCC falling, TA = -40°C to +85°C	VTH - 2.5%	VTH + 2.5%	
Detector Threshold Hysteresis	VHYS	VCC rising, VTH ≤ 1.66V (Note 2)		6.3		mV
Detector Threshold Tempco	ΔVTH/°C	(Note 2)		40		ppm/°C
$\overline{\text{MR}}$ INPUT						
$\overline{\text{MR}}$ Input High Voltage	VIH		0.7 x VCC			V
	VIL			0.7 x VCC		
$\overline{\text{MR}}$ Pullup Resistance			25	50	75	kΩ
RESET/RESET OUTPUT (Note 3)						
Output-Voltage Low	VOL	VCC ≥ 1.2V, ISINK = 100µA			0.4	V
		VCC ≥ 1.65V, ISINK = 1mA			0.3	
Output-Voltage High	VOH	VCC ≥ 1.65V, ISOURCE = 500µA	0.8 x VCC			V
		VCC ≥ 1.2V, ISOURCE = 50µA	0.8 x VCC			
Open-Drain $\overline{\text{RESET}}$ Output Leakage Current		$\overline{\text{RESET}}$ not asserted (Note 2)			0.1	µA
TIMING						
$\overline{\text{MR}}$ Minimum Pulse Width	tMPW	(Note 2)	0.8			µs
$\overline{\text{MR}}$ Glitch Rejection	tEGR	(Note 2)		100		ns
$\overline{\text{MR}}$ to RESET/RESET Propagation Delay	tOFF	$\overline{\text{MR}}$ falling		1	2	µs
	tON	$\overline{\text{MR}}$ rising		200	400	ns
VCC to Reset Delay	tDL	VCC = (VTH + 100mV) to (VTH - 100mV)		20	90	µs

MAX16072/MAX16073/MAX16074

μ P Supervisory Circuits in 4-Bump (1mm x 1mm) Chip-Scale Package

ELECTRICAL CHARACTERISTICS (continued)

($V_{CC} = 1.5V$ to $5.5V$, $T_A = -40^{\circ}C$ to $+85^{\circ}C$, unless otherwise noted. Typical values are at $T_A = +25^{\circ}C$ and $V_{CC} = 3.6V$.) (Note 1)

PARAMETER	SYMBOL	CONDITIONS		MIN	TYP	MAX	UNITS
Reset Active Timeout Period	tRP	VCC rising, VCC = (VTH - 100mV) to (VTH + 100mV)	MAX1607_RSD0+	20	80	120	μs
			MAX1607_RSD1+	8	13	17	ms
			MAX1607_RSD2+	34	52	69	ms
			MAX1607_RSD3+	140	210	280	ms




Note 1: Production testing done at $T_A = +25^{\circ}C$ only. Overtemperature limits are guaranteed by design and are not production tested.

Note 2: Guaranteed by design.

Note 3: Reset is guaranteed down to $V_{CC} = 1.0V$.

Typical Operating Characteristics

($T_A = +25^{\circ}C$, unless otherwise noted.)







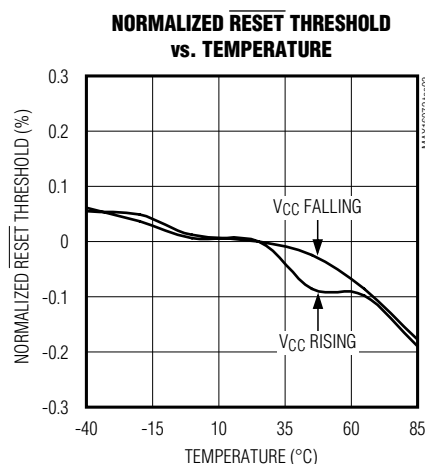
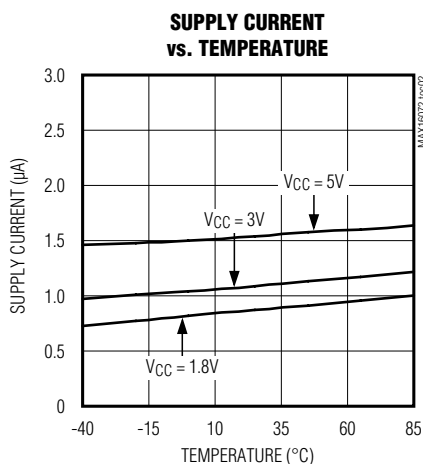
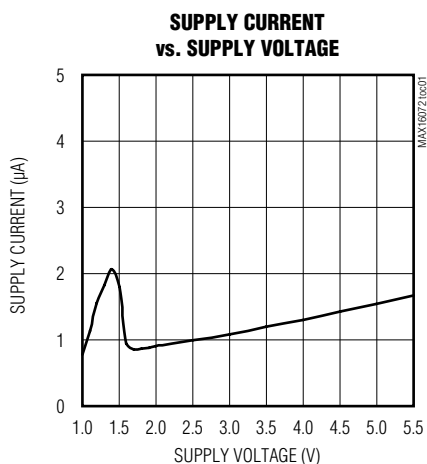


MAX16072/MAX16073/MAX16074

μ P Supervisory Circuits in 4-Bump (1mm x 1mm) Chip-Scale Package

Typical Operating Characteristics (continued)


($T_A = +25^\circ\text{C}$, unless otherwise noted.)

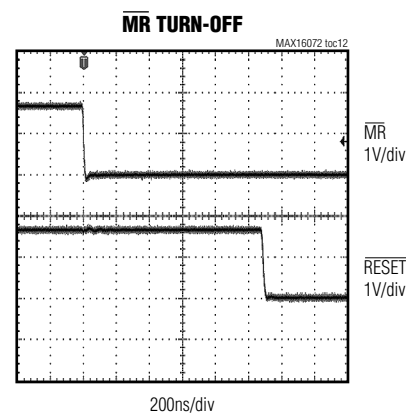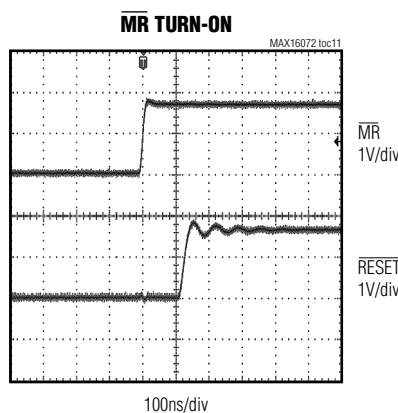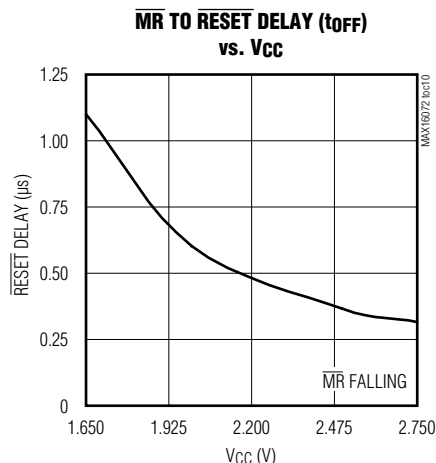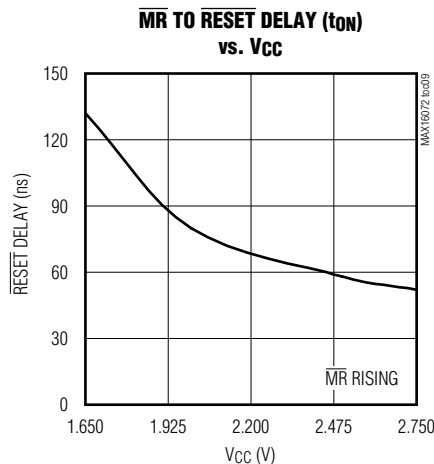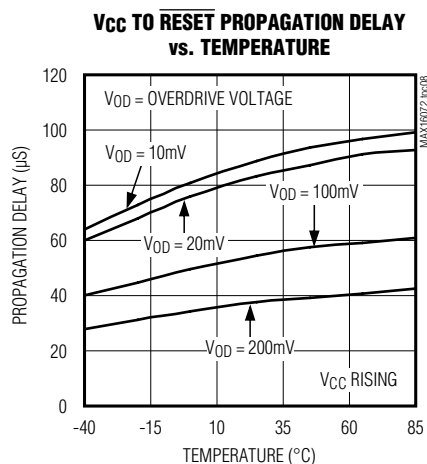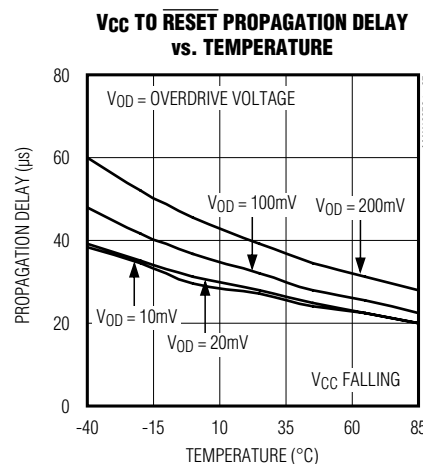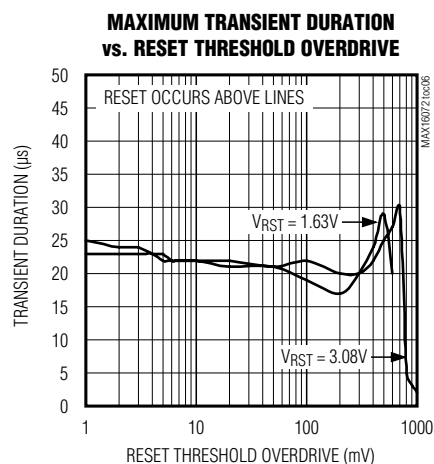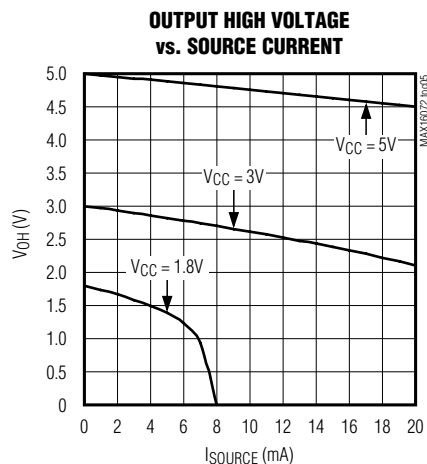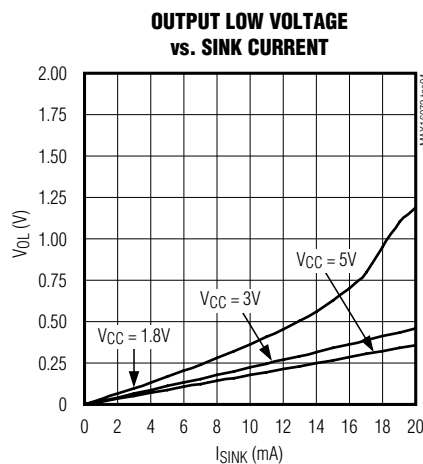

MAX16072/MAX16073/MAX16074

μ P Supervisory Circuits in 4-Bump (1mm x 1mm) Chip-Scale Package

Bump Configuration

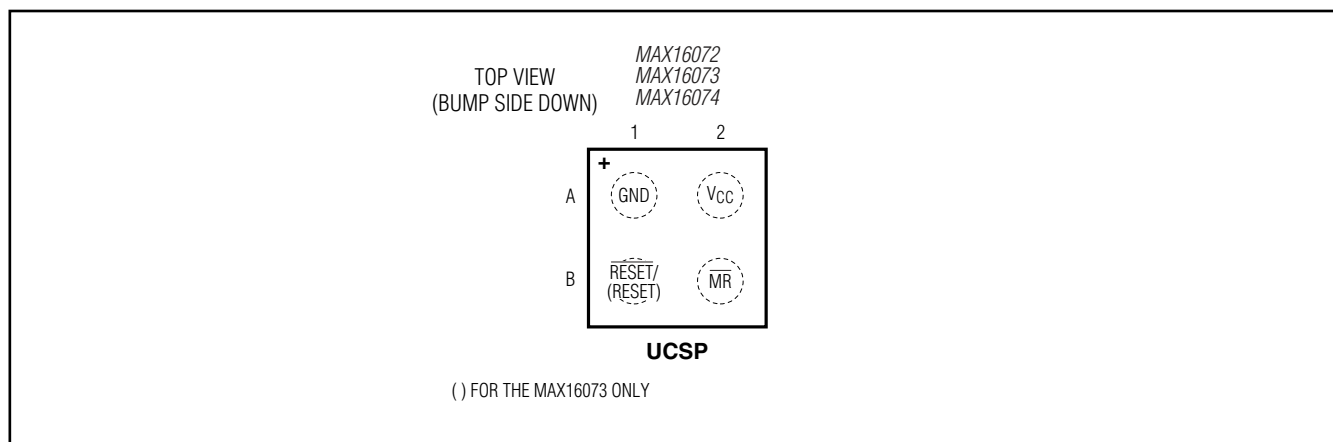


Bump Description

BUMP			NAME	FUNCTION
MAX16072	MAX16073	MAX16074		
A1	A1	A1	GND	Ground
B1	—	—	$\overline{\text{RESET}}$	Active-Low Push-Pull Reset Output. $\overline{\text{RESET}}$ changes from high to low when V_{CC} drops below the detector threshold (V_{TH}) or $\overline{\text{MR}}$ is pulled low. $\overline{\text{RESET}}$ remains low for the reset timeout period after V_{CC} exceeds V_{TH} and $\overline{\text{MR}}$ is high. When $\overline{\text{MR}}$ is low, $\overline{\text{RESET}}$ is low.
—	B1	—	RESET	Active-High Push-Pull Reset Output. $\overline{\text{RESET}}$ changes from low to high when V_{CC} drops below the detector threshold (V_{TH}) or $\overline{\text{MR}}$ is pulled low. $\overline{\text{RESET}}$ remains high for the reset timeout period after V_{CC} exceeds V_{TH} and $\overline{\text{MR}}$ is high. When $\overline{\text{MR}}$ is low, $\overline{\text{RESET}}$ is high.
—	—	B1	$\overline{\text{RESET}}$	Active-Low Open-Drain Reset Output. $\overline{\text{RESET}}$ changes from high-impedance to active-low when V_{CC} drops below the detector threshold (V_{TH}) or $\overline{\text{MR}}$ is pulled low. $\overline{\text{RESET}}$ remains low for the reset timeout period after V_{CC} exceeds the reset threshold and $\overline{\text{MR}}$ is high. When $\overline{\text{MR}}$ is low, $\overline{\text{RESET}}$ is low.
A2	A2	A2	V_{CC}	Supply Voltage and Input for the Reset Threshold Monitor
B2	B2	B2	$\overline{\text{MR}}$	Active-Low Manual-Reset Input. Drive low to force a reset. Reset remains active as long as $\overline{\text{MR}}$ is low and for the reset timeout period (if applicable) after $\overline{\text{MR}}$ is driven high. $\overline{\text{MR}}$ has an internal pullup resistor connected to V_{CC} , and may be left unconnected if not used.

MAX16072/MAX16073/MAX16074

μP Supervisory Circuits in 4-Bump (1mm x 1mm) Chip-Scale Package

Functional Diagrams

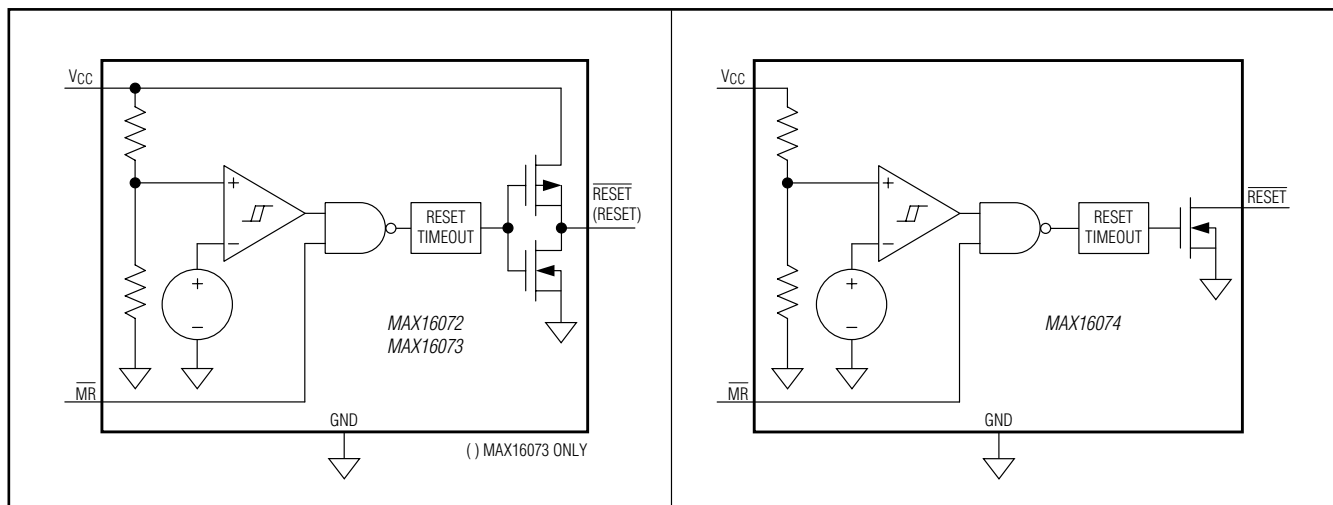

Detailed Description

The MAX16072/MAX16073/MAX16074 ultra-small, ultra-low-power, μP supervisory circuits feature a precision band-gap reference, comparator, and internally trimmed resistors that set specified trip threshold voltages. Designed to monitor the system supply voltage and an output during power-up, power-down, and brownout conditions, these devices provide excellent circuit reliability and low cost by eliminating external components and adjustments when monitoring nominal system voltage from 1.8V to 3.6V.

The MAX16072 has a push-pull active-low reset output, the MAX16073 has a push-pull active-high reset output, and the MAX16074 has an open-drain active-low reset

output. The devices are designed to ignore fast transients on VCC. The devices also include a manual reset input (MR). When MR is low, reset is asserted. When MR is high and VCC is above the detector threshold (VTH), reset is not asserted.

Supply and Monitored Input (VCC)

The MAX16072/MAX16073/MAX16074 operate with a VCC supply voltage from 1.2V to 5.5V. VCC has a rising threshold of VTH + VHYS and a falling threshold of VTH. When VCC rises above VTH + VHYS and MR is high, RESET goes high (RESET goes low) after the reset timeout period (tRP). See Figure 1.

When VCC falls below VTH, RESET goes low (RESET goes high) after a fixed delay (tRD).

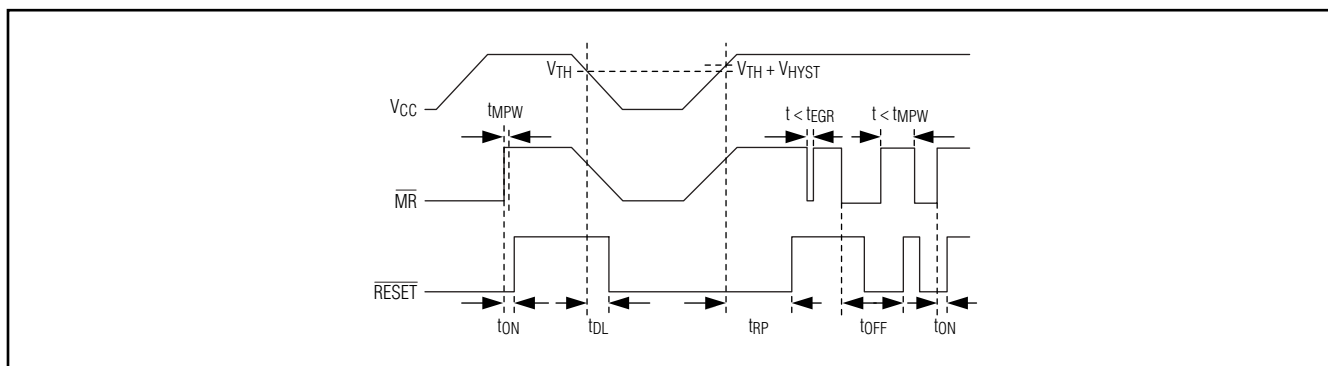


Figure 1. MAX16072/MAX16073/MAX16074 Timing Diagram

MAX16072/MAX16073/MAX16074

μP Supervisory Circuits in 4-Bump (1mm x 1mm) Chip-Scale Package

Manual Reset Input ($\overline{MR}$)

Many μP-based products require manual-reset capability, allowing the operator, a test technician, or external logic circuit to initiate a reset. A logic-low on $\overline{MR}$ asserts reset. Reset remains asserted while $\overline{MR}$ is low, and for the reset active timeout period (tRP) or delay (tON) after $\overline{MR}$ returns high. This input has an internal 50kΩ pullup resistor, so it can be left unconnected if it is not used. $\overline{MR}$ can be driven with TTL or CMOS logic levels, or with open-drain/collector outputs. For manual operation, connect a normally open momentary switch from $\overline{MR}$ to GND; external debouncing circuitry is not required. If $\overline{MR}$ is driven from long cables or if the device is used in a noisy environment, connect a 0.1μF capacitor from $\overline{MR}$ to ground to provide additional noise immunity.

Applications Information

Interfacing to μP with Bidirectional Reset Pins

Since $\overline{RESET}$ on the MAX16074 is open-drain, this device interfaces easily with μPs that have bidirectional reset pins. Connecting the μP supervisor's $\overline{RESET}$ output directly to the μP's $\overline{RESET}$ pin with a single pullup resistor allows either device to assert reset (Figure 2).

Negative-Going VCC Transients

The MAX16072/MAX16073/MAX16074 family of devices is relatively immune to short-duration, negative-going VCC transients (glitches). The *Typical Operating Characteristics* show the Maximum Transient Duration vs. Reset Threshold Overdrive graph, for which reset pulses are not generated. The graph shows the maximum pulse width that a negative-going VCC transient may typically have when issuing a reset signal. As the amplitude of the transient increases, the maximum allowable pulse width decreases.

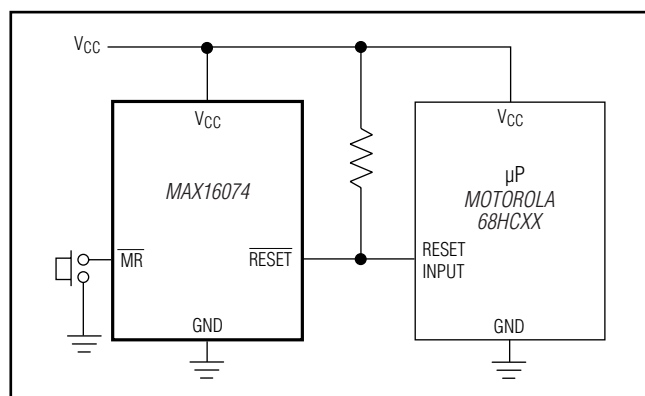


Figure 2. Interfacing to μP with Bidirectional Reset Pins

Table 1. Factory Trimmed Reset Thresholds

THRESHOLD SUFFIX	RESET TRIP THRESHOLD (V)		
	TA = +25°C	TA = -40°C to +85°C	
	TYP	MIN	MAX
15	1.58	1.54	1.61
16	1.63	1.60	1.66
17	1.67	1.62	1.71
18	1.80	1.76	1.85
19	1.90	1.85	1.95
20	2.00	1.95	2.05
21	2.10	2.05	2.15
22	2.20	2.145	2.25
23	2.32	2.262	2.375
24	2.40	2.34	2.46
25	2.50	2.437	2.562
26	2.63	2.564	2.69
27	2.70	2.633	2.768
28	2.80	2.63	2.87
29	2.93	2.857	3.0
30	3.00	2.925	3.075
31	3.08	3.003	3.15

Table 2. Reset Timeout Periods

RESET TIMEOUT PERIODS				
SUFFIX	MIN	TYP	MAX	UNITS
0	20	80	120	μs
1	8	13	17	ms
2	34	52	69	ms
3	140	210	280	ms

MAX16072/MAX16073/MAX16074

μ P Supervisory Circuits in 4-Bump (1mm x 1mm) Chip-Scale Package

Chip Information

PROCESS: BiCMOS

Package Information

For the latest package outline information and land patterns, go to www.maximintegrated.com/packages. Note that a "+", "#", or "-" in the package code indicates RoHS status only. Package drawings may show a different suffix character, but the drawing pertains to the package regardless of RoHS status.

PACKAGE TYPE	PACKAGE CODE	DOCUMENT NO.
4 UCSP	R41C1-1	21-0242

MAX16072/MAX16073/MAX16074

μP Supervisory Circuits in 4-Bump (1mm x 1mm) Chip-Scale Package

Revision History

REVISION NUMBER	REVISION DATE	DESCRIPTION	PAGES CHANGED
0	1/10	Initial release	—
1	3/15	Changed upper V_{CC} supply range from 2.75V to 5.5V	2, 3, 6



Maxim Integrated cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim Integrated product. No circuit patent licenses are implied. Maxim Integrated reserves the right to change the circuitry and specifications without notice at any time. The parametric values (min and max limits) shown in the Electrical Characteristics table are guaranteed. Other parametric values quoted in this data sheet are provided for guidance.

Maxim Integrated 160 Rio Robles, San Jose, CA 95134 USA 1-408-601-1000

9