

2001

1.0 Watt - 28 Volts, Class C
Microwave 2000 MHz

GENERAL DESCRIPTION

The 2001 is a COMMON BASE transistor capable of providing 1 Watts Class C, RF output power at 2000 MHz. Gold Metalization and diffused ballasting are used to provide high reliability and supreme ruggedness. The transistor uses a fully hermetic High Temperature Solder Sealed package.

ABSOLUTE MAXIMUM RATINGS

Maximum Power Dissipation @ 25°C 5.0 Watts

Maximum Voltage and Current

BVces Collector to Emitter Voltage 50 Volts

BVebo Emitter to Base Voltage 3.5 Volts

Ic Collector Current 0.25 A


Maximum Temperatures

Storage Temperature - 65 to + 200°C

Operating Junction Temperature + 200°C

CASE OUTLINE

55BT-1, Style 1

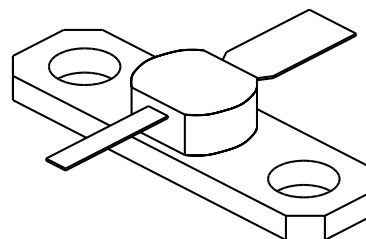

ELECTRICAL CHARACTERISTICS @ 25 °C

SYMBOL	CHARACTERISTICS	TEST CONDITIONS	MIN	TYP	MAX	UNITS
P_{out}	Power Out	F = 2 GHz	1.0			Watt
P_{in}	Power Input	V _{cb} = 28 Volts			0.125	Watt
P_g	Power Gain	P _o = 1.0 Watts	9.0	9.5		dB
η_c	Collector Efficiency	As Above		40		%
VSWR₁	Load Mismatch Tolerance	F = 2 GHz, P _o = 1.0 W			30:1	

BVces	Collector to Emitter Breakdown	I _c = 10 mA	50			Volts
BVcbo	Collector to Base Breakdown	I _c = 1 mA	45			Volts
BVebo	Emitter to Base Breakdown	I _e = 1.0 mA	3.5			Volts
Icbo	Collector to Base Current	V _{cb} = 28 Volts			500	μA
h_{FE}	Current Gain	V _{ce} = 5 V, I _c = 100 mA	20			
Cob	Output Capacitance	F = 1 MHz, V _{cb} = 28 V		4.0		pF
θ_{jc}	Thermal Resistance				35	°C /W


Issue August 1996

GHz TECHNOLOGY INC. RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE. GHz RECOMMENDS THAT BEFORE THE PRODUCT(S) DESCRIBED HEREIN ARE WRITTEN INTO SPECIFICATIONS, OR USED IN CRITICAL APPLICATIONS, THAT THE PERFORMANCE CHARACTERISTICS BE VERIFIED BY CONTACTING THE FACTORY.

GHz Technology Inc. 3000 Oakmead Village Drive, Santa Clara, CA 95051-0808 Tel. 408 / 986-8031 Fax 408 / 986-8120


POWER OUTPUT VS FREQUENCY

$V_{cc}=28V$, $P_{in}=0.125W$

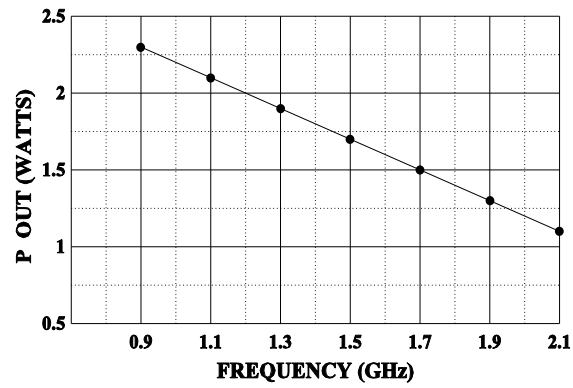


EFFICIENCY VS FREQUENCY

$V_{cc}=28V$

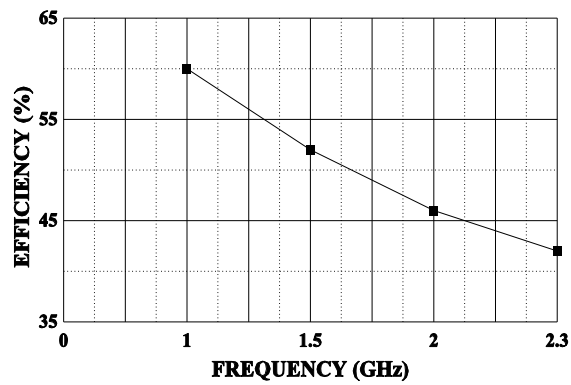

POWER OUTPUT VS POWER INPUT


$V_{cc}=28V$

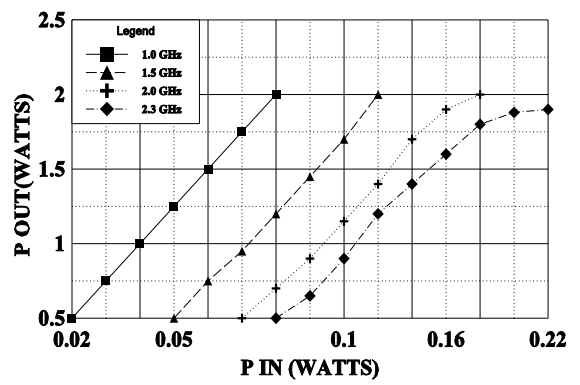

SMITH CHART

2001

NORMALIZED IMPEDANCE AND ADMITTANCE COORDINATES

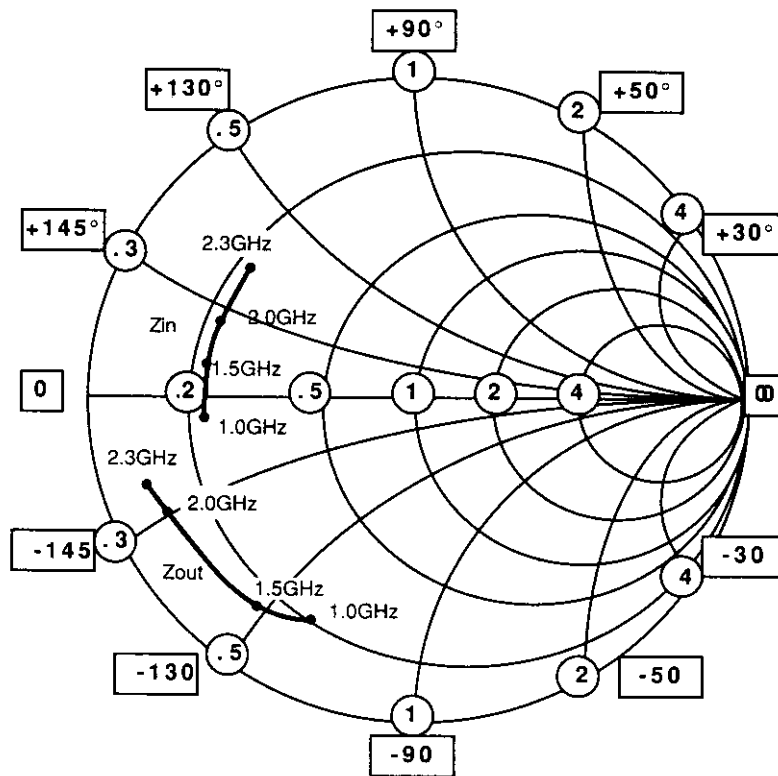


NORMALIZED TO A 50 OHM SYSTEM.


REVISIONS

ZONE	REV	DESCRIPTION	DATE	APPROVED
------	-----	-------------	------	----------

DIM	INCHES
A	.650
B	.300
C	.510
D	.050
E	.315
F	.420
G	.640
H	.300
I	.200
J	.330
K	.180
L	.710
M	.720
N	.300
O	.400

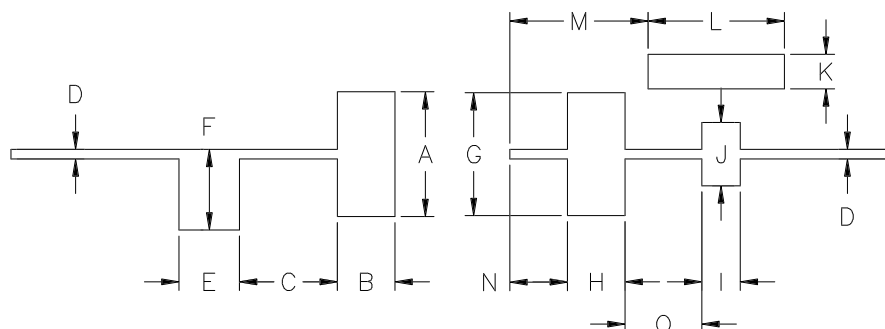

2001 TEST AMPLIFIER
F = 2.0 GHz

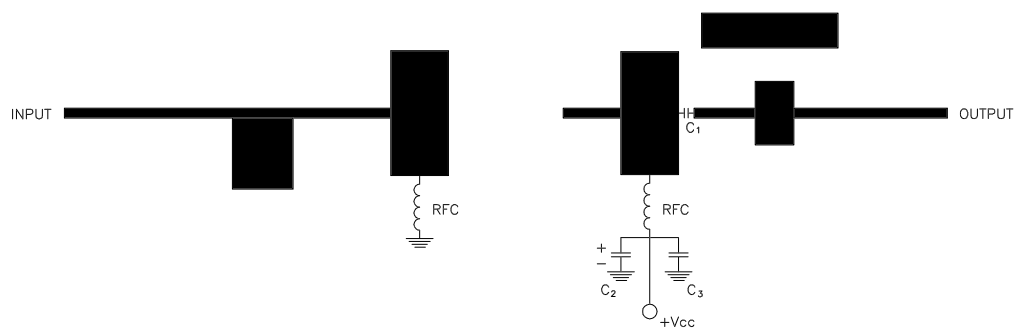

— = MICROSTRIP ON 15 MIL DUROID $\epsilon_r = 2.3$
 C_1 = 3.6 ATC A CHIP
 C_2 = 180pf ATC B CHIP
 C_3 = 10 MFD 50V



CHz TECHNOLOGY

CAGE
OPJR2

DWG NO.

2001

REV

A

SCALE

1/1

SHEET