

Low Noise, High IP3

Monolithic Amplifier

PMA-5451+

50Ω 0.05 to 6 GHz



3mm x 3mm MCLP Pkg

The Big Deal

- Ultra Low Noise Figure, 0.6 dB
- High IP3/Low Current, 30mA
- Wideband, up to 6 GHz

Product Overview

Mini-Circuits PMA-5451+ is a E-PHEMT based Ultra-Low Noise MMIC Amplifier operating from 50 MHz to 6 GHz with a unique combination of low noise and high IP3 making this amplifier ideal for sensitive receiver applications. This design operates on a single 3V supply at only 30mA and is internally matched to 50 Ohms.

Key Features

Feature	Advantages
Ultra Low Noise, 0.6 dB	Outstanding Noise Figure, measured in a 50 Ohm environment without any external matching
High IP3, 29 dBm	Combining Low Noise and High IP3 makes this MMIC amplifier ideal for Low Noise Receiver Front End (RFE) because it gives the user advantages at both ends of the dynamic range: sensitivity & two-tone spur-free dynamic range
Low Current, 30mA	At only 30mA, the PMA-5451+ is ideal for remote applications with limited available power or densely packed applications where thermal management is critical.
Broad Band	Operating over a broadband the PMA-5451+ covers the primary wireless communications bands: Cellular, PCS, LTE, WiMAX
Internally Matched	No external matching elements required to achieve the advertised noise and output power over the full band
MCLP Package	Low Inductance, repeatable transitions, excellent thermal pad
Max Input Power, +20dBm	Ruggedized design operates up to input powers of +20dBm without the need of an external limiter
High Reliability	Low, small signal operating current of 30 mA nominal maintains junction temperatures typically below 100°C at 85°C ground lead temperature

Notes

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Low Noise, High IP3

Monolithic Amplifier

0.05-6 GHz

Product Features

- Single Positive Supply Voltage, 3V, $I_d=30\text{mA}$
- Ultra Low Noise Figure, 0.6 dB typ. at 0.5GHz
- High IP3, 29 dBm typ. 1GHz
- Gain, 19dB typ. at 1 GHz
- Output Power, up to +17dBm typ.
- Micro-miniature size - 3mm x 3mm
- Aqueous washable

Typical Applications

- Cellular
- ISM
- GSM
- WCDMA
- LTE
- WiMAX
- WLAN
- UNII and HIPERLAN



PMA-5451+

CASE STYLE: DQ849



+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

General Description

PMA-5451+ is a high dynamic range, low noise, high IP3, high output power, monolithic amplifier. Manufactured using E-PHEMT* technology enables it to work with a single positive supply voltage.

simplified schematic and pad description

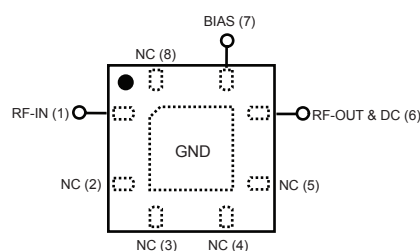

Function	Pad Number	Description (See Application Circuit, Fig. 3)
RF-IN	1	RF input pad
RF-OUT & DC	6	RF output pad (connected to RF-OUT via blocking external cap C2, and Supply voltage Vs via RF Choke L1)
BIAS	7	Bias pad (connected to Vs via Rbias)
GND	paddle in center of bottom	Connected to ground
NOT USED	2,3,4,5,8	No internal connection; recommended use: per PCB Layout PL-299

*Enhancement mode Pseudomorphic High Electron Mobility Transistor.

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits' standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. C
M151107
PMA-5451+
TH/RS/CP/AM
150924
Page 2 of 6

Electrical Specifications⁽¹⁾ at 25°C, $Z_0=50\Omega$, (refer to characterization circuit, Fig. 1)

Parameter	Condition (GHz)	Min.	Typ.	Max.	Units
Frequency Range		0.05		6.0	GHz
DC Voltage (V_d)			3.0		V
DC Current (I_d) ⁽⁶⁾		20	30	40	mA
DC Current (I_{Rbias})			1.6		mA
Noise Figure	0.05		1.3	—	dB
	0.5		0.6	—	
	1.0		0.8	—	
	2.0		1.0	1.3	
	3.0		1.3	—	
	4.0		1.5	—	
	5.0		2.0	—	
	6.0		2.3	—	
Gain	0.05	—	24.2	—	dB
	0.5	—	22.1	—	
	1.0	—	18.6	—	
	2.0	12.3	13.7	15.1	
	3.0	—	10.6	—	
	4.0	—	8.5	—	
	5.0	—	6.7	—	
	6.0	—	5.3	—	
Input Return Loss	0.05-0.5		8.8		dB
	0.5-6		6.5		
Output Return Loss	0.05-0.1		14.0		dB
	0.1-6		19.0		
Output IP3	0.05		27.3		dBm
	0.5		27.9		
	1.0		29.0		
	2.0		30.8		
	3.0		31.4		
	4.0		30.8		
	5.0		31.8		
	6.0		32.2		
Output Power @ 1 dB compression ⁽²⁾	0.05		17.0		dBm
	0.5		17.0		
	1.0		17.0		
	2.0		16.9		
	3.0		16.8		
	4.0		16.9		
	5.0		17.4		
	6.0		17.3		
DC Current Variation vs. Temperature ⁽³⁾			-0.030		mA/°C
Thermal Resistance			128		°C/W

Absolute Maximum Ratings⁽⁴⁾

Parameter	Ratings
Operating Temperature ⁽⁵⁾	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Channel Temperature	150°C
DC Voltage (Pad 6)	5V
Power Dissipation	500mW
DC Current (Pad 6)	80mA
Bias Current (Pad 7)	10mA
Input Power ⁽⁷⁾	20dBm

⁽¹⁾ Measured on Mini-Circuits Characterization test board TB-502+ See Characterization Test Circuit (Fig. 1)

⁽²⁾ P1dB specified with external current limiting of 40mA; Capable of higher P1dB at higher current (see Fig.2)

⁽³⁾ (Current at 85°C - Current at -45°C)/130

⁽⁴⁾ Permanent damage may occur if any of these limits are exceeded. These maximum ratings are not intended for continuous normal operation.

⁽⁵⁾ Defined with reference to ground pad temperature.

⁽⁶⁾ Specified DC current consumption is under small signal conditions. Current will increase with input RF Power. To maintain maximum current consumption, external DC current limiting circuits are required on Vd line.

⁽⁷⁾ Maximum input power is specified based upon external Vd current limiting of 60mA. Maximum input power will degrade without external current limiting.

Notes

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.

B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.

C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Characterization Test Circuit

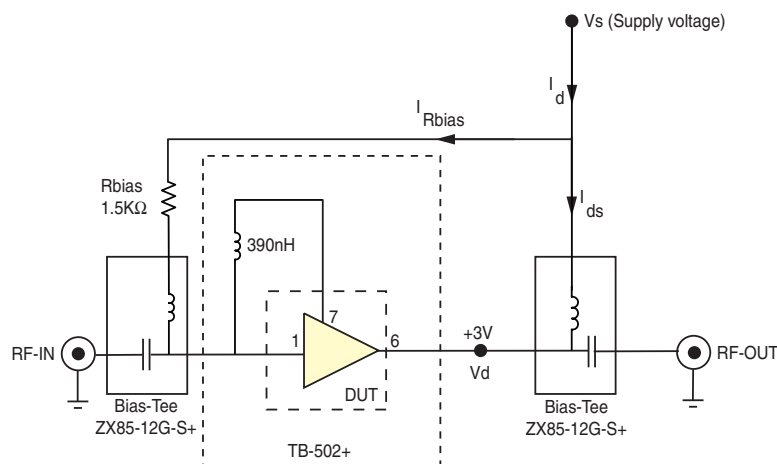


Fig 1. Block Diagram of Test Circuit used for characterization. (DUT soldered on Mini-Circuits Characterization Test Board TB-502+) Gain, Output power at 1dB compression (P1dB), Output IP3 (OIP3) and Noise Figure measured using Agilent's N5242A PNA-X Microwave network analyzer.

Conditions:

1. Gain: $P_{in} = -25$ dBm
2. Output IP3 (OIP3): Two tones, spaced 1 MHz apart, 5 dBm/tone at output.
3. V_s adjusted for 3V at device (V_d), compensating loss of bias tee.

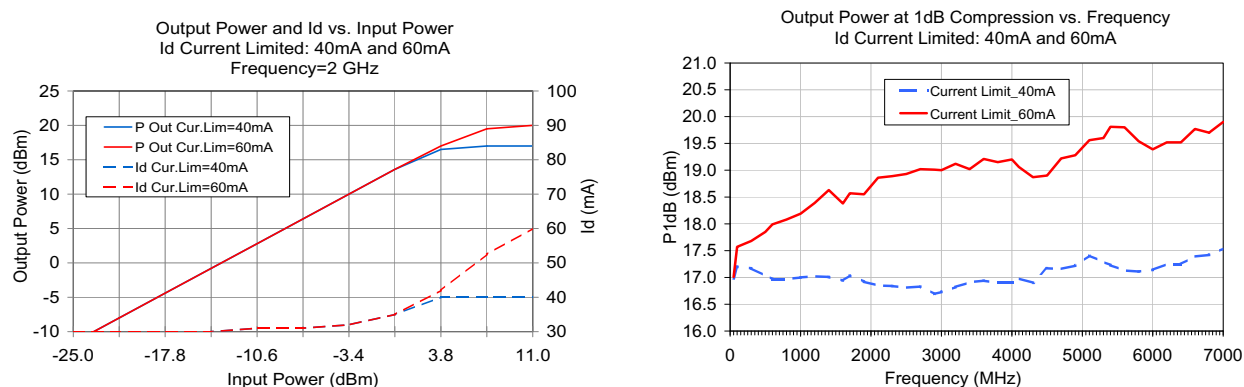


Fig 2. Output Power and Id vs. Input Power and Frequency. Performance measured on Mini-Circuits Characterization test board TB-502+. See Characterization Test Circuit (Fig. 1) Measurements performed with current (I_d) limited as noted.

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Recommended Application Circuit

(refer to evaluation board for PCB Layout and component values)

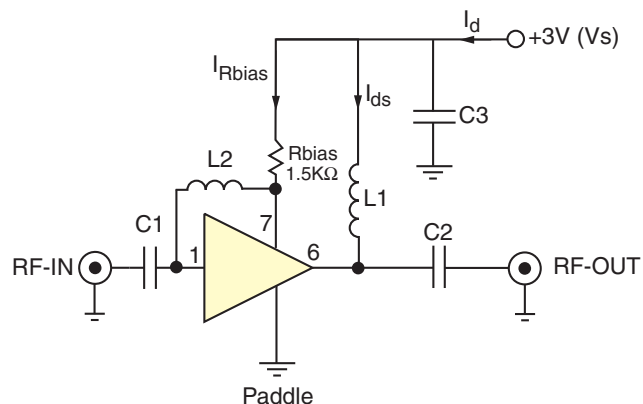


Fig 3. Recommended Application Circuit
Note: Resistance of L1, 0.1-0.2Ω typically

Typical Current (I_d) as a function of R_{bias}
($V_d = 3V$)

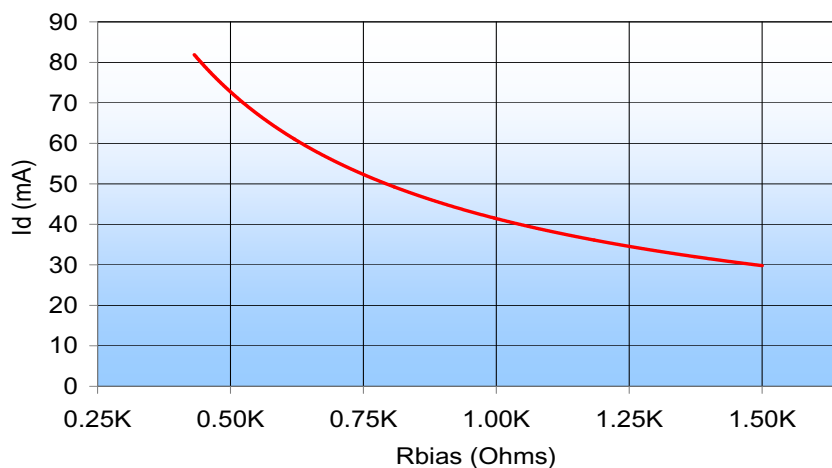



Fig 4. I_d varies as a function of R_{bias} . The I_d current range is defined based upon the specific R_{bias} value noted in the Application Circuit (Fig 3). R_{bias} may be adjusted to optimize I_d for a customers' application. RF performance will vary accordingly.

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Product Marking

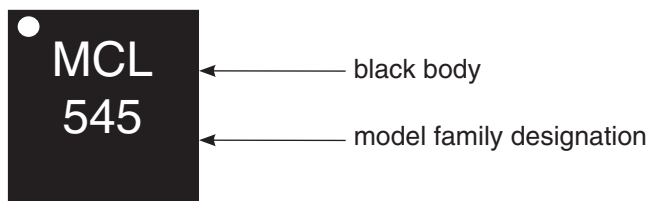

Marking may contain other features or characters for internal lot control

Additional Detailed Technical Information

Additional information is available on our web site www.minicircuits.com. To access this information enter the model number on our web site home page.

Performance data, graphs, s-parameter data set (.zip file)

Case Style: DQ849

Plastic package, exposed paddle, lead finish: tin-silver over nickel

Tape & Reel: F104

Standard quantities available on reel: 7" reels with 20, 50, 100, 200, 500, 1K, or 2K devices.

Suggested Layout for PCB Design: PL-299

Evaluation Board: TB-501-1+ (50-5000 MHz)

Environmental Ratings: ENV08T1

ESD Rating


Human Body Model (HBM): Class 1A (250V to <500V) in accordance with ANSI/ESD STM 5.1 - 2001

Machine Model (MM): Class M1 (<100V) in accordance with ANSI/ESD STM5.2-1999; passes 40V

MSL Rating

Moisture Sensitivity: MSL1 in accordance with IPC/JEDEC J-STD-020D

MSL Test Flow Chart

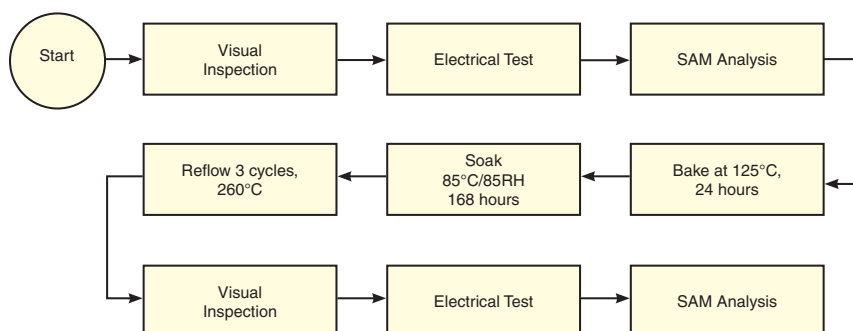

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
 C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Typical Performance Data

NOTE: Use PDF Bookmarks to view DATA at required conditions

Definitions:

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 3V, Rbias=1.5K ohms, Id=29 mA @ Temperature = +25degC

FREQ	Gain	Isolation	Input Return Loss	Output Return Loss	Stability		IP-3 Output	1dB Comp. Output (1)		Noise Figure
								Current Limit 40mA	Current Limit 60mA	
(MHz)	(dB)	(dB)	(dB)	(dB)	K	Measure	(dBm)	(dBm)		(dB)
50.0	24.37	30.19	9.69	10.20	1.09	0.70	27.58	16.98	17.01	1.10
100.0	24.40	29.66	9.31	14.14	1.07	0.76	27.58	17.20	17.57	0.80
300.0	23.48	28.37	8.46	18.27	1.01	0.82	28.05	17.17	17.68	0.68
500.0	22.07	27.30	7.60	20.14	0.99	0.90	27.70	17.03	17.85	0.59
600.0	21.33	26.83	7.27	20.97	0.99	0.94	28.45	16.97	17.99	0.68
800.0	19.88	25.84	6.76	22.42	1.00	0.99	29.01	16.97	18.08	0.68
1000.0	18.54	25.01	6.45	23.64	1.02	1.02	29.38	17.00	18.19	0.76
1200.0	17.32	24.16	6.17	24.48	1.04	1.05	30.38	17.02	18.39	0.85
1400.0	16.25	23.35	6.02	24.80	1.05	1.06	29.85	17.01	18.63	0.79
1600.0	15.26	22.63	5.86	24.74	1.07	1.08	30.25	16.94	18.38	0.90
1700.0	14.79	22.30	5.78	24.88	1.08	1.09	30.30	17.04	18.57	0.99
1900.0	13.99	21.61	5.78	24.61	1.09	1.09	30.77	16.92	18.55	0.93
2100.0	13.22	20.98	5.70	24.47	1.10	1.09	30.88	16.85	18.86	0.92
2300.0	12.55	20.38	5.70	24.64	1.10	1.10	30.86	16.84	18.89	1.11
2500.0	11.86	19.90	5.95	25.98	1.14	1.09	31.02	16.81	18.93	1.10
2700.0	11.15	19.38	5.62	23.06	1.13	1.11	30.95	16.83	19.02	1.35
2900.0	10.77	18.69	5.80	24.57	1.12	1.09	31.40	16.69	19.01	1.22
3000.0	10.52	18.45	5.90	24.92	1.13	1.09	31.33	16.73	19.00	1.12
3200.0	10.04	17.93	5.96	25.02	1.13	1.08	31.60	16.82	19.12	1.20
3400.0	9.61	17.43	6.18	25.75	1.14	1.07	31.39	16.91	19.02	1.18
3600.0	9.21	16.99	6.36	25.49	1.15	1.06	31.33	16.94	19.21	1.34
3800.0	8.83	16.54	6.48	25.23	1.15	1.05	31.39	16.90	19.15	1.54
4000.0	8.48	16.10	6.73	24.65	1.15	1.04	31.18	16.90	19.20	1.33
4100.0	8.26	15.94	6.78	23.96	1.16	1.03	31.49	16.98	19.06	1.49
4300.0	7.82	15.60	6.90	23.04	1.18	1.03	30.55	16.90	18.87	1.62
4500.0	7.49	15.18	7.10	22.49	1.18	1.01	30.67	17.17	18.90	1.61
4700.0	7.04	14.94	7.39	21.59	1.22	1.00	30.66	17.16	19.22	1.89
4900.0	6.81	14.53	6.90	21.62	1.18	1.01	31.89	17.22	19.28	1.64
5100.0	6.61	14.13	6.73	21.05	1.16	1.01	32.38	17.41	19.56	1.82
5300.0	6.33	13.84	6.53	20.43	1.15	1.01	32.37	17.29	19.60	1.75
5400.0	6.19	13.67	6.47	19.86	1.15	1.01	31.76	17.23	19.81	1.78
5600.0	5.91	13.41	6.34	18.84	1.14	1.01	32.02	17.13	19.80	1.53
5800.0	5.62	13.17	6.17	17.92	1.14	1.01	32.44	17.11	19.54	2.02
6000.0	5.34	12.91	5.93	17.22	1.13	1.02	32.56	17.14	19.39	2.08
6200.0	5.06	12.72	5.68	16.43	1.13	1.02	32.53	17.25	19.52	2.22
6400.0	4.78	12.52	5.47	15.92	1.12	1.03	32.25	17.25	19.52	2.47
6600.0	4.47	12.35	5.31	15.10	1.12	1.03	32.11	17.39	19.77	2.23
6800.0	4.12	12.26	5.14	14.51	1.14	1.04	32.31	17.42	19.70	2.75
7000.0	3.62	12.29	5.52	13.79	1.21	1.02	32.54	17.54	19.90	2.99

(1) Current is externally limited during P1dB measurements. Unit is capable of higher output power if current is not limited.

Typical Performance Data

Definitions:

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 3V, Rbias=1.5K ohms, Id=30 mA @ Temperature = -45degC

FREQ	Gain	Isolation	Input Return Loss	Output Return Loss	Stability		IP-3 Output	Noise Figure
(MHz)	(dB)	(dB)	(dB)	(dB)	K	Measure	(dBm)	(dB)
50.0	24.77	29.72	10.97	10.86	1.04	0.66	27.85	0.90
100.0	24.59	29.34	10.99	15.97	1.05	0.73	28.27	0.60
300.0	23.65	28.44	9.76	22.90	1.04	0.79	28.83	0.63
500.0	22.30	27.60	8.45	24.60	1.04	0.87	28.52	0.43
600.0	21.59	27.12	7.97	25.12	1.04	0.90	29.31	0.48
800.0	20.18	26.14	7.28	25.34	1.04	0.94	29.94	0.49
1000.0	18.87	25.19	6.82	25.13	1.05	0.98	30.41	0.51
1200.0	17.68	24.33	6.47	24.49	1.06	1.00	31.31	0.62
1400.0	16.61	23.47	6.26	24.12	1.07	1.02	30.77	0.65
1600.0	15.63	22.68	6.05	23.35	1.08	1.03	31.18	0.64
1700.0	15.18	22.32	5.96	23.41	1.08	1.04	31.23	0.88
1900.0	14.37	21.60	5.91	22.95	1.09	1.04	31.66	0.64
2100.0	13.62	20.89	5.80	22.87	1.09	1.05	31.79	0.63
2300.0	12.96	20.26	5.80	22.86	1.09	1.05	31.83	0.79
2500.0	12.25	19.80	6.05	23.91	1.13	1.05	31.97	0.80
2700.0	11.45	19.33	5.69	21.81	1.12	1.09	31.98	1.12
2900.0	11.19	18.51	5.85	23.06	1.09	1.05	32.34	0.85
3000.0	10.94	18.24	5.96	23.51	1.10	1.04	32.27	0.75
3200.0	10.48	17.71	6.06	23.85	1.10	1.04	32.64	0.85
3400.0	10.05	17.21	6.25	24.65	1.10	1.03	32.38	0.81
3600.0	9.65	16.73	6.43	24.85	1.11	1.01	32.31	0.91
3800.0	9.27	16.26	6.54	25.09	1.10	1.01	32.30	0.94
4000.0	8.93	15.84	6.81	24.88	1.11	0.99	32.15	1.02
4100.0	8.72	15.66	6.84	24.33	1.11	0.99	32.46	0.85
4300.0	8.29	15.32	6.94	22.98	1.13	0.99	31.52	0.99
4500.0	7.96	14.90	7.11	22.33	1.13	0.97	31.45	0.81
4700.0	7.54	14.62	7.31	20.84	1.16	0.96	31.58	1.28
4900.0	7.16	14.33	7.03	20.42	1.16	0.97	32.76	1.34
5100.0	7.03	13.88	6.72	19.90	1.12	0.96	33.39	1.32
5300.0	6.77	13.56	6.50	19.33	1.11	0.96	33.46	1.09
5400.0	6.61	13.44	6.40	18.66	1.11	0.97	32.69	1.26
5600.0	6.34	13.16	6.29	17.90	1.10	0.96	33.10	1.36
5800.0	6.05	12.90	6.14	17.02	1.10	0.96	33.41	1.41
6000.0	5.78	12.68	5.92	16.49	1.09	0.97	33.61	1.57
6200.0	5.49	12.46	5.64	15.69	1.08	0.97	33.53	1.44
6400.0	5.22	12.25	5.43	15.19	1.08	0.98	33.29	1.46
6600.0	4.92	12.10	5.21	14.40	1.08	0.98	33.14	1.49
6800.0	4.61	11.95	4.99	13.97	1.08	1.00	33.17	2.08
7000.0	4.17	11.94	5.13	13.10	1.12	0.99	33.49	1.98

*Typical Performance Data***Definitions:**

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 3V, Rbias=1.5K ohms, Id=28 mA @ Temperature = +85degC

FREQ	Gain	Isolation	Input Return Loss	Output Return Loss	Stability		IP-3 Output	Noise Figure
(MHz)	(dB)	(dB)	(dB)	(dB)	K	Measure	(dBm)	(dB)
50.0	23.86	30.27	8.70	9.20	1.10	0.71	27.19	1.30
100.0	24.05	29.62	7.96	12.02	1.06	0.76	26.91	1.10
300.0	23.18	28.30	7.41	14.83	0.98	0.85	27.38	0.76
500.0	21.76	27.05	6.87	16.42	0.94	0.93	26.97	0.76
600.0	21.02	26.55	6.66	17.37	0.94	0.97	27.73	0.85
800.0	19.54	25.54	6.33	18.82	0.95	1.02	28.32	0.85
1000.0	18.21	24.67	6.13	20.37	0.98	1.05	28.60	0.97
1200.0	16.99	23.97	5.93	21.68	1.01	1.08	29.71	1.01
1400.0	15.92	23.22	5.83	22.67	1.03	1.10	29.10	1.14
1600.0	14.93	22.54	5.71	23.40	1.06	1.11	29.56	0.95
1700.0	14.46	22.25	5.64	23.66	1.07	1.12	29.58	1.04
1900.0	13.65	21.61	5.64	23.88	1.09	1.12	30.11	1.09
2100.0	12.88	21.00	5.57	24.32	1.10	1.13	30.16	1.17
2300.0	12.20	20.44	5.60	24.42	1.11	1.13	30.20	1.44
2500.0	11.52	19.97	5.81	25.44	1.15	1.12	30.41	1.32
2700.0	10.81	19.48	5.56	23.04	1.15	1.14	30.37	1.72
2900.0	10.42	18.86	5.74	24.35	1.15	1.13	30.76	1.56
3000.0	10.15	18.61	5.84	24.57	1.15	1.12	30.67	1.53
3200.0	9.67	18.15	5.91	24.61	1.16	1.12	30.93	1.62
3400.0	9.23	17.67	6.12	25.14	1.18	1.10	30.77	1.66
3600.0	8.82	17.24	6.30	24.63	1.19	1.09	30.72	1.67
3800.0	8.44	16.77	6.43	24.12	1.19	1.08	30.68	1.74
4000.0	8.08	16.36	6.66	23.51	1.20	1.07	30.58	1.84
4100.0	7.86	16.19	6.69	23.01	1.20	1.07	30.83	1.88
4300.0	7.42	15.89	6.84	22.25	1.23	1.06	30.02	1.95
4500.0	7.10	15.47	7.01	22.23	1.23	1.05	30.13	1.91
4700.0	6.66	15.20	7.28	21.76	1.27	1.04	30.22	2.27
4900.0	6.42	14.80	6.88	21.88	1.23	1.05	31.27	2.36
5100.0	6.21	14.43	6.68	21.43	1.21	1.05	31.70	2.26
5300.0	5.95	14.09	6.48	20.77	1.19	1.05	31.65	2.39
5400.0	5.82	13.96	6.46	20.48	1.19	1.05	31.14	2.38
5600.0	5.55	13.65	6.34	19.45	1.18	1.05	31.45	2.67
5800.0	5.25	13.41	6.12	18.55	1.18	1.05	31.84	2.60
6000.0	4.97	13.15	5.94	17.60	1.17	1.05	31.93	2.74
6200.0	4.69	12.96	5.72	16.98	1.16	1.06	31.86	2.74
6400.0	4.42	12.76	5.53	16.57	1.16	1.07	33.34	2.69
6600.0	4.11	12.59	5.36	15.77	1.16	1.07	31.48	3.16
6800.0	3.76	12.49	5.23	15.27	1.18	1.08	31.73	3.17
7000.0	3.29	12.48	5.51	14.38	1.25	1.06	31.80	3.52

Typical Performance Data

Definitions:

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 3V, Id=20mA @ Temperature = +25degC (1)

FREQ	Gain	Isolation	Input Return Loss	Output Return Loss	Stability		IP-3 Output	1dB Comp. Output (2)		FREQ	Noise Figure
								Current Limit 40mA	Current Limit 60mA		
(MHz)	(dB)	(dB)	(dB)	(dB)	K	Measure	(dBm)	(dBm)		(MHz)	(dB)
50.0	23.04	29.50	9.00	8.35	1.11	0.66	24.74	16.98	17.01	50.0	1.11
100.0	23.27	28.88	8.37	11.16	1.07	0.73	24.75	17.20	17.57	100.0	0.84
300.0	22.57	27.66	7.56	13.68	0.99	0.81	24.67	17.17	17.68	400.0	0.69
500.0	21.34	26.55	6.93	15.32	0.94	0.91	24.76	17.03	17.85	600.0	0.72
600.0	20.66	26.01	6.64	16.22	0.93	0.95	25.01	16.97	17.99	800.0	0.78
800.0	19.30	25.21	6.22	17.98	0.94	1.02	25.34	16.97	18.08	1100.0	0.86
1000.0	18.02	24.44	5.92	19.73	0.96	1.06	25.48	17.00	18.19	1300.0	0.90
1200.0	16.85	23.72	5.71	21.35	0.98	1.10	26.49	17.02	18.39	1600.0	0.97
1400.0	15.79	23.13	5.55	22.89	1.01	1.12	26.08	17.01	18.63	1800.0	1.14
1600.0	14.84	22.46	5.45	24.05	1.03	1.14	26.54	16.94	18.38	2000.0	0.97
1700.0	14.39	22.16	5.39	24.63	1.04	1.14	27.22	17.04	18.57	2300.0	1.06
1900.0	13.59	21.58	5.37	25.12	1.06	1.15	26.52	16.92	18.55	2500.0	1.17
2100.0	12.85	20.99	5.35	25.70	1.07	1.15	26.11	16.85	18.86	2700.0	1.67
2300.0	12.20	20.44	5.38	25.91	1.09	1.15	26.59	16.84	18.89	3000.0	1.25
2500.0	11.60	19.87	5.47	25.88	1.10	1.15	26.95	16.81	18.93	3200.0	1.36
2700.0	10.76	19.63	5.34	22.93	1.13	1.18	27.07	16.83	19.02	3400.0	1.46
2900.0	10.51	18.82	5.51	25.20	1.11	1.14	26.99	16.69	19.01	3700.0	1.39
3000.0	10.29	18.56	5.59	25.12	1.11	1.14	27.30	16.73	19.00	3900.0	1.64
3200.0	9.86	18.07	5.71	24.75	1.11	1.13	26.92	16.82	19.12	4100.0	1.59
3400.0	9.45	17.56	5.85	24.42	1.11	1.12	27.88	16.91	19.02	4400.0	1.73
3600.0	9.06	17.10	5.97	24.09	1.12	1.11	27.92	16.94	19.21	4600.0	1.85
3800.0	8.69	16.65	6.10	23.59	1.12	1.09	27.71	16.90	19.15	4900.0	2.17
4000.0	8.32	16.24	6.19	22.88	1.12	1.09	26.78	16.90	19.20	5100.0	1.97
4100.0	8.13	16.07	6.23	22.38	1.13	1.08	27.42	16.98	19.06	5300.0	1.96
4300.0	7.72	15.75	6.18	21.41	1.14	1.08	26.40	16.90	18.87	5600.0	2.15
4500.0	7.41	15.38	6.15	20.96	1.13	1.08	27.59	17.17	18.90	5800.0	2.32
4700.0	7.07	15.04	6.24	20.40	1.15	1.07	27.07	17.16	19.22	6000.0	2.37
4900.0	6.52	14.89	6.55	19.96	1.21	1.06	27.66	17.22	19.28	6400.0	2.68
5100.0	6.43	14.36	5.79	19.64	1.12	1.08	27.63	17.41	19.56	6600.0	2.60
5300.0	6.17	14.06	5.59	18.92	1.11	1.08	28.02	17.29	19.60	6800.0	2.80
5400.0	6.03	13.91	5.51	18.50	1.10	1.08	27.18	17.23	19.81	7000.0	2.69
5600.0	5.74	13.64	5.35	17.78	1.10	1.08	27.69	17.13	19.80		
5800.0	5.44	13.38	5.18	17.16	1.09	1.09	28.72	17.11	19.54		
6000.0	5.14	13.17	5.08	16.54	1.09	1.09	28.26	17.14	19.39		
6200.0	4.88	12.92	4.87	15.99	1.08	1.10	27.30	17.25	19.52		
6400.0	4.61	12.70	4.69	15.54	1.07	1.10	27.73	17.25	19.52		
6600.0	4.33	12.50	4.56	15.08	1.07	1.11	28.58	17.39	19.77		
6800.0	4.04	12.33	4.44	14.67	1.07	1.11	28.19	17.42	19.70		
7000.0	3.68	12.26	4.42	14.16	1.09	1.11	28.15	17.54	19.90		

(1) External Rbias resistor is adjusted to obtain desired current

(2) Current is externally limited during P1dB measurements. Unit is capable of higher output power if current is not limited.

Typical Performance Data

Definitions:

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 3V, Id=30mA @ Temperature = +25degC (1)

FREQ	Gain	Isolation	Input Return Loss	Output Return Loss	Stability		IP-3 Output	1dB Comp. Output (2)		FREQ	Noise Figure
								Current Limit 40mA	Current Limit 60mA		
(MHz)	(dB)	(dB)	(dB)	(dB)	K	Measure	(dBm)	(dBm)		(MHz)	(dB)
50.0	24.28	30.23	9.58	9.98	1.09	0.70	27.17	16.98	17.01	50.0	1.04
100.0	24.36	29.65	9.39	13.82	1.07	0.75	27.26	17.20	17.57	100.0	0.79
300.0	23.49	28.50	8.37	17.69	1.01	0.83	27.46	17.17	17.68	400.0	0.65
500.0	22.12	27.36	7.46	19.83	0.98	0.90	27.87	17.03	17.85	600.0	0.70
600.0	21.39	26.84	7.08	20.91	0.98	0.94	28.17	16.97	17.99	800.0	0.74
800.0	19.94	25.92	6.55	23.00	0.99	1.00	28.71	16.97	18.08	1100.0	0.81
1000.0	18.60	25.01	6.21	24.91	1.01	1.03	28.94	17.00	18.19	1300.0	0.86
1200.0	17.39	24.23	5.96	26.26	1.03	1.06	29.98	17.02	18.39	1600.0	0.93
1400.0	16.30	23.45	5.79	27.12	1.05	1.08	29.68	17.01	18.63	1800.0	1.04
1600.0	15.33	22.69	5.68	27.27	1.06	1.09	30.16	16.94	18.38	2000.0	0.90
1700.0	14.88	22.36	5.63	27.33	1.07	1.09	30.87	17.04	18.57	2300.0	1.05
1900.0	14.06	21.67	5.60	26.62	1.08	1.10	30.22	16.92	18.55	2500.0	1.11
2100.0	13.32	21.01	5.58	26.63	1.09	1.10	29.84	16.85	18.86	2700.0	1.57
2300.0	12.65	20.37	5.61	26.89	1.09	1.10	30.31	16.84	18.89	3000.0	1.13
2500.0	12.04	19.76	5.71	26.95	1.10	1.09	30.77	16.81	18.93	3200.0	1.18
2700.0	11.18	19.46	5.57	23.77	1.13	1.12	30.79	16.83	19.02	3400.0	1.29
2900.0	10.94	18.64	5.75	25.55	1.10	1.09	30.80	16.69	19.01	3700.0	1.25
3000.0	10.71	18.37	5.82	25.57	1.10	1.08	31.12	16.73	19.00	3900.0	1.37
3200.0	10.28	17.82	5.95	25.55	1.10	1.07	30.73	16.82	19.12	4100.0	1.46
3400.0	9.86	17.31	6.09	25.46	1.10	1.06	31.67	16.91	19.02	4400.0	1.61
3600.0	9.47	16.83	6.21	25.14	1.10	1.05	31.70	16.94	19.21	4600.0	1.66
3800.0	9.08	16.37	6.35	24.63	1.11	1.04	31.51	16.90	19.15	4900.0	1.99
4000.0	8.71	15.95	6.43	23.78	1.11	1.03	30.50	16.90	19.20	5100.0	1.89
4100.0	8.51	15.76	6.46	23.20	1.11	1.03	31.22	16.98	19.06	5300.0	1.75
4300.0	8.10	15.43	6.43	21.75	1.12	1.03	30.18	16.90	18.87	5600.0	1.93
4500.0	7.78	15.06	6.38	20.88	1.11	1.02	31.38	17.17	18.90	5800.0	2.18
4700.0	7.43	14.73	6.48	20.00	1.13	1.01	30.84	17.16	19.22	6000.0	2.24
4900.0	6.89	14.58	6.76	19.14	1.18	1.00	31.40	17.22	19.28	6400.0	2.34
5100.0	6.79	14.04	6.00	18.87	1.10	1.02	31.34	17.41	19.56	6600.0	2.56
5300.0	6.52	13.74	5.79	18.15	1.09	1.02	31.76	17.29	19.60	6800.0	2.68
5400.0	6.38	13.59	5.71	17.77	1.09	1.02	30.79	17.23	19.81	7000.0	2.88
5600.0	6.09	13.34	5.54	17.06	1.08	1.02	31.39	17.13	19.80		
5800.0	5.80	13.08	5.36	16.39	1.07	1.03	32.51	17.11	19.54		
6000.0	5.49	12.87	5.26	15.81	1.08	1.03	32.01	17.14	19.39		
6200.0	5.22	12.66	5.05	15.28	1.07	1.03	31.20	17.25	19.52		
6400.0	4.95	12.42	4.86	14.82	1.06	1.04	31.14	17.25	19.52		
6600.0	4.67	12.23	4.73	14.35	1.06	1.04	32.35	17.39	19.77		
6800.0	4.38	12.07	4.60	13.93	1.06	1.04	31.48	17.42	19.70		
7000.0	4.02	12.00	4.58	13.40	1.08	1.04	32.75	17.54	19.90		

(1) External Rbias resistor is adjusted to obtain desired current

(2) Current is externally limited during P1dB measurements. Unit is capable of higher output power if current is not limited.

Typical Performance Data

Definitions:

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 3V, Id=40mA @ Temperature = +25degC (1)


FREQ	Gain	Isolation	Input Return Loss	Output Return Loss	Stability		IP-3 Output	1dB Comp. Output (2)		FREQ	Noise Figure
								Current Limit 40mA	Current Limit 60mA		
(MHz)	(dB)	(dB)	(dB)	(dB)	K	Measure	(dBm)	(dBm)		(MHz)	(dB)
50.0	25.04	30.64	10.27	10.94	1.09	0.70	29.36	16.98	17.01	50.0	1.02
100.0	25.02	30.24	10.20	15.66	1.08	0.76	29.45	17.20	17.57	100.0	0.74
300.0	24.04	29.05	8.95	21.17	1.03	0.82	29.85	17.17	17.68	400.0	0.64
500.0	22.59	27.97	7.82	23.62	1.02	0.90	30.42	17.03	17.85	600.0	0.66
600.0	21.82	27.37	7.38	24.57	1.01	0.93	30.80	16.97	17.99	800.0	0.73
800.0	20.32	26.35	6.77	25.94	1.02	0.98	31.43	16.97	18.08	1100.0	0.79
1000.0	18.95	25.42	6.40	26.46	1.04	1.01	31.69	17.00	18.19	1300.0	0.84
1200.0	17.71	24.49	6.14	26.14	1.05	1.03	32.80	17.02	18.39	1600.0	0.91
1400.0	16.61	23.64	5.96	25.71	1.06	1.05	32.51	17.01	18.63	1800.0	1.04
1600.0	15.63	22.83	5.84	25.07	1.07	1.06	33.04	16.94	18.38	2000.0	0.86
1700.0	15.17	22.45	5.78	24.93	1.08	1.06	33.82	17.04	18.57	2300.0	0.97
1900.0	14.34	21.73	5.75	24.28	1.09	1.06	33.16	16.92	18.55	2500.0	0.99
2100.0	13.59	21.01	5.74	24.23	1.09	1.06	32.84	16.85	18.86	2700.0	1.54
2300.0	12.92	20.33	5.76	24.37	1.09	1.06	33.46	16.84	18.89	3000.0	1.11
2500.0	12.31	19.68	5.87	24.60	1.10	1.05	33.85	16.81	18.93	3200.0	1.17
2700.0	11.44	19.36	5.72	22.78	1.12	1.09	33.87	16.83	19.02	3400.0	1.31
2900.0	11.20	18.52	5.91	23.65	1.10	1.05	34.01	16.69	19.01	3700.0	1.24
3000.0	10.97	18.24	5.99	23.82	1.10	1.04	34.31	16.73	19.00	3900.0	1.39
3200.0	10.53	17.71	6.12	24.04	1.10	1.03	33.96	16.82	19.12	4100.0	1.57
3400.0	10.10	17.15	6.27	24.09	1.10	1.02	35.06	16.91	19.02	4400.0	1.60
3600.0	9.71	16.67	6.39	24.04	1.10	1.01	34.88	16.94	19.21	4600.0	1.64
3800.0	9.32	16.21	6.53	23.80	1.10	1.00	34.79	16.90	19.15	4900.0	2.01
4000.0	8.94	15.79	6.60	23.11	1.10	0.99	33.95	16.90	19.20	5100.0	1.75
4100.0	8.74	15.60	6.63	22.59	1.10	0.99	34.68	16.98	19.06	5300.0	1.76
4300.0	8.34	15.25	6.59	21.24	1.10	0.99	33.55	16.90	18.87	5600.0	1.88
4500.0	8.01	14.88	6.56	20.24	1.10	0.98	34.89	17.17	18.90	5800.0	2.06
4700.0	7.65	14.57	6.64	19.32	1.12	0.97	34.46	17.16	19.22	6000.0	2.19
4900.0	7.11	14.40	6.91	18.34	1.16	0.97	34.84	17.22	19.28	6400.0	2.26
5100.0	7.01	13.89	6.14	18.17	1.09	0.98	34.68	17.41	19.56	6600.0	2.49
5300.0	6.74	13.58	5.92	17.45	1.08	0.98	35.34	17.29	19.60	6800.0	2.70
5400.0	6.60	13.42	5.84	17.10	1.08	0.98	34.10	17.23	19.81	7000.0	2.90
5600.0	6.30	13.16	5.67	16.44	1.07	0.98	34.97	17.13	19.80		
5800.0	6.01	12.92	5.49	15.81	1.07	0.98	36.20	17.11	19.54		
6000.0	5.70	12.72	5.38	15.25	1.07	0.99	35.53	17.14	19.39		
6200.0	5.43	12.49	5.16	14.76	1.06	0.99	34.63	17.25	19.52		
6400.0	5.16	12.26	4.98	14.29	1.05	1.00	35.17	17.25	19.52		
6600.0	4.88	12.09	4.83	13.83	1.05	1.00	35.99	17.39	19.77		
6800.0	4.59	11.93	4.71	13.43	1.06	1.00	34.91	17.42	19.70		
7000.0	4.23	11.86	4.68	12.89	1.08	1.00	34.78	17.54	19.90		

(1) External Rbias resistor is adjusted to obtain desired current


(2) Current is externally limited during P1dB measurements. Unit is capable of higher output power if current is not limited.

Typical Performance Curves


GAIN vs. FREQUENCY & TEMPERATURE
Vd = 3V, Rbias=1.5K Ohms

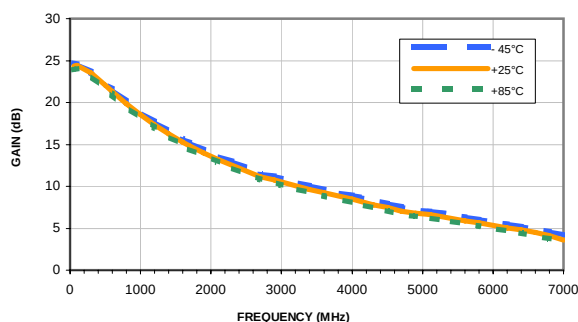


NOISE FIGURE vs. FREQUENCY & TEMPERATURE
Vd = 3V, Rbias=1.5K Ohms

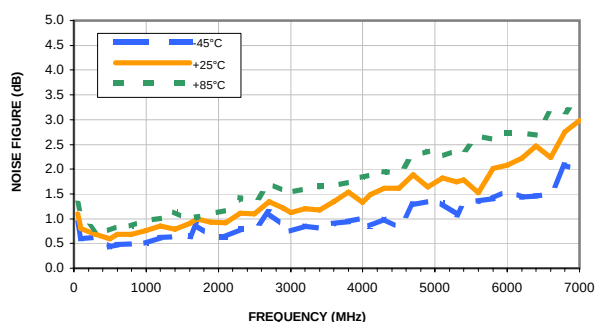


INPUT RETURN LOSS vs. FREQUENCY & TEMPERATURE
Vd = 3V, Rbias=1.5K Ohms

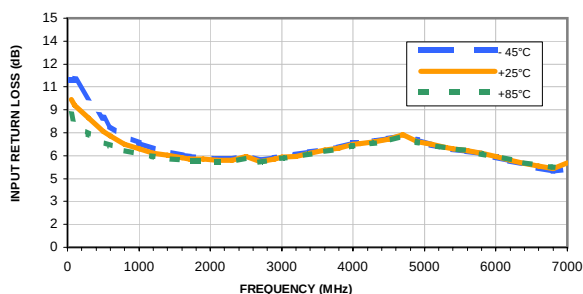


OUTPUT RETURN LOSS vs. FREQUENCY & TEMPERATURE
Vd = 3V, Rbias=1.5K Ohms

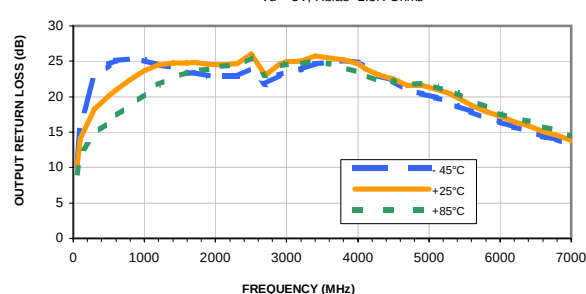







OUTPUT IP3 vs. FREQUENCY & TEMPERATURE
Vd = 3V, Rbias=1.5K Ohms

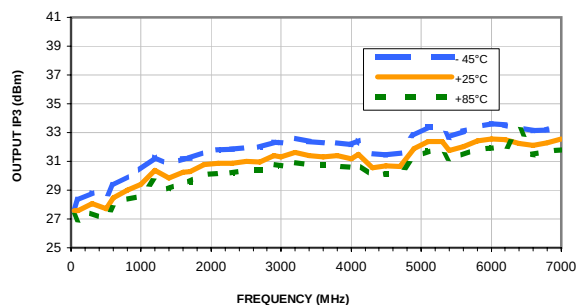

ISOLATION vs. FREQUENCY & TEMPERATURE
Vd = 3V, Rbias=1.5K Ohms

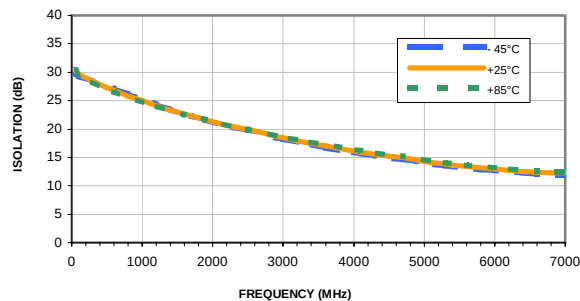


Typical Performance Curves

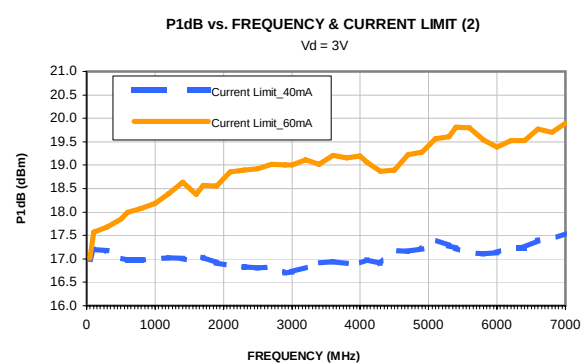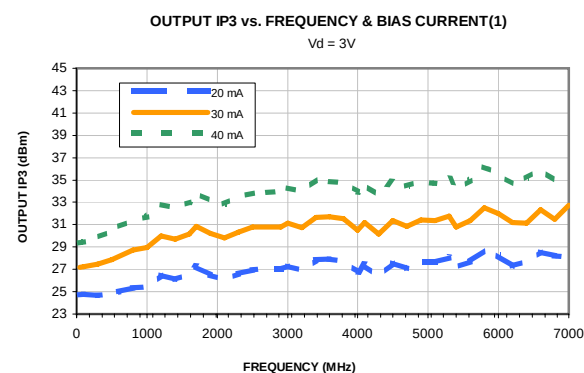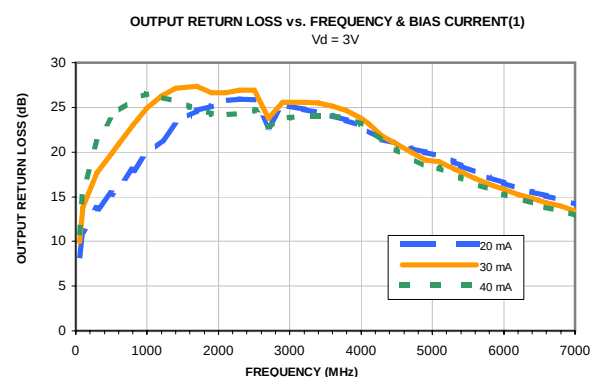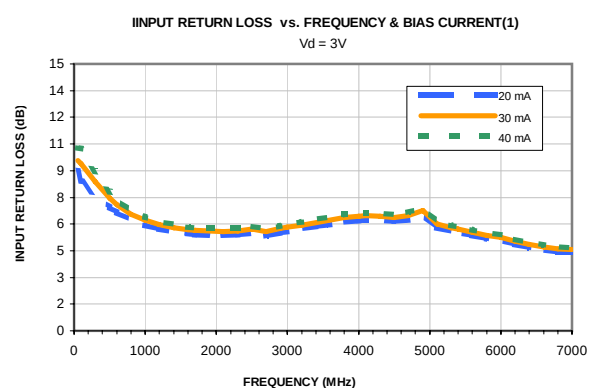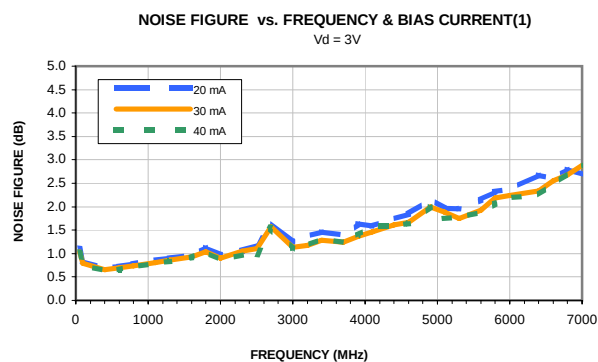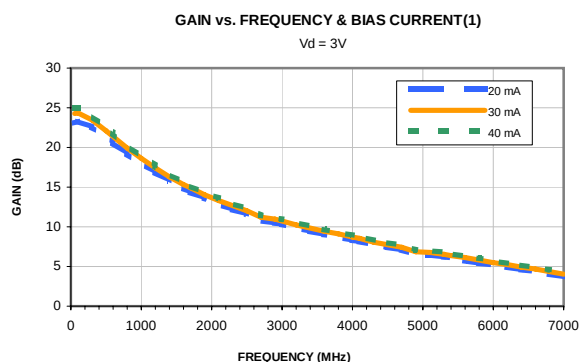


(1) External Rbias resistor is adjusted to obtain desired current

(2) Current is externally limited during P1dB measurements. Unit is capable of higher output power if current is not limited.

Outline Dimensions

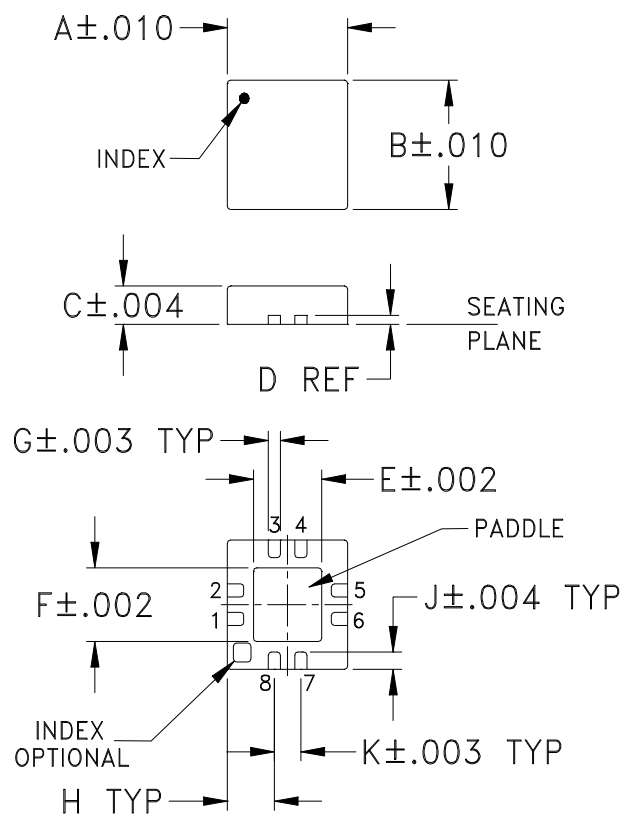

PCB Land Pattern

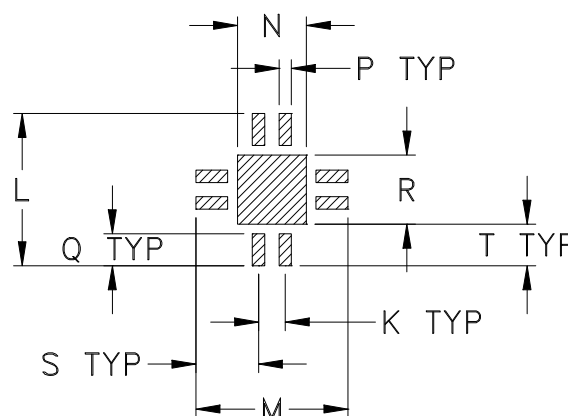

Suggested Layout,
Tolerance to be within $\pm.002$

CASE #	A	B	C	D	E	F	G	H	J	K	L	M	N
DQ849	.118 (3.00)	.118 (3.00)	.035 (0.89)	.008 (0.20)	.067 (1.70)	.067 (1.70)	.012 (0.30)	.046 (1.17)	.016 (0.41)	.026 (0.66)	.148 (3.76)	.148 (3.76)	.067 (1.70)

CASE #	P	Q	R	S	T	WT. GRAM
DQ849	.012 (0.30)	.031 (0.79)	.067 (1.70)	.061 (1.55)	.041 (1.04)	.02

Dimensions are in inches (mm). Tolerances: 2Pl. $\pm.01$; 3 Pl. $\pm.004$

Notes:

- Case material: Plastic.
- Termination finish:
For RoHS Case Styles: Tin-Silver alloy plate over Nickel barrier or Matte-Tin plated. All models, (+) suffix. See Data sheet.
For RoHS-5 Case Styles: Tin-Lead plate. All models, no (+) suffix.




INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

Tape & Reel Packaging TR-F104

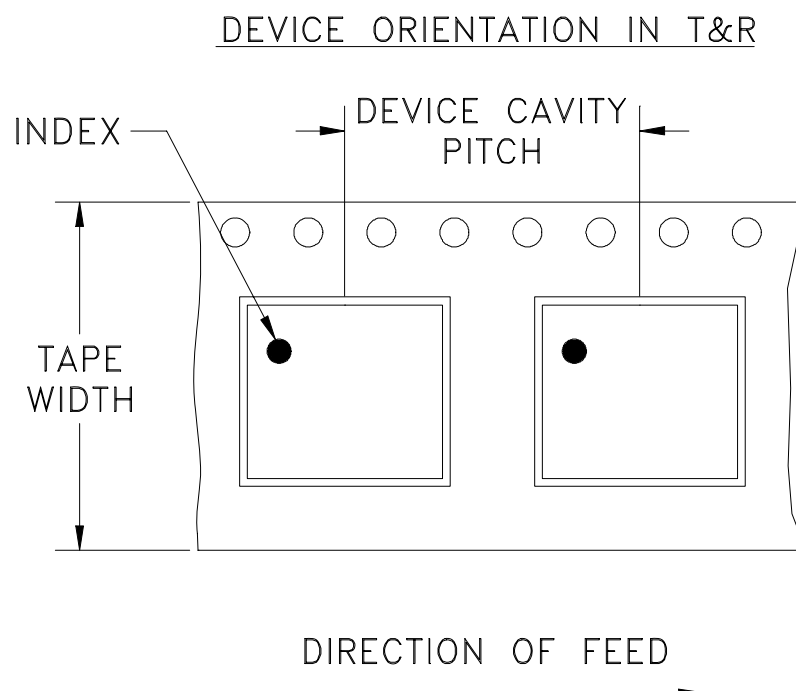

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel	
8	4	7	Small quantity standards (see note)	20
				50
				100
				200
				500
				1000
		7	Standard	2000

Note: Please Consult individual model data sheet to determine device per reel availability.

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf




INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified


THIRD ANGLE PROJECTION





REVISIONS

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M121752	NEW RELEASE	03/05/09	PW	TH
A	M129864	ADDED DIMENSIONS	12/14/10	MMG	MM
B	M137913	REMOVED COMPONENT VALUES	07/10/12	GF	DJ

**SUGGESTED MOUNTING CONFIGURATION FOR
DQ849 CASE STYLES
"08AM01" PIN CONNECTION**

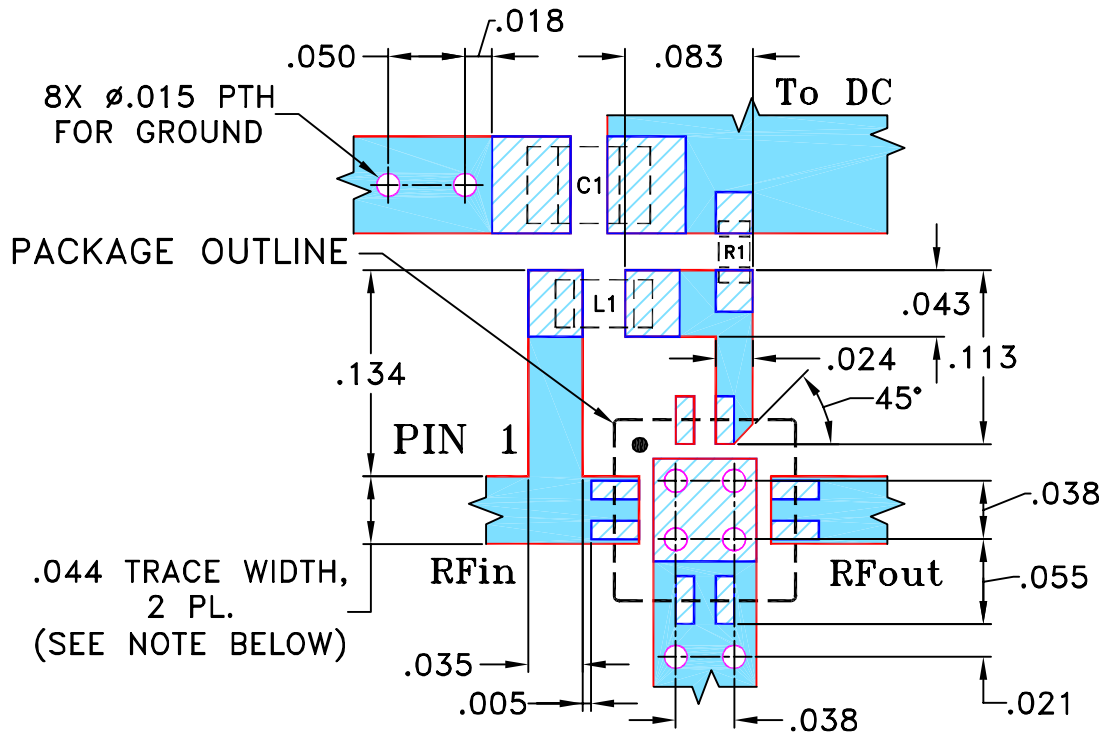

Evaluation Board and Circuit

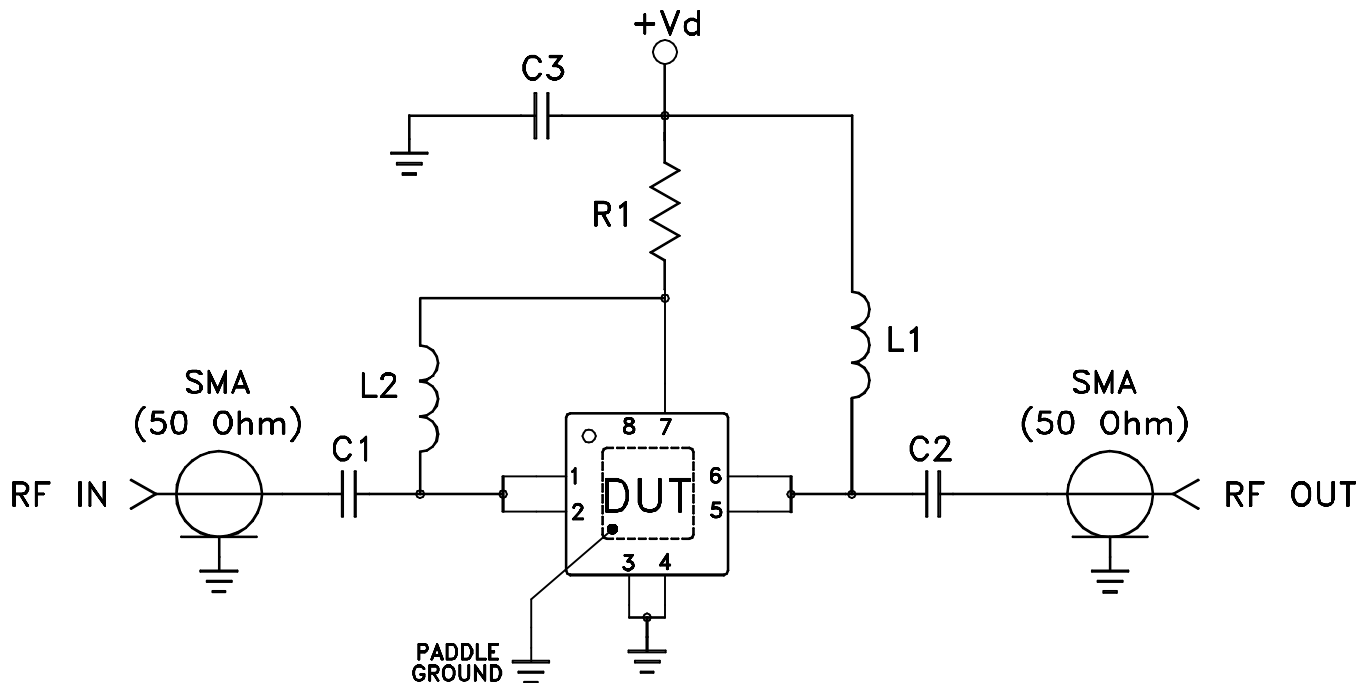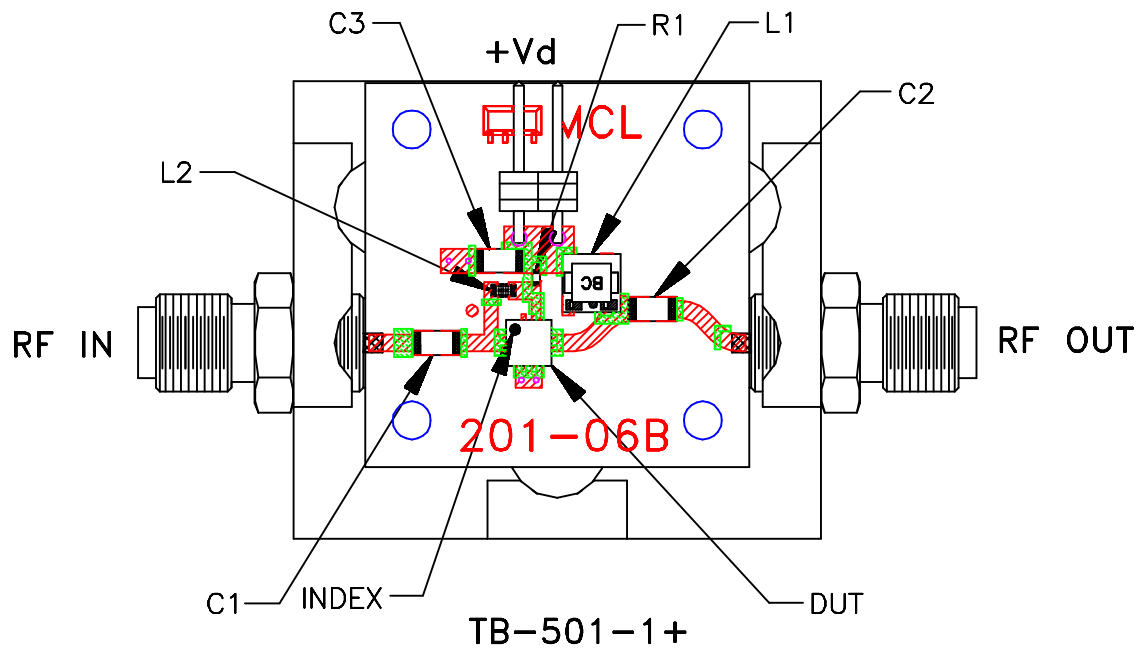

COMPONENT	VALUE/PART NUMBER
DUT	Mini-Circuits PMA-5451+
C1, C2, C3	0.1 μ F
L1	Mini-Circuits TCCH-80+
L2	390 nH
R1	1.5k Ohm

Notes:

- 50 Ohm SMA Female connectors.
- PCB Material: R04350 or equivalent,
Dielectric Constant=3.5, Thickness=.020 inch.

Schematic Diagram

 **Mini-Circuits®**



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-40° to 85°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C or -65° to 150° Ambient Environment	Individual Model Data Sheet
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Mechanical Shock	1.5Kg, 0.5 ms, 5 shock pulses, Y1 direction only	MIL-STD-883, Method 2002, Condition B, except Y1 direction only
Vibration (Variable Frequency)	50g peak	MIL-STD-883, Method 2007, Condition B
Autoclave	15 psig, 100% RH, 121°C, 96 hours	JESD22-A102, Condition C
HAST	130°C, 85% RH, 96 hours	JESD22-A110
Solderability	10X Magnification	J-STD-002, Para 4.2.5, Test S, 95% Coverage
Solder Reflow Heat	Sn-Pb Eutetic Process: 240°C peak Pb-Free Process: 260°C peak	J-STD-020, Table 4-1, 4-2 and 5-2; Figure 5-1
Moisture Sensitivity: Level 1	Bake at 125°C for 24 hours Soak at 85°C/85% RH for 168 hours, Reflow 3 cycles at 260°C peak	J-STD-020
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + proylene glycol monomethyl ether +	MIL-STD-202, Method 215



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
	monoethanolamine at 63°C to 70°C	