

F

E

D

C

B

A

F


E

D


C

B

A

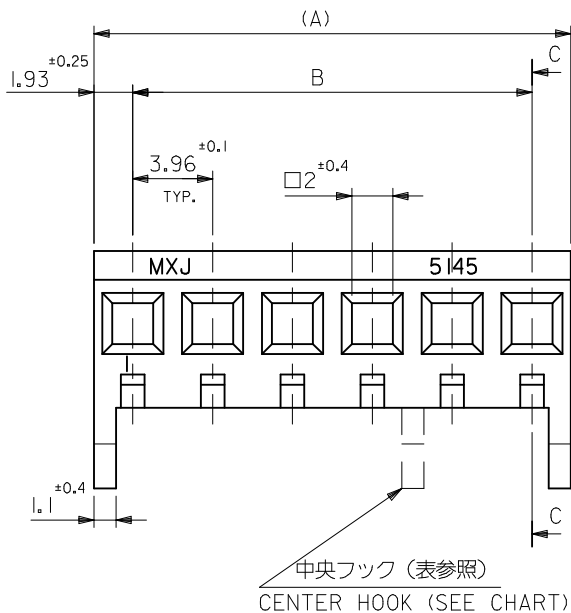



ハウジング (ナイロン66、UL 94V-2)
HOUSING (NYLON 66, UL94V-2)

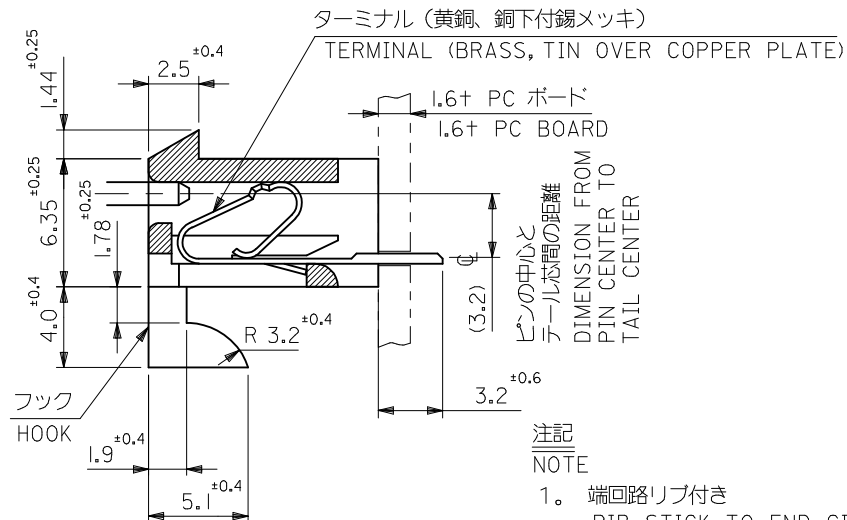

断面 C-C
SECT. C-C

注記
NOTE

1. 端回路リブ付き
RIB STICK TO END CIRCUIT
2. () 内寸法は参考値とする。
() DIMENSION IS FOR REFERENCE

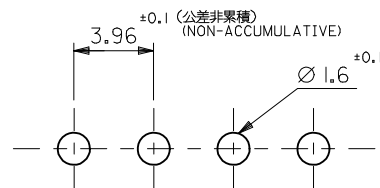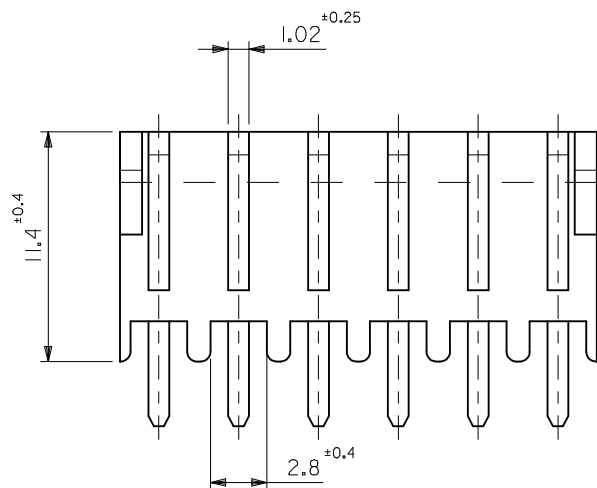

基板取付穴推奨寸法
RECOMMENDED PC BOARD HOLE DIMENSION

4と5の間 BETWEEN 4 AND 5	43.56 $\pm$ 0.25	47.42	26-01-1129	5145-12CH	12
5と6の間 BETWEEN 5 AND 6	35.64 $\pm$ 0.25	39.5	-1109	-10CH	10
4と5の間 BETWEEN 4 AND 5	31.68 $\pm$ 0.2	35.54	-1099	-09CH	9
4と5の間 BETWEEN 4 AND 5	27.72 $\pm$ 0.2	31.58	-1089	-08CH	8
—//—	23.76 $\pm$ 0.2	27.62	-1079	-07CH	7
—//—	19.8 $\pm$ 0.2	23.66	-1069	-06CH	6
—//—	15.84 $\pm$ 0.15	19.7	-1059	-05CH	5
—//—	11.88 $\pm$ 0.15	15.74	-1049	-04CH	4
—//—	7.92 $\pm$ 0.15	11.78	-1039	-03CH	3
—//—	3.96 $\pm$ 0.1	7.82	26-01-1029	5145-02CH	2
中央フック位置 CENTER HOOK	B	(A)	PART NO.	MATERIAL NO.	極数 NO. OF CKTS.

材料ハウジング:ナイロン66、UL 94V-2
MATERIAL HOUSING:NYLON 66, UL94V-2
ターミナル:黄銅、銅下付錫メッキ 0.254 t
TERMINAL:BRASS, TIN OVER COPPER PLATE 0.254 t

REVISED EC NO: J2009-0510 DRWN:NAKAMURAA 2008/12/08 CHKD:T. HARUYAMA 2008/12/08 APPR:NUKITA 2009/01/13 G	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 4:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION
		10 UNDER	± ---	DRAWN BY S. ANDO	DATE '96/5/24	TITLE KK3.96 SOLDER REC HSG ASSY MOLEX INCORPORATED		
		10 OVER 30 UNDER	± ---	CHECKED BY M. FUKUSHIMA	DATE '96/5/24			
		30 OVER	± ---	APPROVED BY M. ENOMOTO	DATE '96/5/24			
		ANGULAR ± --- °		MATERIAL NO.				
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		SD-5145-002		1 OF 1	
	REV	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						