

AC - DC Power Module


KAM07



Features:

- AC/DC power module.
- Universal input 85 to 265V ac.
- High efficiency up to 79%.
- Short circuit protection.
- Internal input filter.

Block diagram for KAM07 series with single output

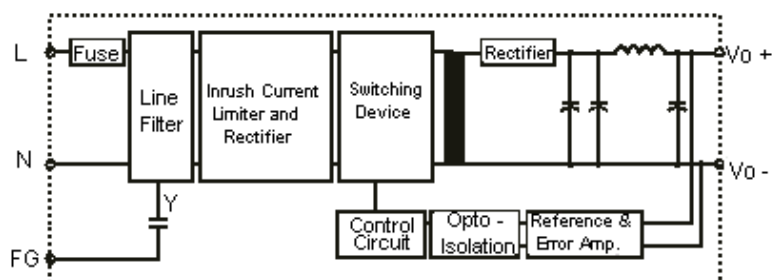

Specifications:

All specifications typical at nominal line, full load, 25°C unless otherwise noticed.

Characteristics	Conditions	Minimum	Typical	Maximum	Unit
Switching frequency	Vi nominal, Io nominal	80	-	-	KHz
Isolation voltage	Input/output	3000	-	-	V ac
Isolation resistance	Input/output, at 500V dc	100	-	-	MΩ
Ambient temperature	Operating at Vi nominal, Io nominal	-20	-	+71	°C
Case temperature		-	-	+85	-
Derating	Vi nominal, Io nominal +51 to +71°C	-	-	2	%/°C
Storage temperature	Non-operational	-40	-	+100	°C
MTBF	According to MIL-HDBK-217F, GF40	-	265,000	-	Hrs
Relative humidity	Vi nominal, Io nominal	-	-	95	% RH
Dimension	(L) 58 x (W) 45 x (H) 18.5	-	-	-	mm
Cooling	Free air convection	-	-	-	-
Case material	Plastic	-	-	-	-

Input Specifications

Characteristics	Conditions		Minimum	Maximum	Unit
Rated input voltage	Io nominal		85	240	V ac
Input voltage range	Io nominal	AC in		265	
		DC in	120	370	V dc
Line frequency	Vi nominal, Io nominal		47	63	Hz
Inrush current	Io nominal	Vi : 115V ac	-	10	A
		Vi : 230V ac	-	18	

AC - DC Power Module

KAM07




Output Specifications

Characteristics	Conditions		Minimum	Typical	Maximum	Unit
Output voltage accuracy	Vi nominal, Io nominal		-	-	±2	%
Minimum load	Vi nominal	single output models	0	-	-	
		dual output models (each output)	20	-	-	
Line regulation	Io nominal, Vi minimum to Vi maximum		-	-	±1	
Load regulation	Vi nominal, Io minimum to Io nominal	single output models	-	-	±2	
		dual output models	-	-	±5	
Transient recovery time	Vi nominal, Io nominal = I ⇔ 0.5 Io nominal		-	300	-	µS
Temperature coefficient	Vi nominal, Io nominal		-	-	±0.02	%/°C
Ripple and noise	Vi nominal, Io nominal, BW = 20MHz		Vout x ±1% p-p maximum			mV
Efficiency	Vi nominal, Io nominal, Po/Pi		Up to 79%			

Control and Protection

Input fuse	T2A/250V ac internal
Output short circuit	By current limited

Mechanism and Pin Configuration

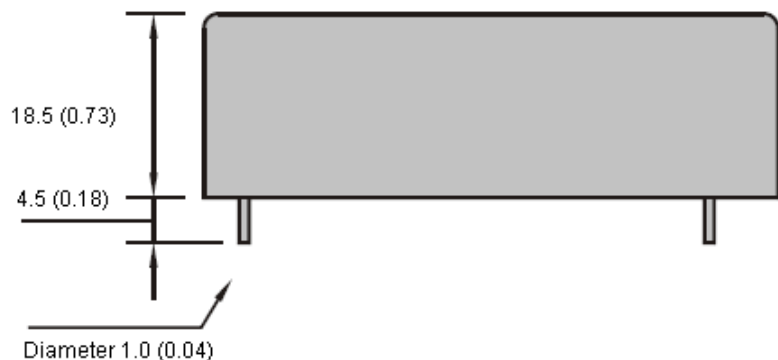


Dimensions : Millimetres (Inches)

AC - DC Power Module

KAM07



Mechanism and Pin Configuration

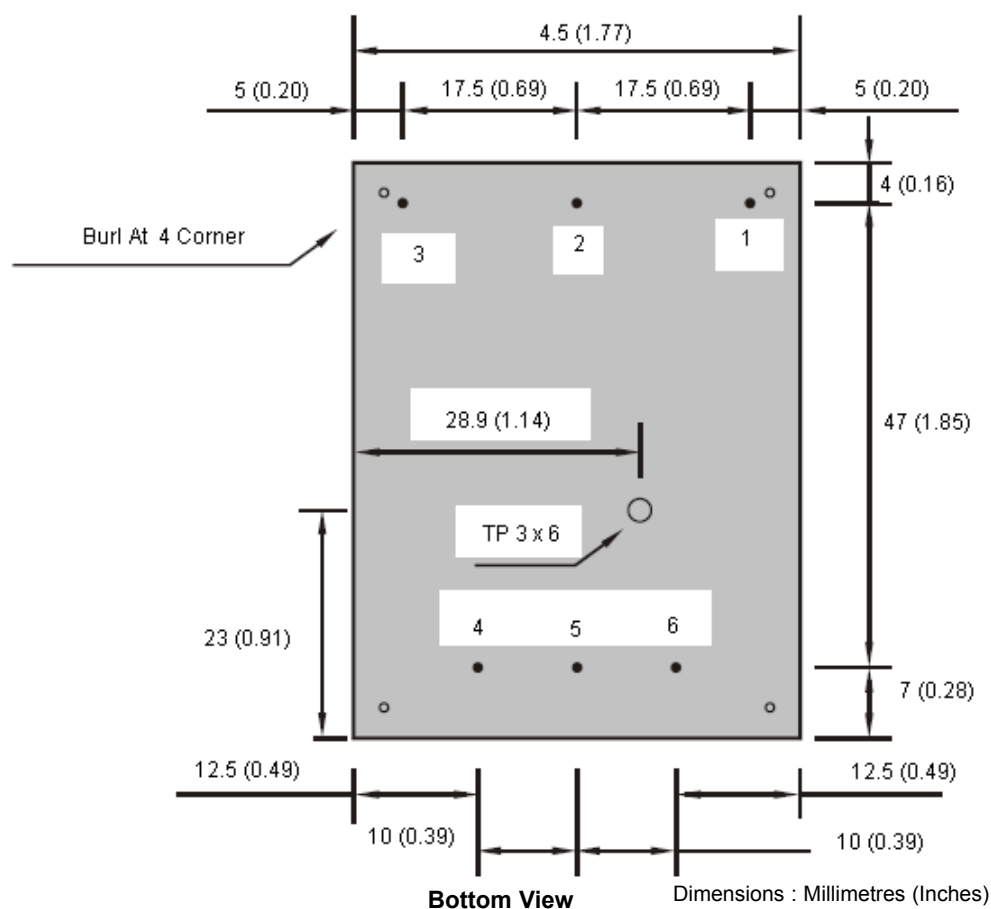

Physical Characteristics

Case size	58 x 45 x 18.5mm (2.28 x 1.77 x 0.73 inches)
Case material	Plastic

General Pin Assignment


PIN Number	1	2	3	4	5	6
Single	Line	Neutral	F.G.	Vo-	No Pin	Vo+

AC - DC Power Module

KAM07



Derating

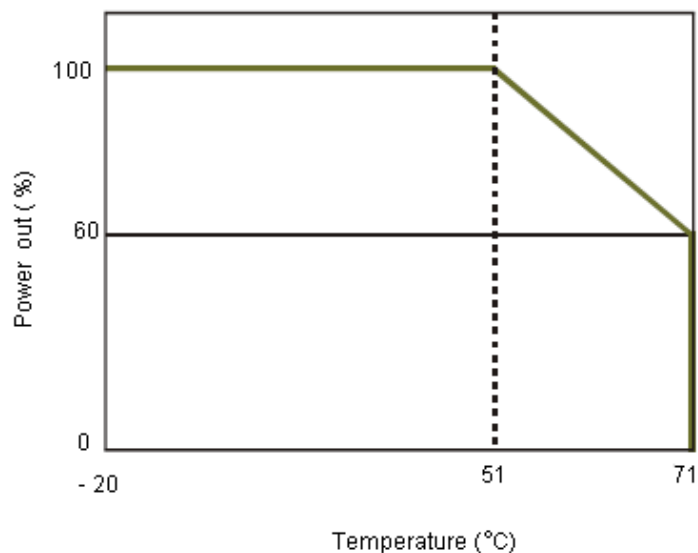

Specification Table

Description	Type	Input Voltage (V ac)	Output Wattage (Watts)	Output Voltage (V dc)	Output Current (mA)	EFF (Typical) (%)	EFF (Minimum) (%)	Part Number
PSU, Encapsulated	Single Output	85 to 265	7.5	+12	630	78	75	KAM0712

Disclaimer This data sheet and its contents (the "Information") belong to the Premier Farnell Group (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. SPC Multicomp is the registered trademark of the Group. © Premier Farnell plc 2009.