


## Low Profile Power Relay with 15.7 mm height, ideal for incorporation in miniature equipments

- A wide variety of single pole, double pole and high-capacity type Relays are available.
- High sensitivity with power consumption of 400 mW.
- Offers high insulation with insulation distance above 8 mm and impulse withstand voltage of 10kV between coil and contacts.
- Satisfies ambient operating temperature requirement of 85°C.
- Standard model conforms to VDE standards.

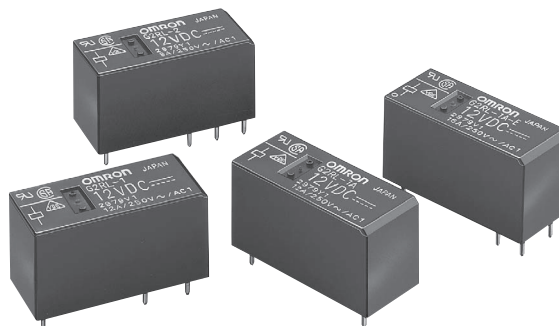

**RoHS Compliant**

### Model Number Legend

G2RL-□□□-□ 1. Number of Poles 2. Contact Form 3. Enclosure rating 4. Classification

1 2 3 4

1: 1-pole 2: 2-pole

None : NO/NC A : NO

None : Flux protection 4 : Fully sealed

None : Standard E : High-capacity

### Application Examples

- Home appliances
- OA equipments
- Industrial machinery

### Ordering Information

| Classification | Contact form | Terminal Shape | Enclosure rating | Model      | Rated coil voltage                  | Minimum packing unit |
|----------------|--------------|----------------|------------------|------------|-------------------------------------|----------------------|
| Standard       | SPST-NO (1a) | PCB terminals  | Flux protection  | G2RL-1A    | 5 VDC<br>12 VDC<br>24 VDC<br>48 VDC | 20 pcs/tube          |
|                | SPDT (1c)    |                | Fully sealed     | G2RL-1A4   |                                     |                      |
|                |              |                | Flux protection  | G2RL-1     |                                     |                      |
|                | DPST-NO (2a) |                | Fully sealed     | G2RL-14    |                                     |                      |
|                |              |                | Flux protection  | G2RL-2A    |                                     |                      |
|                | DPDT (2c)    |                | Fully sealed     | G2RL-2A4   |                                     |                      |
|                |              |                | Flux protection  | G2RL-2     |                                     |                      |
|                |              |                | Fully sealed     | G2RL-24    |                                     |                      |
| High-capacity  | SPST-NO (1a) |                | Flux protection  | G2RL-1A-E  |                                     |                      |
|                | SPDT (1c)    |                | Fully sealed     | G2RL-1A4-E |                                     |                      |
|                |              |                | Flux protection  | G2RL-1-E   |                                     |                      |
|                |              |                | Fully sealed     | G2RL-14-E  |                                     |                      |

Note 1. When ordering, add the rated coil voltage to the model number.

Example: G2RL-1A 5 VDC

Rated coil voltage

Note 2. Place your order in tube (20 pcs/tube) units.

### Ratings

#### Coil

| Item          | Rated current (mA) | Coil resistance (Ω) | Must operate voltage (V) | Must release voltage (V) | Max. voltage (V) | Power consumption (mW) |
|---------------|--------------------|---------------------|--------------------------|--------------------------|------------------|------------------------|
| Rated voltage |                    |                     | % of rated voltage       |                          |                  |                        |
| 5 VDC         | 80.0               | 62.5                | 75% max.                 | 10% min.                 | 130% (at 85°C)   | Approx. 400            |
| 12 VDC        | 33.3               | 360                 |                          |                          |                  |                        |
| 24 VDC        | 16.7               | 1,440               |                          |                          |                  |                        |
| 48 VDC        | 8.96               | 5,358               |                          |                          |                  | Approx. 430            |

Note 1. The rated current and coil resistance are measured at a coil temperature of 23°C with a tolerance of ±10%.

Note 2. The operating characteristics are measured at a coil temperature of 23°C.

Note 3. The "Max. voltage" is the maximum voltage that can be applied to the relay coil.

#### Contacts

| Item                                      | Classification Model | General-purpose Models (resistive load)      |        |                                            |        | High-capacity Models (resistive load)        |          |
|-------------------------------------------|----------------------|----------------------------------------------|--------|--------------------------------------------|--------|----------------------------------------------|----------|
|                                           |                      | G2RL-1A                                      | G2RL-1 | G2RL-2A                                    | G2RL-2 | G2RL-1A-E                                    | G2RL-1-E |
| Contact type                              |                      | Single                                       |        |                                            |        |                                              |          |
| Contact material                          |                      | Ag-alloy (Cd free)                           |        |                                            |        |                                              |          |
| Rated load                                |                      | 12 A at 250 VAC<br>12 A at 24 VDC (See note) |        | 8 A at 250 VAC<br>8 A at 30 VDC (See note) |        | 16 A at 250 VAC<br>16 A at 24 VDC (See note) |          |
| Rated carry current                       |                      | 12 A (See note)                              |        | 8 A (70°C)/5 A (85°C) (See note)           |        | 16 A (See note)                              |          |
| Max. switching voltage                    |                      | 440 VAC, 300 VDC                             |        |                                            |        |                                              |          |
| Max. switching current                    |                      | 12 A                                         |        | 8 A                                        |        | 16 A                                         |          |
| Failure rate (P level) (reference value*) |                      | 40 mA at 24 VDC                              |        |                                            |        |                                              |          |

\* This value was measured at a switching frequency of 120 operations/min.

Note: Contact your OMRON representative for the ratings on fully sealed models.


■Characteristics

| Classification                |                                        | General-purpose Models                                                             |                                                                                  | High-capacity Models                                                                 |
|-------------------------------|----------------------------------------|------------------------------------------------------------------------------------|----------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| Item                          | Number of poles                        | 1-pole                                                                             | 2-pole                                                                           | 1-pole                                                                               |
| Contact resistance *1         |                                        | 100 mΩ max.                                                                        |                                                                                  |                                                                                      |
| Operate (set) time            |                                        | 15 ms max.                                                                         |                                                                                  |                                                                                      |
| Release (reset) time          |                                        | 5 ms max.                                                                          |                                                                                  |                                                                                      |
| Max. operating frequency      | Mechanical                             | 18,000 operation/hr                                                                |                                                                                  |                                                                                      |
|                               | Electrical                             | 1,800 operation/hr                                                                 |                                                                                  |                                                                                      |
| Insulation resistance *2      |                                        | 1,000 MΩ min. (at 500 VDC)                                                         |                                                                                  |                                                                                      |
| Dielectric strength           | Between coil and contacts              | 5,000 VAC, 50/60 Hz for 1min                                                       |                                                                                  |                                                                                      |
|                               | Between contacts of the same polarity  | 1,000 VAC, 50/60 Hz for 1min                                                       |                                                                                  |                                                                                      |
|                               | Between contacts of different polarity | —                                                                                  | 2,500 VAC, 50/60 Hz for 1min                                                     | —                                                                                    |
| Impulse withstand voltage     |                                        | 10 kV (1.2 x 50 μs)                                                                |                                                                                  |                                                                                      |
| Vibration resistance          | Destruction                            | 10 to 55 to 10 Hz, 0.75 mm single amplitude (1.5 mm double amplitude)              |                                                                                  |                                                                                      |
|                               | Malfunction                            | 10 to 55 to 10 Hz, 0.75 mm single amplitude (1.5 mm double amplitude)              |                                                                                  |                                                                                      |
| Shock resistance              | Destruction                            | 1,000 m/s <sup>2</sup>                                                             |                                                                                  |                                                                                      |
|                               | Malfunction                            | Energized: 100m/s <sup>2</sup> , De-energized: 100m/s <sup>2</sup>                 |                                                                                  |                                                                                      |
| Durability                    | Mechanical                             | 20,000,000 operations (at 18,000 operations/hr)                                    |                                                                                  |                                                                                      |
|                               | Electrical *3 (resistive load)         | G2RL-1(A): 50,000 operations at 250 VAC, 12 A<br>30,000 operations at 24 VDC, 12 A | G2RL-2(A): 30,000 operations at 250 VAC, 8 A<br>30,000 operations at 30 VDC, 8 A | G2RL-1(A)-E: 30,000 operations at 250 VAC, 16 A<br>30,000 operations at 24 VDC, 16 A |
| Ambient operating temperature |                                        | -40°C to 85°C (with no icing or condensation)                                      |                                                                                  |                                                                                      |
| Ambient operating humidity    |                                        | 5% to 85% (with no icing or condensation)                                          |                                                                                  |                                                                                      |
| Weight                        |                                        | Approx. 12 g                                                                       |                                                                                  |                                                                                      |


Note. Values in the above table are the initial values.  
\*1. Measurement conditions: 5 VDC, 1 A, voltage drop method  
\*2. Measurement conditions: Measured at the same points as the dielectric strength using a 500 VDC ohmmeter.  
\*3. 1,800 operations per hour.

■Engineering Data


●Maximum Switching Capacity  
G2RL-1A, G2RL-1

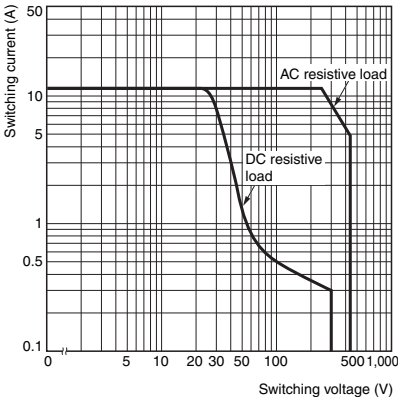


G2RL-1A-E, G2RL-1-E

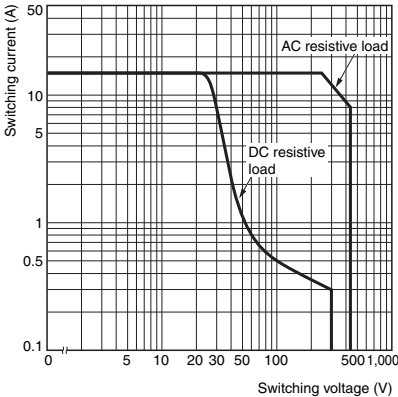


G2RL-2A, G2RL-2

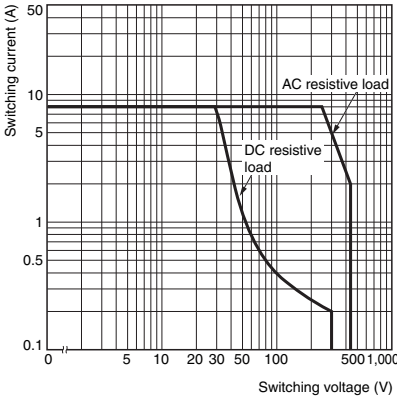

●Ambient Temperature vs. Maximum Coil Voltage

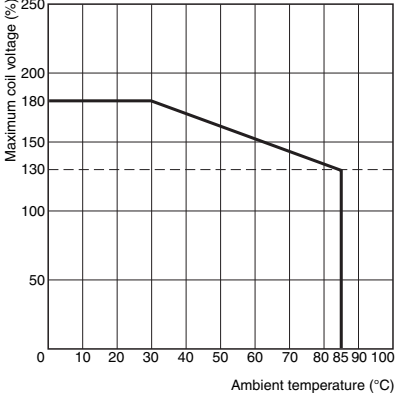


●Ambient Temperature vs. Must Operate and Must Release Voltages

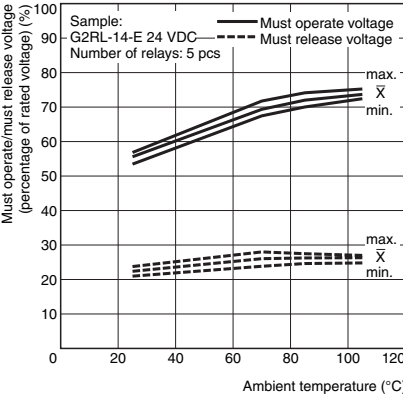


Note. The maximum coil voltage refers to the maximum value in a varying range of operating power voltage, not a continuous voltage.

## ●Shock Malfunction


### G2RL-1 (A)-E

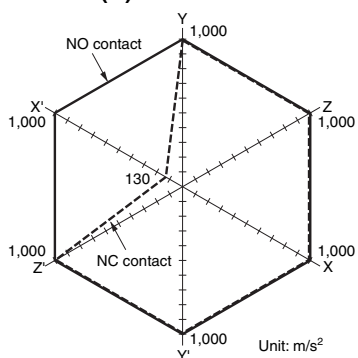


Sample: G2RL-14 12 VDC  
Number of Relays: 5 pcs  
Test conditions: Shock is applied in  $\pm X$ ,  $\pm Y$ , and  $\pm Z$  directions three times each with without energizing the Relays to check the number of malfunctions.  
Requirement: None malfunction  
100 m/s<sup>2</sup>



### G2RL-2 (A)


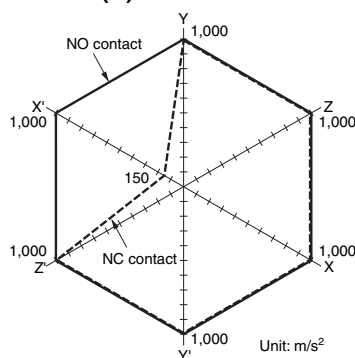


Sample: G2RL-24 12 VDC  
Number of Relays: 5 pcs  
Test conditions: Shock is applied in  $\pm X$ ,  $\pm Y$ , and  $\pm Z$  directions three times each with without energizing the Relays to check the number of malfunctions.  
Requirement: None malfunction  
100 m/s<sup>2</sup>




## ■Dimensions (Unit: mm)


### G2RL-1A, G2RL-1A4

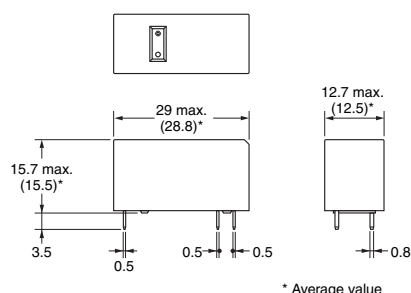

#### PCB Mounting Holes (Bottom View)


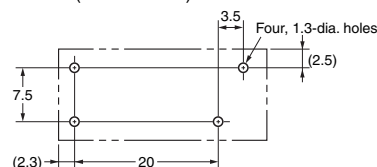


#### Terminal Arrangement/ Internal Connections (Bottom View)




\* Average value


### G2RL-1, G2RL-14

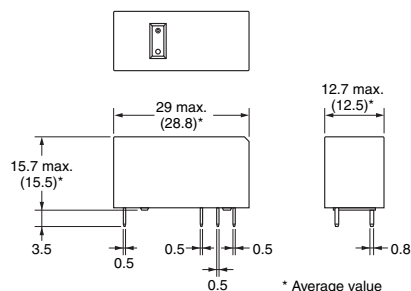

#### PCB Mounting Holes (Bottom View)


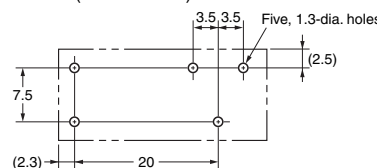


#### Terminal Arrangement/ Internal Connections (Bottom View)




\* Average value


### G2RL-1A-E, G2RL-1A4-E

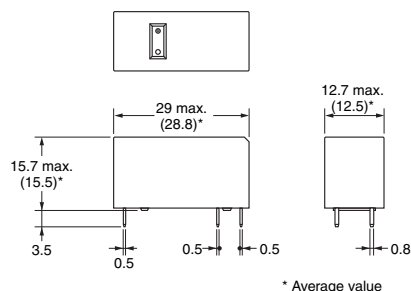

#### PCB Mounting Holes (Bottom View)


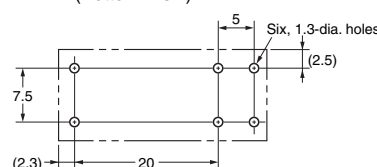


#### Terminal Arrangement/ Internal Connections (Bottom View)




\* Average value


### G2RL-1-E, G2RL-14-E

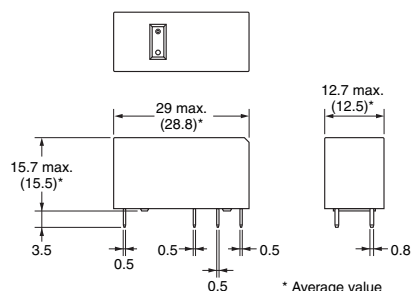

#### PCB Mounting Holes (Bottom View)

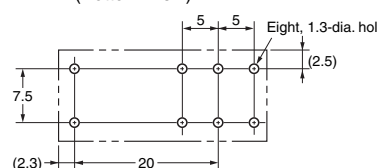


#### Terminal Arrangement/ Internal Connections (Bottom View)




\* Average value


### G2RL-2A, G2R-2A4

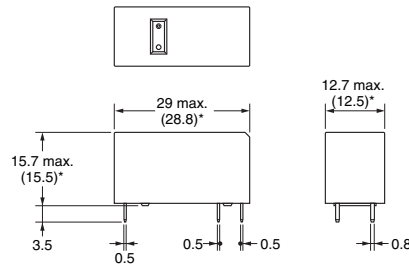



PCB Mounting Holes  
(Bottom View)

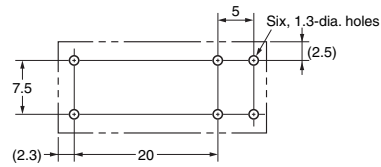


Terminal Arrangement/  
Internal Connections  
(Bottom View)




### G2RL-2, G2R-24

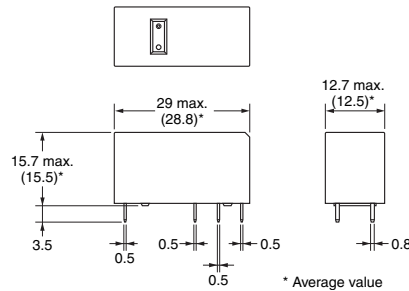

PCB Mounting Holes  
(Bottom View)

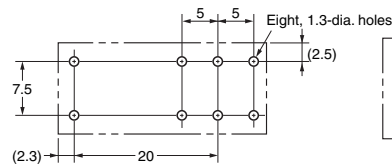

Terminal Arrangement/  
Internal Connections  
(Bottom View)



## Approved Standards

- The approval rating values for overseas standards are different from the performance values determined individually. Confirm the values before use.

**UL Recognized:** (File No. 41643)

**CSA Certified:** (File No. LR31928)

| Model     | Contact form | Coil ratings | Contact ratings                  | Number of test operations |
|-----------|--------------|--------------|----------------------------------|---------------------------|
| G2RL-1A   | SPST-NO (1a) | 3 to 48 VDC  | 12 A, 250 VAC (General Use) 40°C | 100,000                   |
| G2RL-1    | SPDT (1c)    |              | 12 A, 24 VDC (Resistive) 40°C    | 50,000                    |
| G2RL-1A-E | SPST-NO (1a) |              | 16 A, 250 VAC (General Use) 40°C | 100,000                   |
| G2RL-1-E  | SPDT (1c)    |              | 16 A, 24 VDC (Resistive) 40°C    | 50,000                    |
| G2RL-2A   | DPST-NO (2a) |              | 8 A, 277 VAC (General Use) 40°C  | 100,000                   |
| G2RL-2    | DPDT (2c)    |              | 8 A, 30 VDC (Resistive) 40°C     |                           |

**EN/IEC, VDE Certified** (Registration No. 119650)

| Model     | Contact form | Coil ratings              | Contact ratings                                                                             | Number of test operations |
|-----------|--------------|---------------------------|---------------------------------------------------------------------------------------------|---------------------------|
| G2RL-1A   | SPST-NO (1a) | 5, 12, 18, 22, 24, 48 VDC | 12 A, 250 VAC ( $\cos\phi=1$ ) 85°C                                                         | 100,000                   |
| G2RL-1    | SPDT (1c)    |                           | 12 A, 24 VDC (L/R=0 ms) 85°C                                                                |                           |
| G2RL-1A-E | SPST-NO (1a) |                           | AC15: 3 A at 240 VAC at room temperature<br>DC13: 2.5 A at 24 VDC, 50ms at room temperature | 6,000                     |
| G2RL-1-E  | SPDT (1c)    |                           | 16 A, 250 VAC ( $\cos\phi=1$ ) 85°C                                                         | 30,000                    |
|           |              |                           | 16 A, 24 VDC (L/R=0 ms) 85°C                                                                | 15,000                    |
|           |              |                           | AC15: 3 A at 240 VAC (NO) at room temperature,<br>1.5 A at 240V AC (NC) at room temperature | 6,000                     |
|           |              |                           | DC13: 2.5 A at 24 VDC (NO), 50ms at room temperature                                        |                           |
| G2RL-2A   | DPST-NO (2a) |                           | 8 A, 250 VAC ( $\cos\phi=1$ ) 85°C                                                          | 30,000                    |
|           |              |                           | 8 A, 24 VDC (L/R=0 ms) 85°C                                                                 | 15,000                    |
| G2RL-2    | DPDT (2c)    |                           | AC15: 1.5 A at 240VAC at room temperature<br>DC13: 2 A at 30 VDC, 50ms at room temperature  | 6,000                     |

## Precautions

- Please refer to “PCB Relays Common Precautions” for correct use.

### Correct Use

#### ● Mounting Position Compared to G2R Model

- Although the G2RL model and the G2R model are both low profile Relays, their characteristics such as switching capacity are different. Be sure to check operation under the actual operating conditions before use.

#### ● Cleaning

- The G2RL model is flux-resistant with two sealing holes on the case. Thus, do not clean the Relay by boiling or soaking in water. Consult your Omron sales representative for sealed type Relay.

#### ● Using Relays in an Atmosphere Containing Corrosive Gas

- Do not use Relays in an atmosphere containing corrosive gas (sulfuric or organic gas). Otherwise, connection failure due to corrosion on the contact surface may lead to functional faults.

• Application examples provided in this document are for reference only. In actual applications, confirm equipment functions and safety before using the product.  
• Consult your OMRON representative before using the product under conditions which are not described in the manual or applying the product to nuclear control systems, railroad systems, aviation systems, vehicles, combustion systems, medical equipment, amusement machines, safety equipment, and other systems or equipment that may have a serious influence on lives and property if used improperly. Make sure that the ratings and performance characteristics of the product provide a margin of safety for the system or equipment, and be sure to provide the system or equipment with double safety mechanisms.

**Note: Do not use this document to operate the Unit.**

**OMRON Corporation**  
Electronic and Mechanical Components Company

**Contact:** [www.omron.com/ecb](http://www.omron.com/ecb)

**Cat. No. J117-E1-06**  
0812(0207)(O)