


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

POSITION	LOAD @ "DETENT"		TOLERANCE	
	LBS.	NEWTONS	LBS.	NEWTONS
1	69	307	+/- 50 LBS	222
2	130	578	+/- 100 LBS	445
3	206	921	+/- 100 LBS	445
4	271	1205	+/- 100 LBS	445
5	311	1383	+/- 100 LBS	445
6	379	1686	+/- 100 LBS	445
7	450	2002	+/- 100 LBS	445

ACCURACY OF LOAD @ DETENT DEPENDS
UPON MATCHING THE INDICATOR LINE
EXACTLY WITH THE DESIRED SETTING

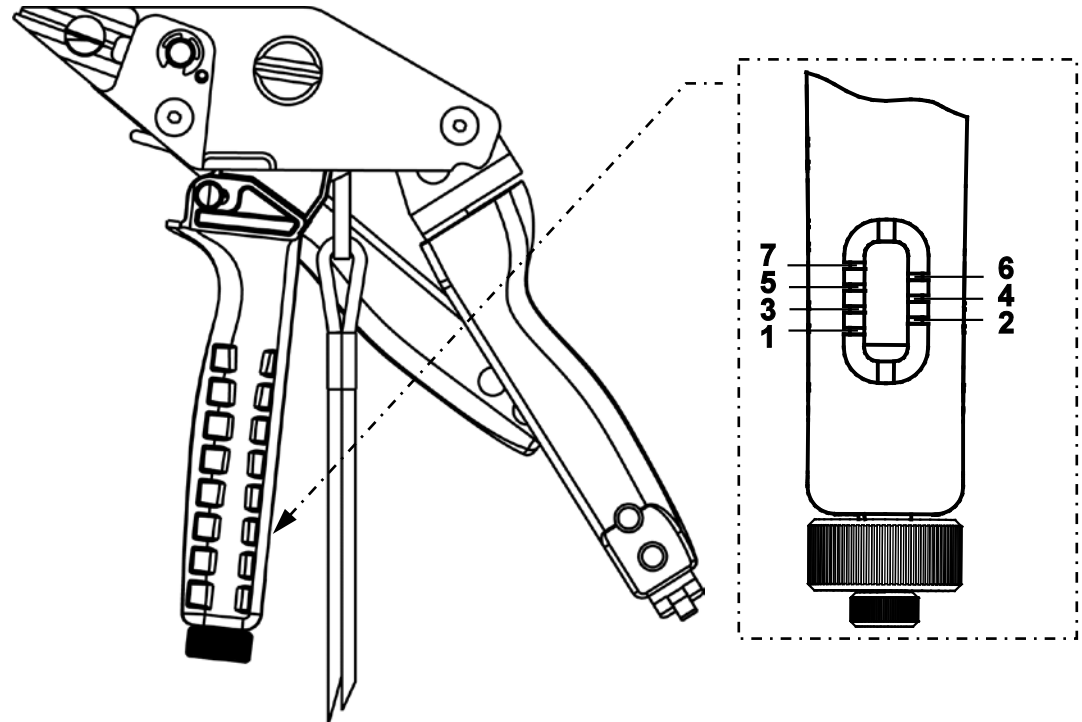

							BT2HT TENSION ROD FORCE @ DETENT					
							CONTROL DRAWING					
							ITEM REVISION NAME: TM25767A01_02					
							UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: (.x) ± ---					

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Panduit:](#)

[BT2HT](#)