


ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

REVISIONS		DOC. NO.	SPC-F005	* Effective:	12/21/98	* DCP No:	680	
DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
138	A	RELEASED	JMM	1/18/02	HO	1/24/02	DJC	1/25/02

Kit Contains:

Size (Inch)	SPC Type No.	QTY.
1/16	FPS-004-6036-BLK	30
1/8	FPS-008-6028-BLK	25
3/16	FPS-012-6024-BLK	20
1/4	FPS-016-6020-BLK	15
3/8	FPS-024-6016-BLK	7
1/2	FPS-032-6014-BLK	5

With a shrink ratio of 2:1 and rated at 135°C for continuous operation, this tubing is typically used as a shrink fit electrical insulation over cable splices and terminations. It is also used for light-weight harness covering, wire marking and wire bundling. Meets all MIL-DTL-23053/5 Class 1 and Class 2 specifications. Color: Black. 6-Inch lengths.

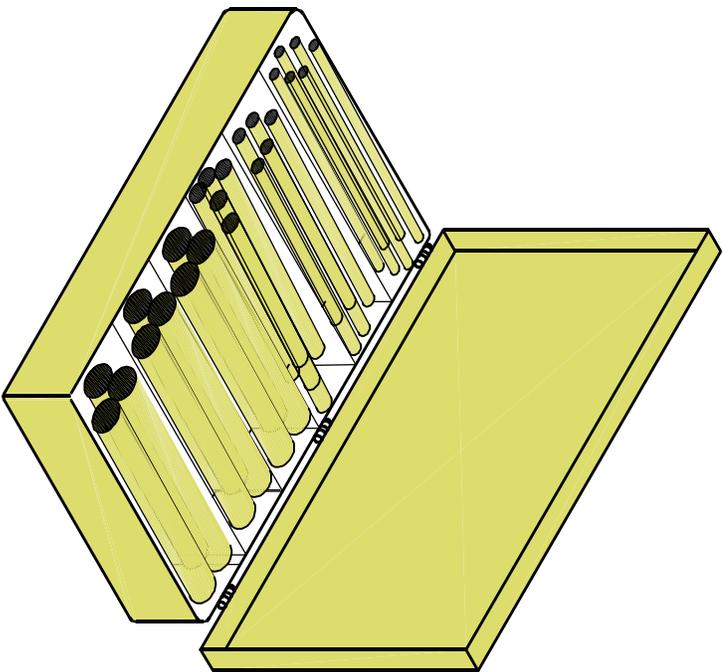

DISCLAIMER:
 ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL. THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.	DRAWN BY:	DATE:
	Jeff McVicker	1/18/02
	CHECKED BY:	DATE:
	Hisham Odish	1/24/02
	APPROVED BY:	DATE:
	Daniel Carey	1/25/02



SPC TECHNOLOGY

DRAWING TITLE:		102-Piece, Heat-Shrinkable, Polyolefin Tubing Assortment	
SIZE	DWG. NO.	ELECTRONIC FILE	REV
A	2778	92N5421.dwg	A
SCALE:	NTS	U.O.M.: INCHES [mm]	SHEET: 1 OF 1