REV.	BC

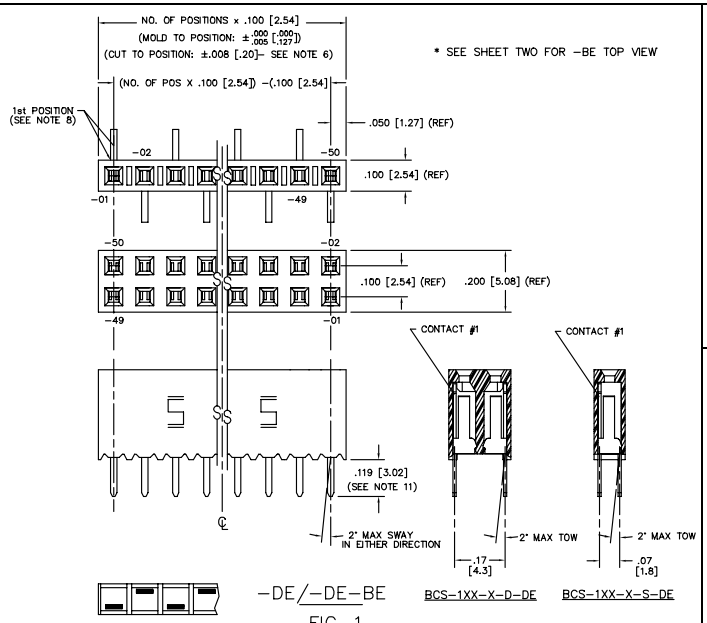

TABLE 1			
ENTRY SPEC	BODY SPEC	CONTACT #1	CONTACT #2
-S-DE (SEE FIG.1)	SSM-XX-S	C-95-01-X	---------
-D-DE (SEE FIG.1)	SSM-XX-D	C-95-01-X	---------
-S-TE (SEE FIG.3)	SSM-XX-S	C-95-09-X	---------
-D-TE (SEE FIG.3)	SSM-XX-D	C-95-09-X	---------
-S-HE (SEE FIG.2)	BCH-XX-S	C-58-05-X	---------
-D-HE (SEE FIG.2)	BCH-XX-D	C-58-04-X	C-58-03-X
-S-PE (SEE FIG.4)	SSM-XX-S	C-166-10-X	---------
-D-PE (SEE FIG.4)	SSM-XX-D	C-166-10-X	---------
-S-DE-BE (SEE FIG.1)	SSM-XX-S-BE	C-95-01-X	---------
-D-DE-BE (SEE FIG.1)	SSM-XX-D	C-95-01-X	---------
-S-PE-BE (SEE FIG.4)	SSM-XX-S-BE	C-166-10-X	---------
-D-PE-BE (SEE FIG.4)	SSM-XX-D	C-166-10-X	---------

UNLESS OTHERWISE NOTED
DIMENSIONS ARE IN INCHES — TOLERANCES ARE:
ONE PLACE DECIMALS: ± .1 [2.5] THREE PLACE DECIMALS: ± .005 [.127]
TWO PLACE DECIMALS: ± .01 [.25] FOUR PLACE DECIMALS: ± .0020 [.0508]
ANGLES ±2°

TITLE: BOX CONNECTOR SOCKET STRIP

DWG NO: BCS-1XX-XX-X-XX-XX

SHEET 1 OF 2

BCS-1XX-XX-X-XX-XX

NO. OF POSITIONS
-01 THRU -50

PLATING SPEC.
-T: TIN
-L: LIGHT SELECTIVE
-F: FLASH GOLD
-P: GOLD FLASHED PALLADIUM NICKEL
-S: SELECTIVE
-H: HEAVY GOLD FLASH ON TAIL
-SM: HEAVY GOLD SELECTIVE, MATTE TIN TAIL (SEE TABLE 1)
-TM: MATTE TIN (SEE TABLE 1)
-LM: LIGHT GOLD SELECTIVE, MATTE TIN TAIL (SEE TABLE 1)
-FM: FLASH GOLD SELECTIVE, MATTE TIN TAIL (SEE TABLE 1)

POLARIZING OPTION
INSERT PK-06-N INTO SPECIFIED POS AND BREAK OFF TAB
(NOT AVAILABLE FOR -BE OPTION)

ENTRY SPECIFICATION
-DE: DUAL ENTRY (SEE TABLE 1)
-TE: TOP ENTRY (SEE TABLE 1)
-HE: HORIZONTAL ENTRY (SEE TABLE 1)
-PE: PASS-THROUGH ENTRY (SEE TABLE 1)
-DE-BE: (SEE TABLE 1)
-PE-BE: (SEE TABLE 1)

BODY SPECIFICATION
-S: SINGLE ROW (SEE TABLE 1)
-D: DOUBLE ROW (SEE TABLE 1)

ALL DIMS. DIFFERENT AS SHOWN, OTHERWISE SAME AS FIGURE 1

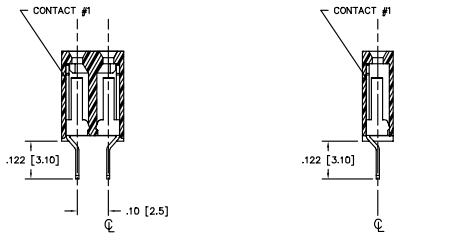

-TE
FIG. 3

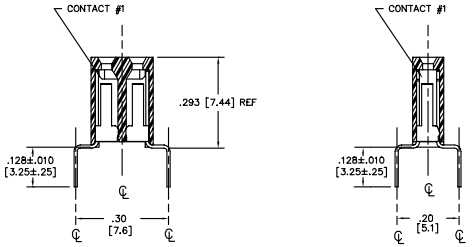

-PE/-PE-BE
FIG. 4
(SEE SHEET 2 FOR IN-PROCESS)



-S-HE
IN-PROCESS





-D-HE
IN-PROCESS

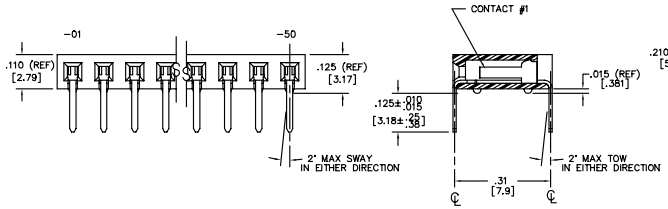

BCS-1XX-X-S-HE

-HE
FIG. 2

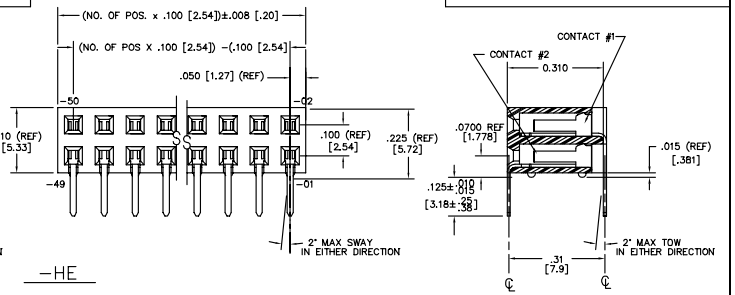

BCS-1XX-X-D-HE

NOTES:
1. PUSHOUT FORCE TO BE: 1 lb. MIN.
2. Ⓒ REPRESENTS CRITICAL DIM. FOR STATISTICAL PROCESS CONTROL.
3. CONTACT MATERIAL: PHOSPHOR BRONZE.
4. INSULATOR MATERIAL: BLACK, GLASS-FILLED LCP.
5. [ ] DIMENSIONS ARE IN MILLIMETERS.
6. MINIMUM WALL THICKNESS ON CUT PARTS: .009.
7. CUT PARTS TO BE SYMMETRICAL ABOUT C . L
8. 1st POSITION WILL ALWAYS POINT UP ON TOP VIEW AS SHOWN.
9. 1 THROUGH 4 POSITIONS ARE TO BE LAYERED PACKAGED, 5 THROUGH 50 POSITIONS ARE TO BE TUBED FOR THIS PART NUMBER.
10. DAMAGE TO THE CUT SURFACE CAN NOT EFFECT LEAD-IN OF THE CORES.
11. MAX PIN VARIATION WITHIN EACH ROW AND FROM ADJACENT TAIL TO TAIL TO BE .0060

PROPRIETARY NOTE
THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC INC. IT MAY NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF SAMTEC INC.

EXISPROD\ASSEMBLY\100 BCS-ASM

samtec
520 PARK EAST BLVD. NEW ALBANY, INDIANA 47150
PHONE (812) 944-6733 P.O. BOX 1147
CODE 55322

MADE BY: KOLB 9-12-91

BCS-1XX-XX-X-XX-XX
SHEET 1 OF 2