




C3216X7R2A334K130AA (TDK item description : C3216X7R2A334KT****)

Applications	 Commercial Grade
	 Please refer to Part No. CGA5K2X7R2A334K130AA for automotive use.
Feature	Mid Mid Voltage (100 to 630V)
Series	C3216 [EIA CC1206]



Size	
Length(L)	3.20mm +/-0.20mm
Width(W)	1.60mm +/-0.20mm
Thickness(T)	1.30mm +/-0.20mm
Terminal Width(B)	0.20mm Min.
Terminal Spacing(G)	1.00mm Min.
Recommended Land Pattern(PA)	2.10 to 2.50mm (Flow Soldering) 2.00 to 2.40mm (Reflow Soldering)
Recommended Land Pattern(PB)	1.10 to 1.30mm (Flow Soldering) 1.00 to 1.20mm (Reflow Soldering)
Recommended Land Pattern(PC)	1.00 to 1.30mm (Flow Soldering) 1.10 to 1.60mm (Reflow Soldering)
Recommended Slit Pattern(SD)	

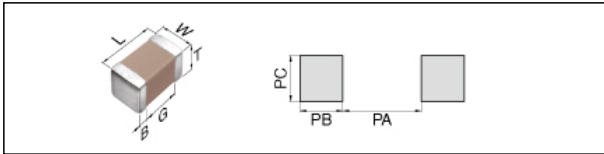
Electrical Characteristics	
Capacitance	330nF +/-10%
Rated Voltage	100Vdc
Temperature Characteristic	X7R(+/-15%)
Dissipation Factor	3% Max.
Insulation Resistance	1515MΩ Min.

Other	
Soldering Method	Reflow, Flow
AEC Q200	No
Packing	Blister (Plastic)Taping [180mm Reel]
Package Quantity	2000Pcs Min.


•This PDF document was created based on the data listed on the TDK Corporation website.
 •All specifications are subject to change without notice.

C3216X7R2A334K130AA


Characteristic Graphs (This is reference data, and does not guarantee the product's characteristics.)

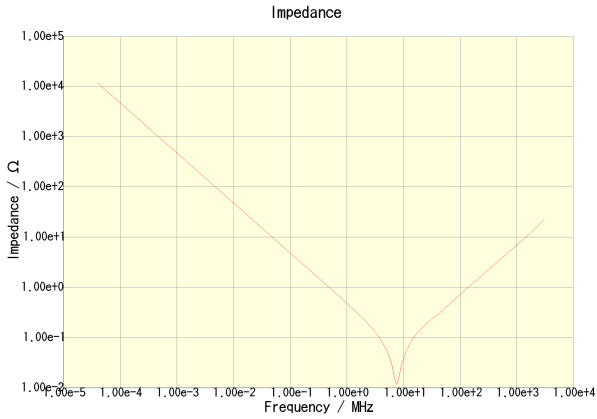


C3216X7R2A334K130AA

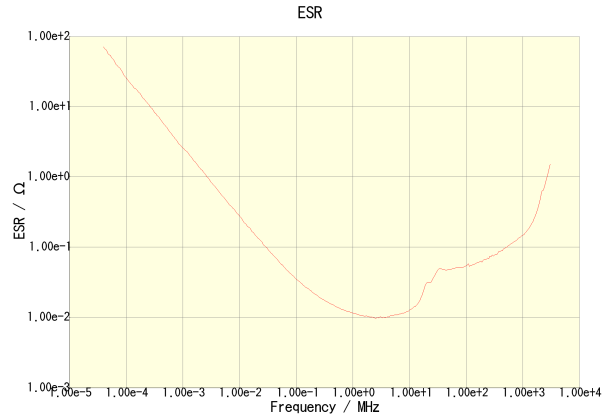


C3216X7R2A334K130AA

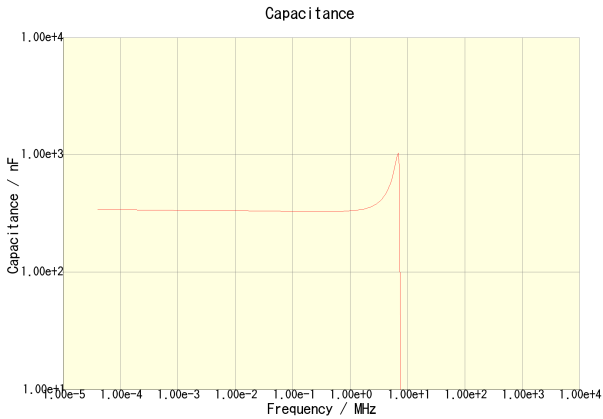


C3216X7R2A334K130AA

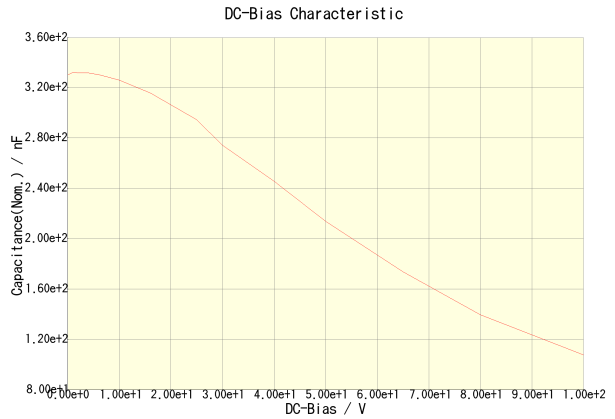

C3216X7R2A334K130AA

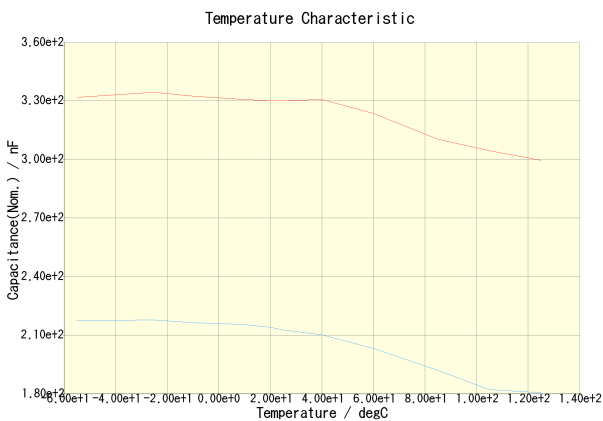

C3216X7R2A334K130AA(DC Bias = 0V) C3216X7R2A334K130AA(DC Bias = 50V)

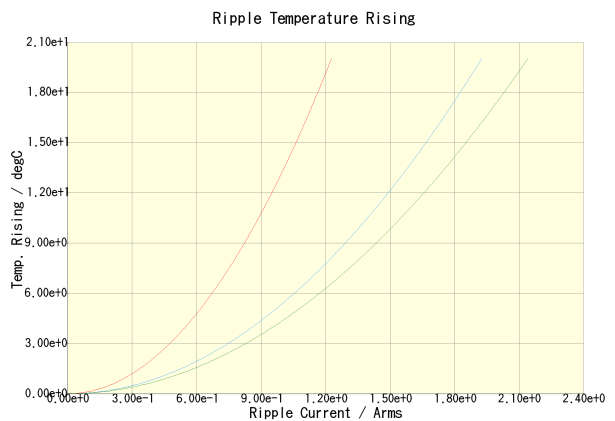

C3216X7R2A334K130AA(100kHz) C3216X7R2A334K130AA(500kHz)
C3216X7R2A334K130AA(1MHz)

•This PDF document was created based on the data listed on the TDK Corporation website.
•All specifications are subject to change without notice.