

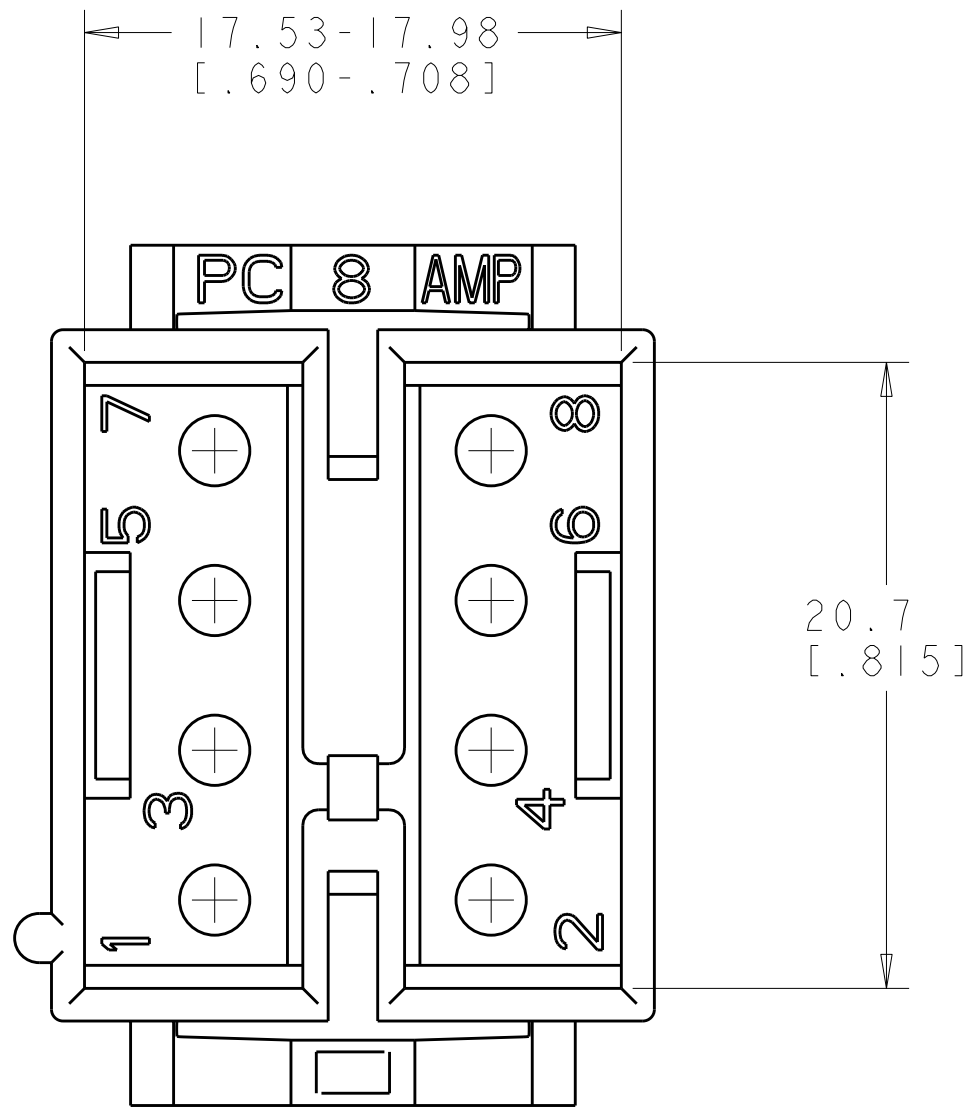
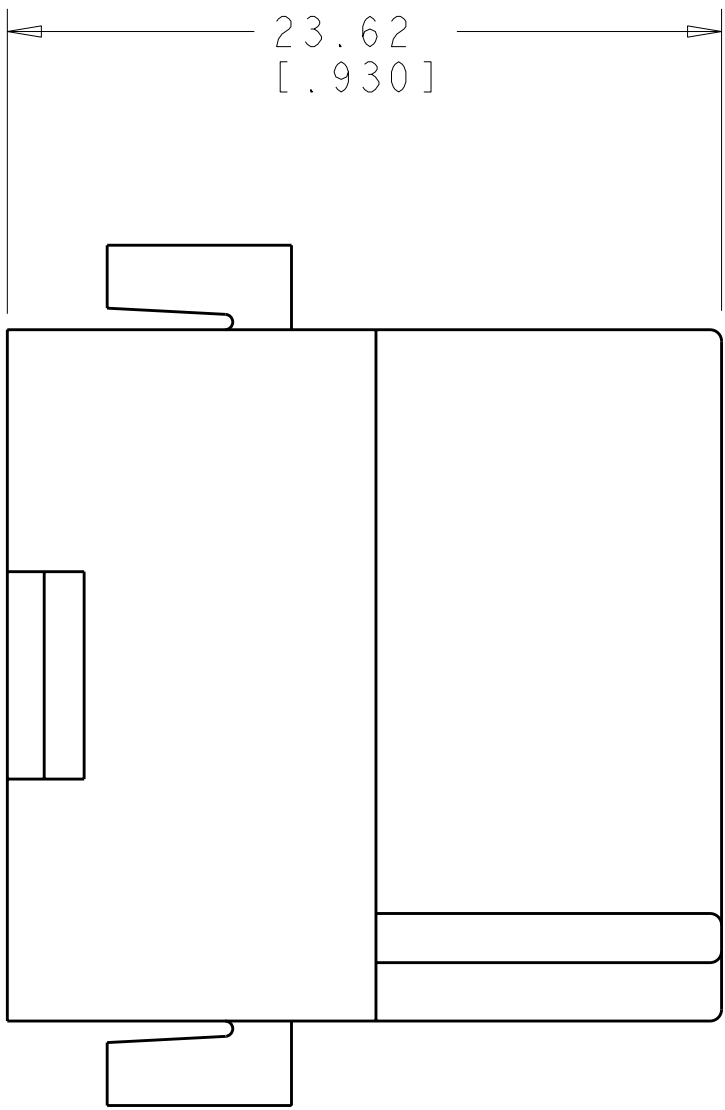
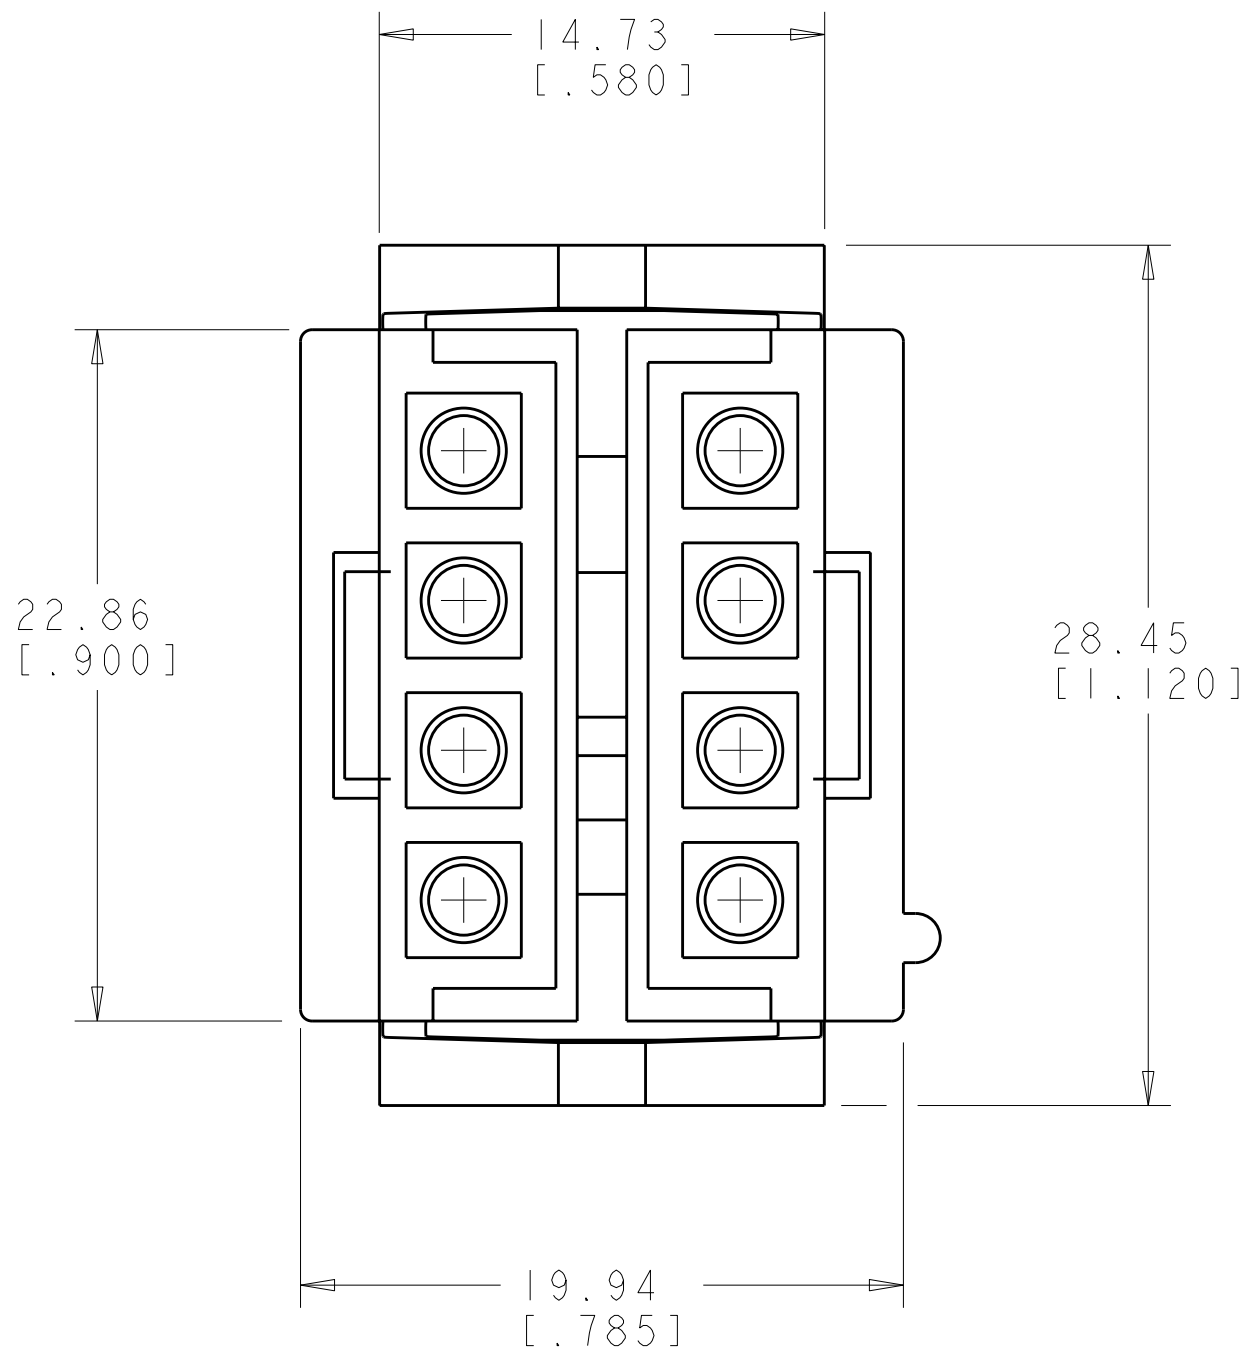
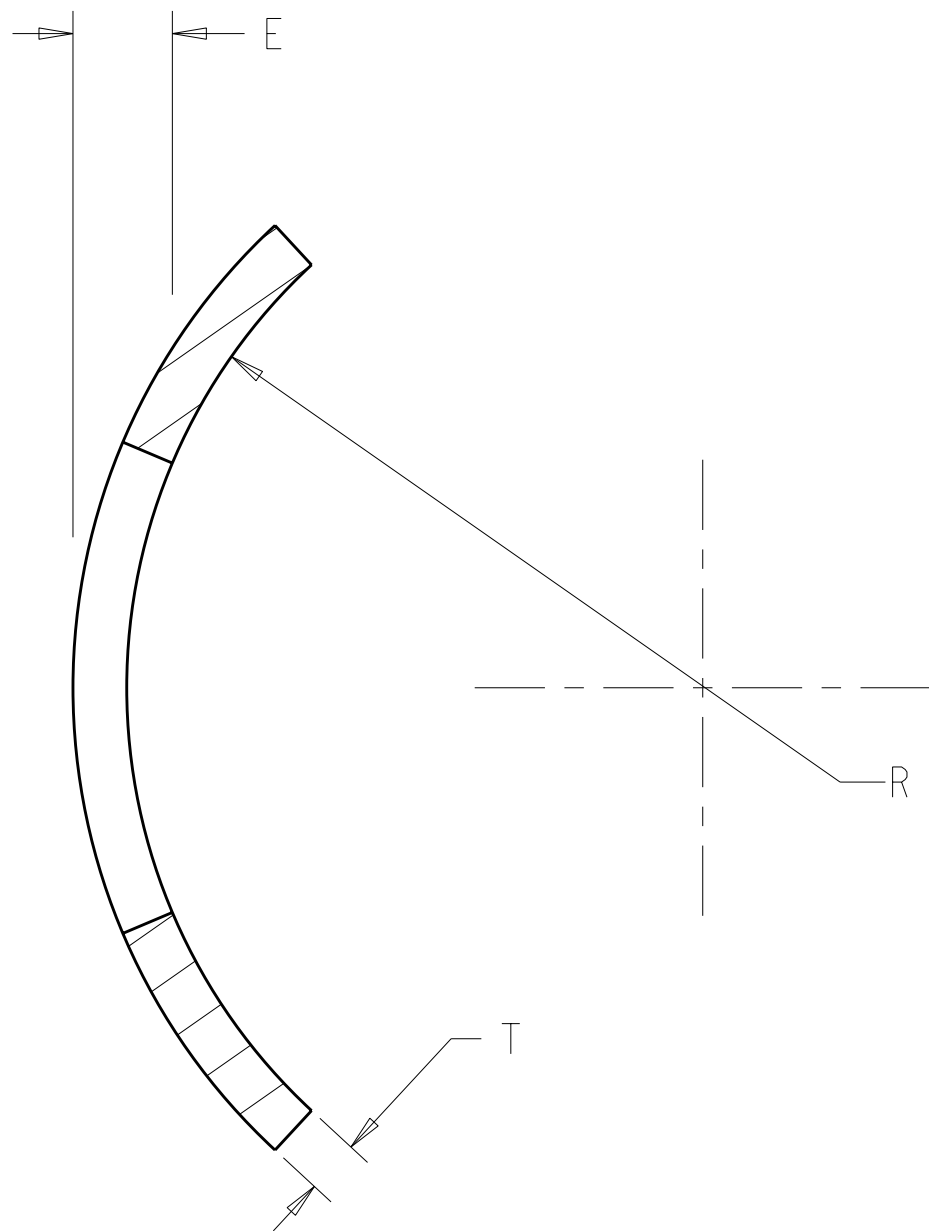



LOC		DIST		REVISIONS					
CM	00	P	LTR	DESCRIPTION		DATE	DWN	APVD	
		G		ECO-07-030154		20DEC2007	KW	CC	

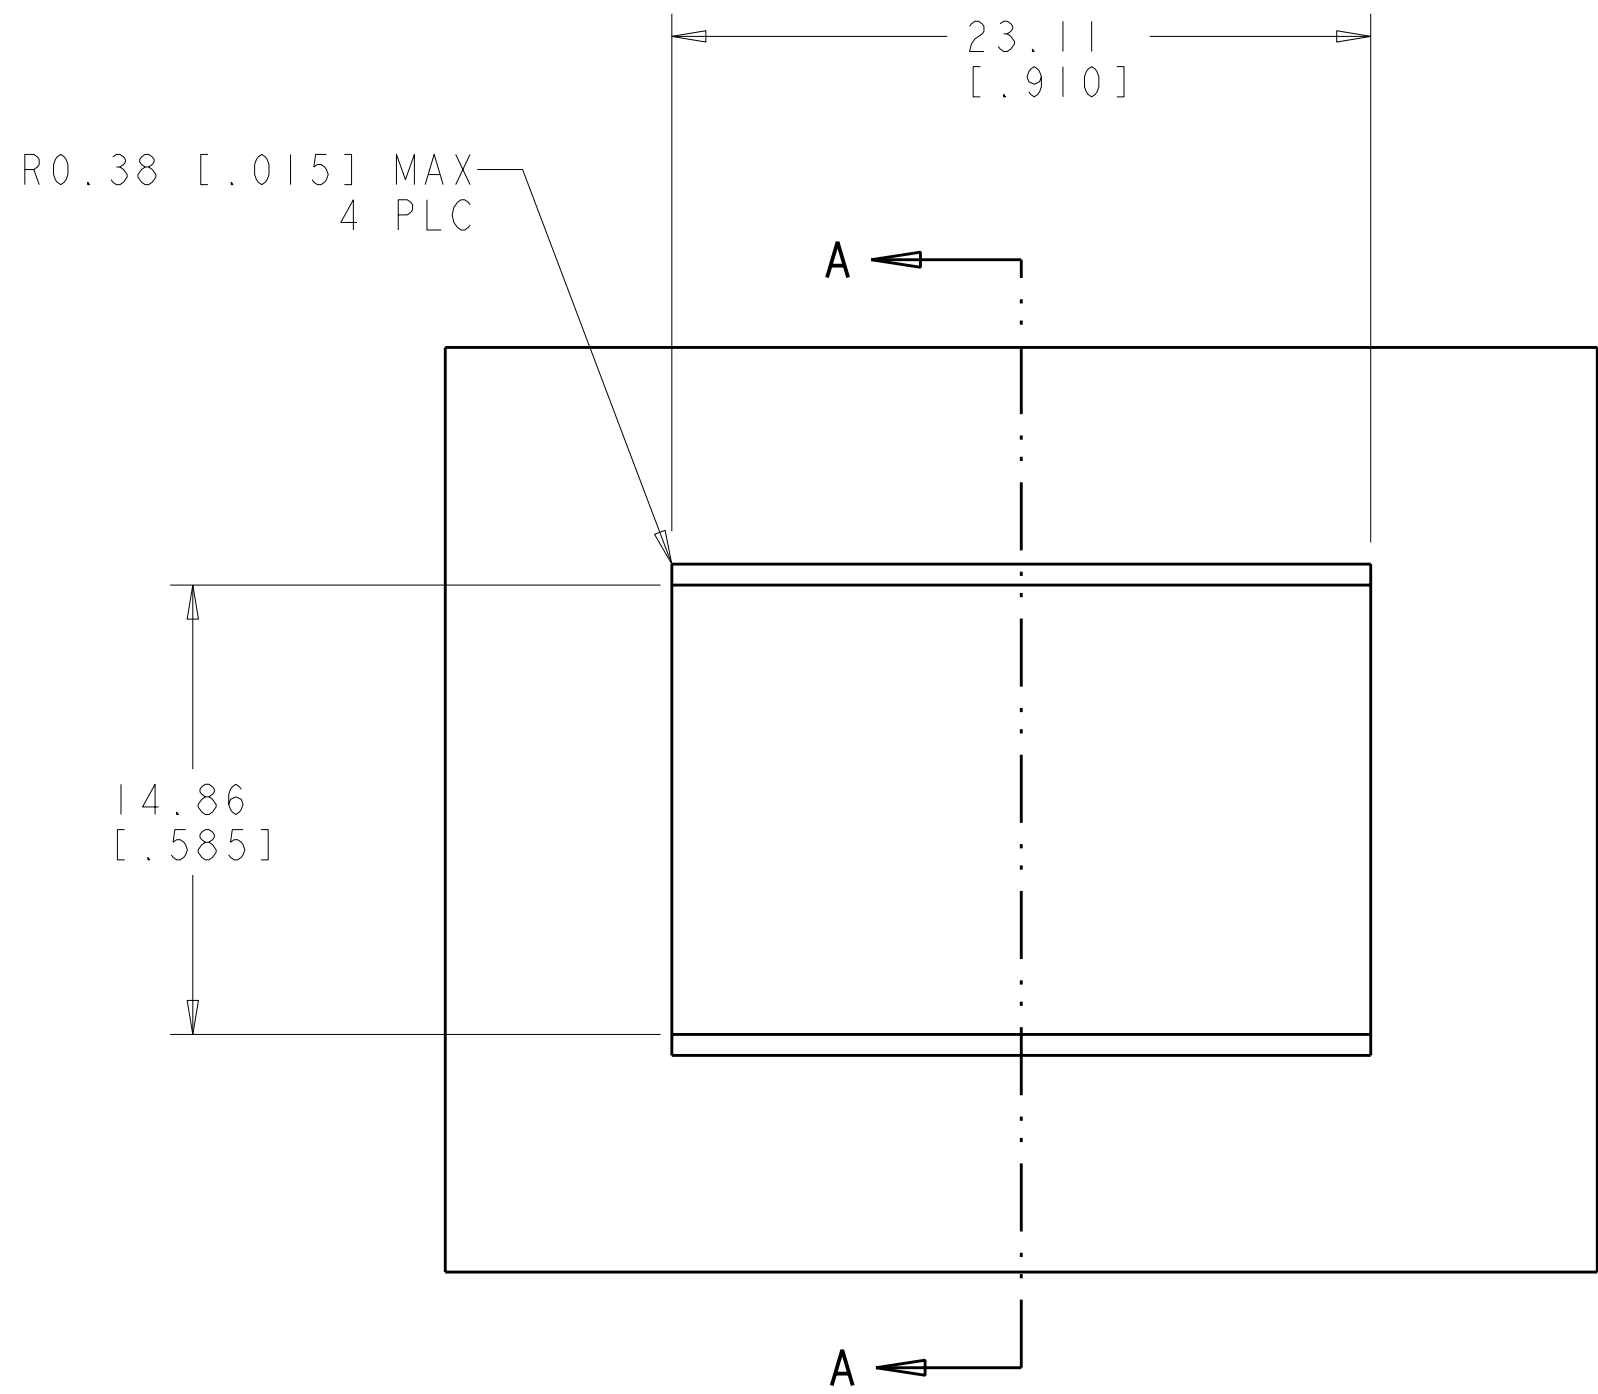

1. TO BE USED WITH COMMERCIAL MATE-N-LOK™ PINS.
2. TO BE USED WITH PLUG 480283.
3. RECOMMENDED PANEL THICKNESS "E" IS 1.02-2.54 [1.040-1.100] AND IS DEPENDENT ON "T" AND "R".
4. HOUSING MUST BE INSERTED IN A ROCKING MANNER.
5. THE PANEL MUST BE PUNCHED SO THAT THE HOUSING ENTERS THE PANEL IN THE SAME DIRECTION AS THE PUNCH.
6. MOTOR MOUNT HOUSINGS MAY BE USED IN FLAT PANELS.

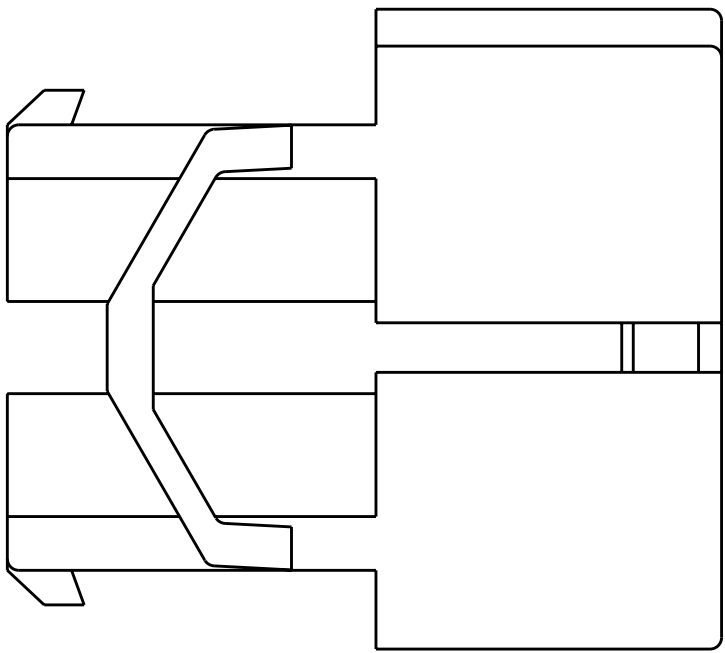

SECTION A-A

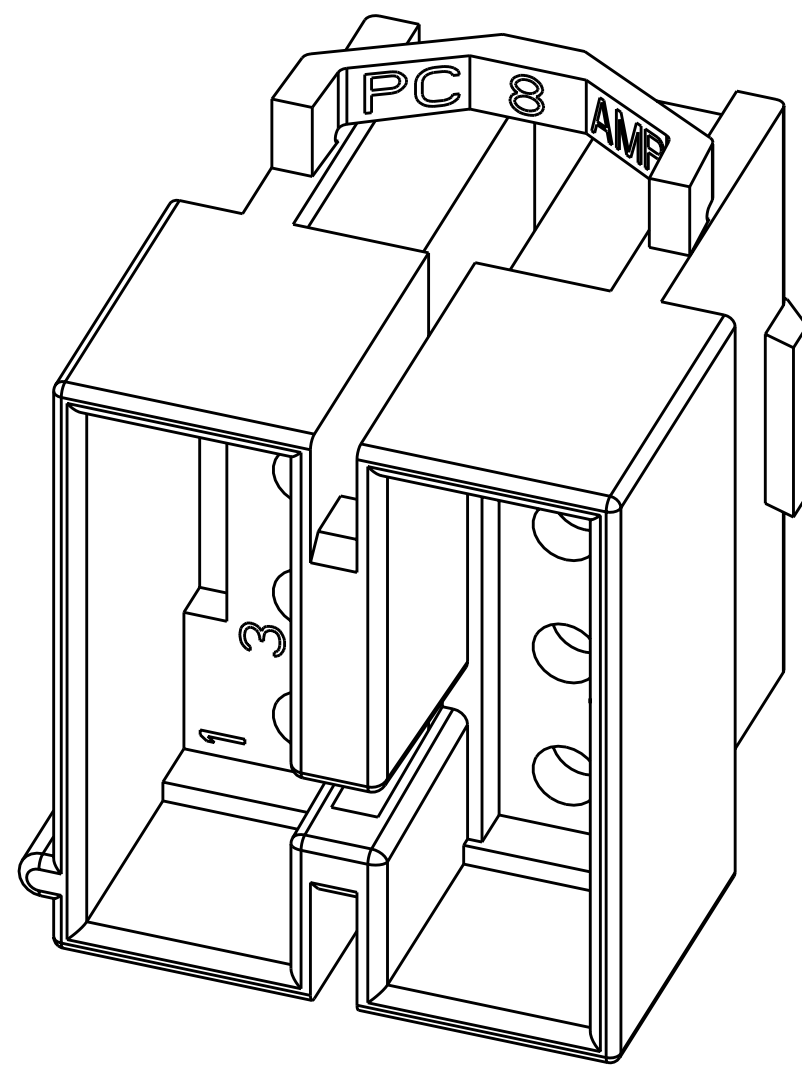

RECOMMENDED CUT OUT

0.24 IN ³	1-480284-0
VOLUME	PART NUMBER

TYCO ELECTRONICS CORPORATION 1111 E. MAIN STREET, P.O. BOX 1000, HARRISBURG, PA 17105-3608 TEL: 717/531-1000 FAX: 717/531-1001 WWW.TYCOELECTRONICS.COM		DWN R. WHITAKER 20DEC2007		Tyco Electronics Harrisburg, PA 17105-3608	
DIMENSIONS: mm [INCHES]		CHK C. CASH 20DEC2007		NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD C. CASH 20DEC2007		CAP.	
9 PLC ±		PRODUCT SPEC		6 CIRCUIT, MOTOR MOUNT,	
1 PLC ±		APPLICATION SPEC		COMMERCIAL MATE-N-LOK(TM)	
2 PLC ±0.13 [1.005]		WEIGHT		SIZE CASE CODE DRAWING NO	
3 PLC ±		CUSTOMER DRAWING		RESTRICTED TO	
4 PLC ±		SCALE		A 00779 C = 480284	
5 PLC ±		SHEET		1 OF 1	
ANGLES ±0°30'		REV		G	
FINISH		REV		G	
MATERIAL NYLON UL 94V-2 NATURAL					

