
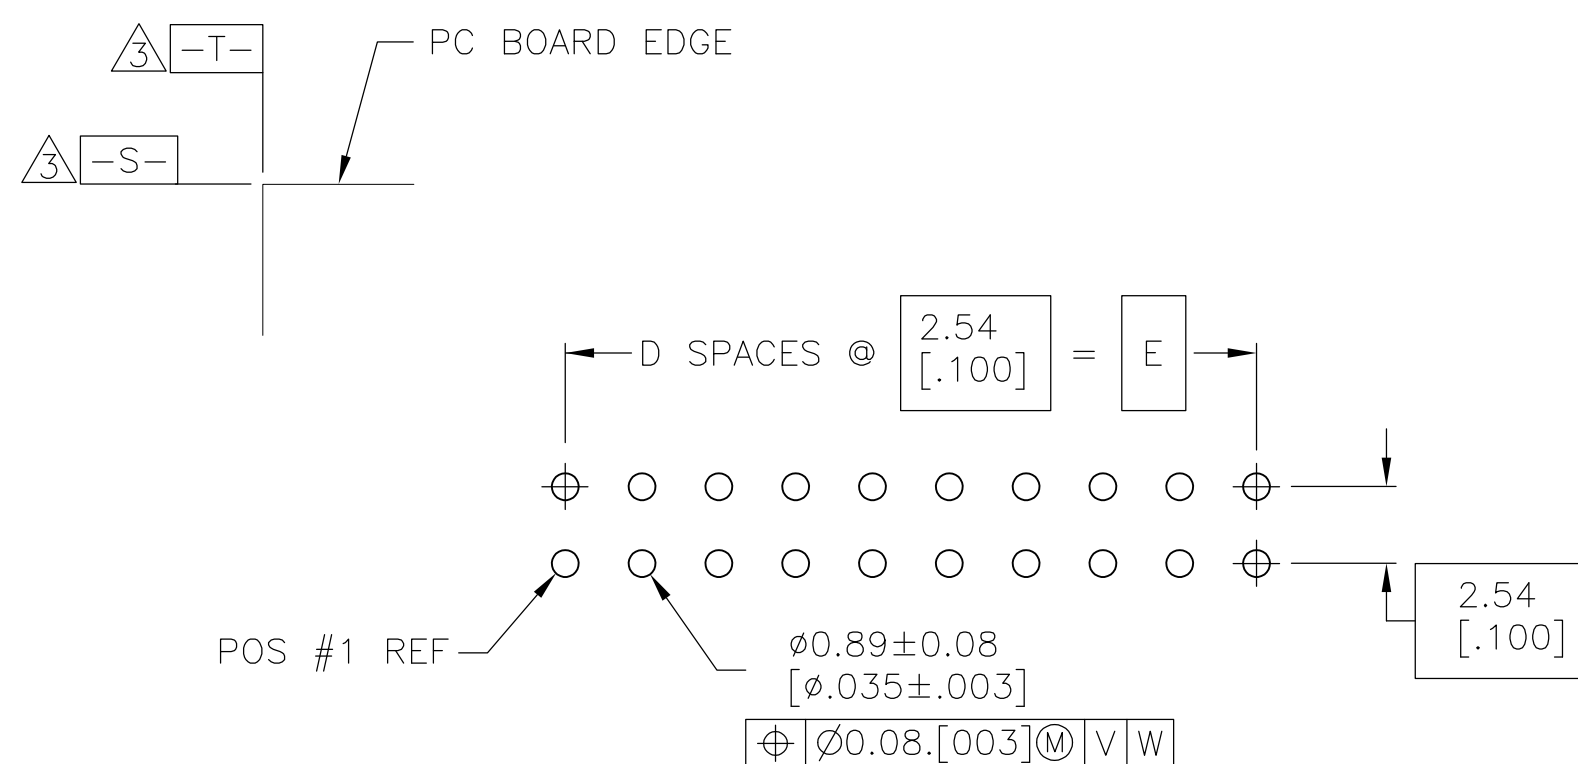
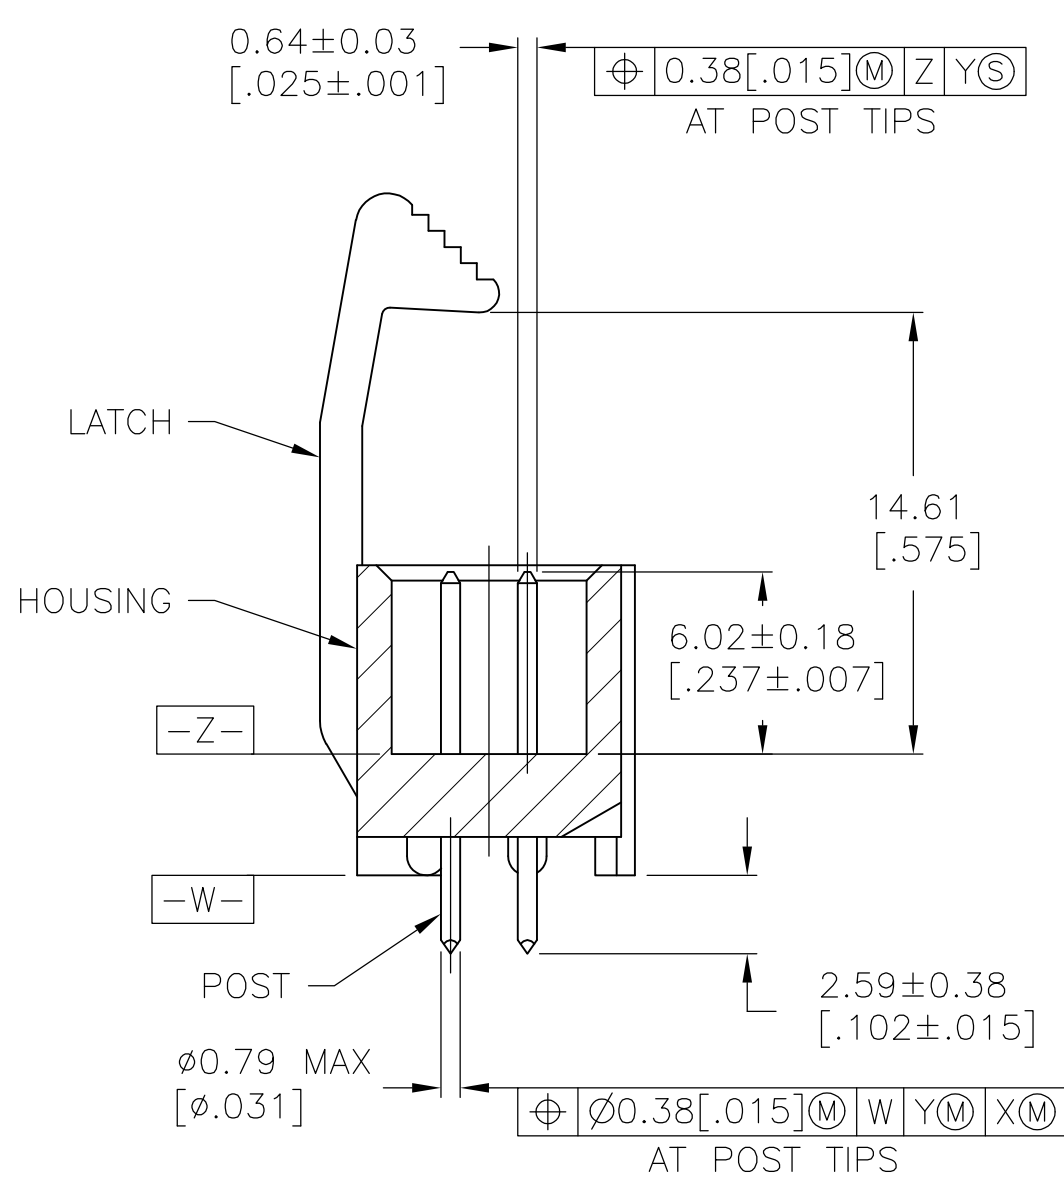
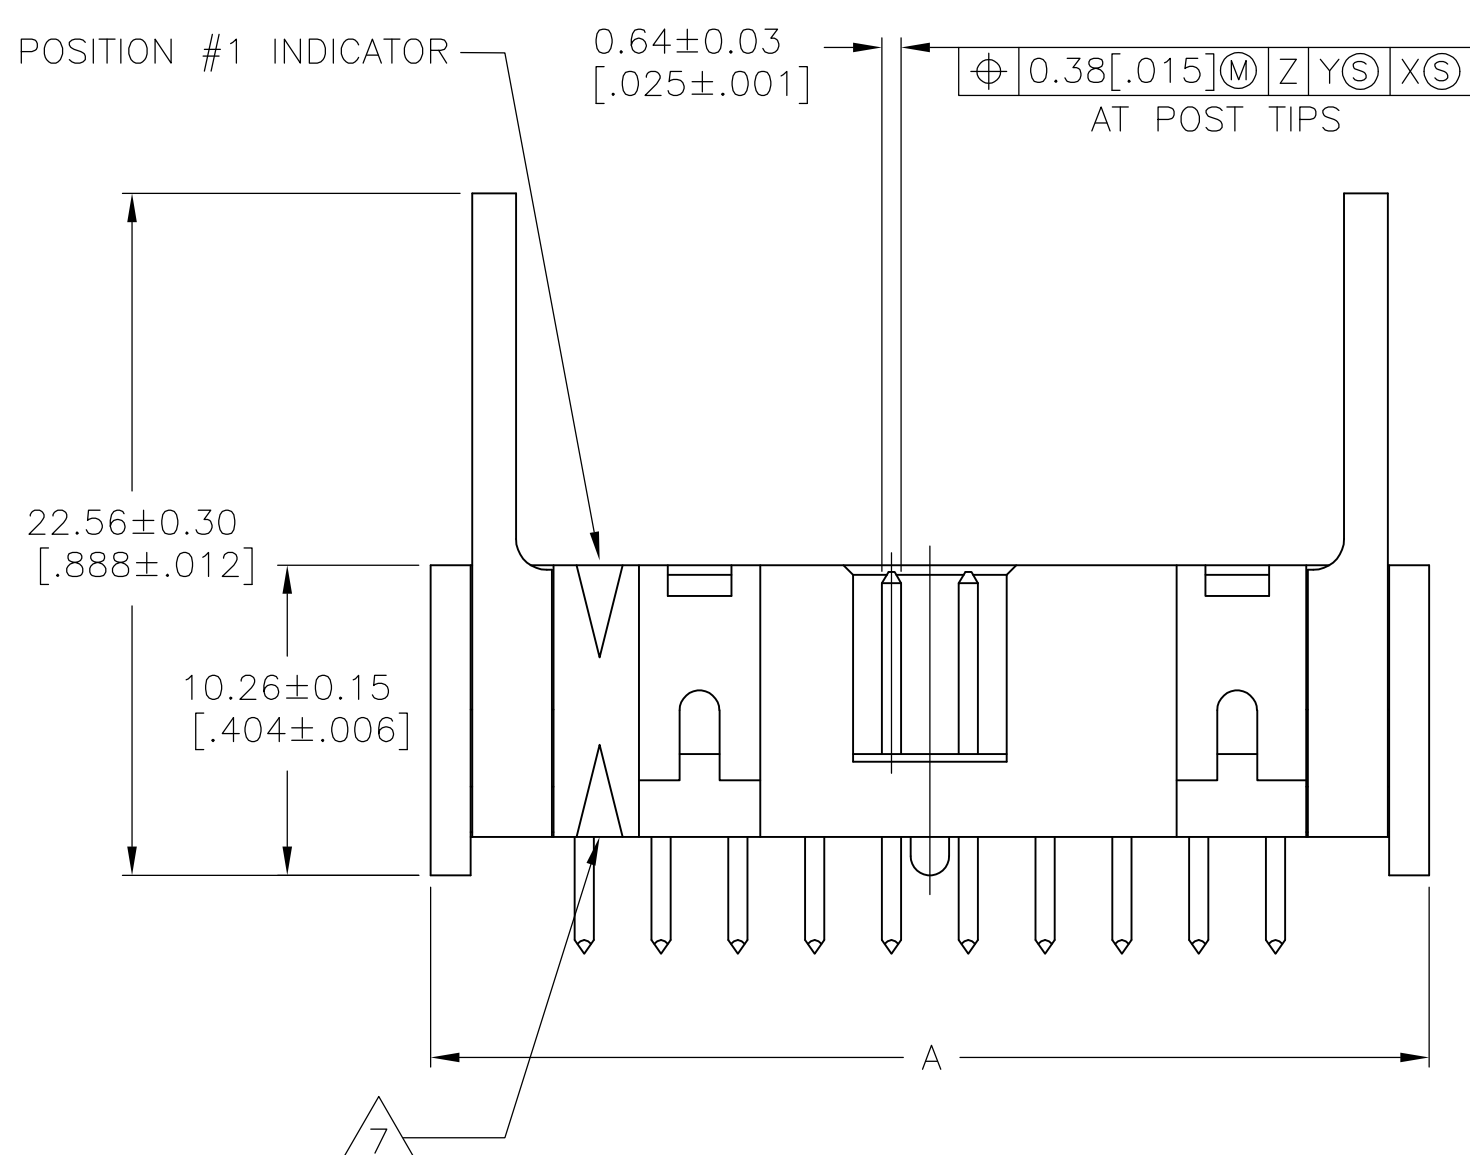


LOC	DIST	REVISIONS					
GP	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			G1	REVISED PER ECO-11-004835	11MAR11	RK	HMR

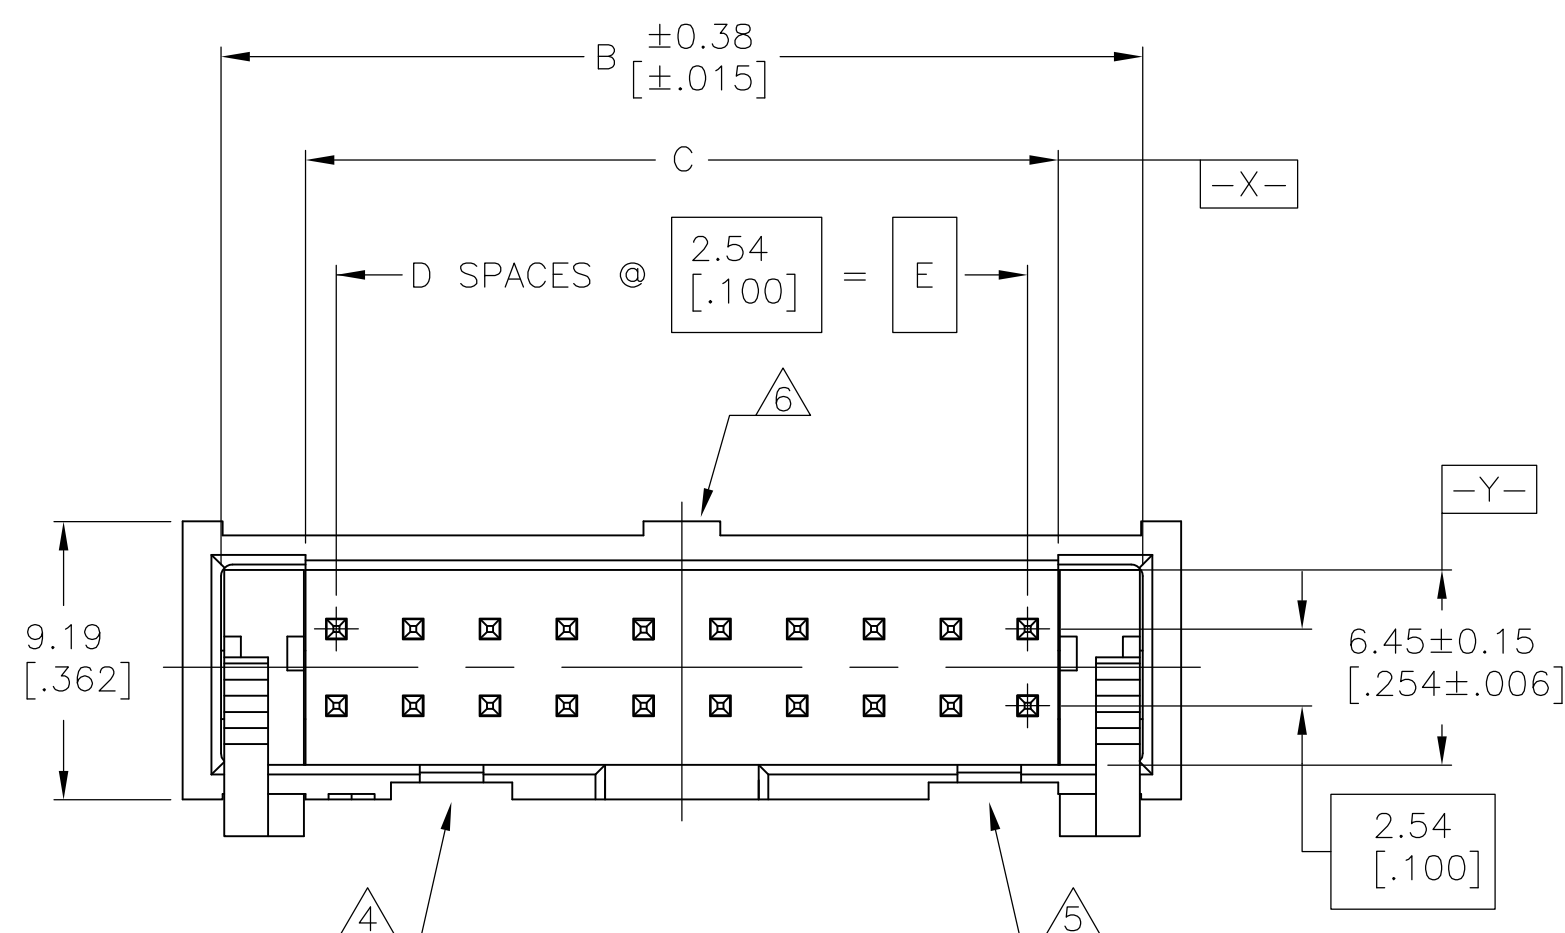

RECOMMENDED PC BOARD LAYOUT (VIEWED FROM CONNECTOR SIDE)

- ① HOUSING: PBT, UL94V-0, COLOR (SEE TABLE).
POSTS: PHOSPHOR BRONZE.
LATCHES: ZINC ALLOY.
- ② POSTS: GOLD FLASH OVER PALLADIUM-NICKEL PLATE, $0.76\mu\text{m} [0.00030]$ MIN TOTAL ON MATING AREA, $2.54\mu\text{m} [0.000100]$ MIN TIN PLATE ON SOLDER-TAIL, ALL OVER $1.27\mu\text{m} [0.00050]$ MIN NICKEL UNDERPLATE ON ENTIRE POST.
OR
 $0.76\mu\text{m} [0.00030]$ MIN GOLD PLATE ON MATING AREA, $2.54\mu\text{m} [0.000100]$ MIN TIN PLATE ON THE SOLDER-TAIL, $1.27\mu\text{m} [0.00050]$ MIN NICKEL UNDERPLATE ON THE ENTIRE POST.
LATCHES: BLACK NICKEL OVER COPPER.
- ③ DATUMS S & T TO BE ESTABLISHED BY CUSTOMER.
- ④ NO KEYING SLOT ON THIS END FOR 6, 8, 10, 12 & 14 POSITION ASSEMBLIES.
- ⑤ NO KEYING SLOT ON THIS END FOR 6, 8 & 10 POSITION ASSEMBLIES.
- ⑥ NO STANDOFF FOR 6, 8, 10, 12, 14 & 16 POSITION ASSEMBLIES.
- ⑦ ALTERNATE LOCATION/ORIENTATION OF POSITION #1 INDICATOR

	BLUE	78.74 [3.100]	31	80.77 [3.180]	86.26 [3.396]	88.90 [3.500]	64	3-1761606-7
	BLUE	73.66 [2.900]	29	75.69 [2.980]	81.18 [3.196]	83.82 [3.300]	60	3-1761606-6
	BLUE	60.96 [2.400]	24	62.99 [2.480]	68.48 [2.696]	71.12 [2.800]	50	3-1761606-5
	BLUE	48.26 [1.900]	19	50.29 [1.980]	55.78 [2.196]	58.42 [2.300]	40	3-1761606-3
OBSOLETE	BLUE	43.18 [1.700]	17	45.21 [1.780]	50.70 [1.996]	53.34 [2.100]	36	3-1761606-2
	BLUE	40.64 [1.600]	16	42.67 [1.680]	48.16 [1.896]	50.80 [2.000]	34	3-1761606-1
	BLUE	35.56 [1.400]	14	37.59 [1.480]	43.08 [1.696]	45.72 [1.800]	30	3-1761606-0
	BLUE	30.48 [1.200]	12	32.51 [1.280]	38.00 [1.496]	40.64 [1.600]	26	2-1761606-9
	BLUE	27.94 [1.100]	11	29.97 [1.180]	35.46 [1.396]	38.10 [1.500]	24	2-1761606-8
	BLUE	22.86 [.900]	9	24.89 [.980]	30.38 [1.196]	33.02 [1.300]	20	2-1761606-7
	BLUE	17.78 [.700]	7	19.81 [.780]	25.30 [.996]	27.94 [1.100]	16	2-1761606-6
	BLUE	15.24 [.600]	6	17.27 [.680]	22.76 [.896]	25.40 [1.000]	14	2-1761606-5
	BLUE	12.70 [.500]	5	14.73 [.580]	20.22 [.796]	22.86 [.900]	12	2-1761606-4
OBSOLETE	BLUE	10.16 [.400]	4	12.19 [.480]	17.68 [.696]	20.32 [.800]	10	2-1761606-3
	BLUE	7.62 [.300]	3	9.65 [.380]	15.14 [.596]	17.78 [.700]	8	2-1761606-2
	BLUE	5.08 [.200]	2	7.11 [.280]	12.60 [.496]	15.24 [.600]	6	2-1761606-1
	BLACK	73.66 [2.900]	29	75.69 [2.980]	81.18 [3.196]	83.82 [3.300]	60	1-1761606-6
	BLACK	60.96 [2.400]	24	62.99 [2.480]	68.48 [2.696]	71.12 [2.800]	50	1-1761606-5
	BLACK	48.26 [1.900]	19	50.29 [1.980]	55.78 [2.196]	58.42 [2.300]	40	1-1761606-3
	BLACK	40.64 [1.600]	16	42.67 [1.680]	48.16 [1.896]	50.80 [2.000]	34	1-1761606-1
	BLACK	35.56 [1.400]	14	37.59 [1.480]	43.08 [1.696]	45.72 [1.800]	30	1-1761606-0
	BLACK	30.48 [1.200]	12	32.51 [1.280]	38.00 [1.496]	40.64 [1.600]	26	1761606-9
	BLACK	27.94 [1.100]	11	29.97 [1.180]	35.46 [1.396]	38.10 [1.500]	24	1761606-8
	BLACK	22.86 [.900]	9	24.89 [.980]	30.38 [1.196]	33.02 [1.300]	20	1761606-7
	BLACK	17.78 [.700]	7	19.81 [.780]	25.30 [.996]	27.94 [1.100]	16	1761606-6
	BLACK	15.24 [.600]	6	17.27 [.680]	22.76 [.896]	25.40 [1.000]	14	1761606-5
	BLACK	10.16 [.400]	4	12.19 [.480]	17.68 [.696]	20.32 [.800]	10	1761606-3
	HOUSING COLOR	E	D	C	B	A	NO OF POS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN J. GERACE		03MAR05		 TE Connectivity	
DIMENSIONS: mm [INCHES]		CHK S. BOLASH		03MAR05			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APP'D M. WALMSLEY		03MAR05		NAME	
		PRODUCT SPEC				HEADER ASSEMBLY, VERTICAL, LONG EJECT LATCH, LOW PROFILE, IDC	
0 PLG ± 1 PLG ± 2 PLG ± 0.13[.005] 3 PLG ± 4 PLG ± 5 PLG ± 6 PLG ± 7 PLG ± 8 PLG ± 9 PLG ± 10 PLG ± 11 PLG ± 12 PLG ± 13 PLG ± 14 PLG ± 15 PLG ± 16 PLG ± 17 PLG ± 18 PLG ± 19 PLG ± 20 PLG ± 21 PLG ± 22 PLG ± 23 PLG ± 24 PLG ± 25 PLG ± 26 PLG ± 27 PLG ± 28 PLG ± 29 PLG ± 30 PLG ± 31 PLG ± 32 PLG ± 33 PLG ± 34 PLG ± 35 PLG ± 36 PLG ± 37 PLG ± 38 PLG ± 39 PLG ± 40 PLG ± 41 PLG ± 42 PLG ± 43 PLG ± 44 PLG ± 45 PLG ± 46 PLG ± 47 PLG ± 48 PLG ± 49 PLG ± 50 PLG ± 51 PLG ± 52 PLG ± 53 PLG ± 54 PLG ± 55 PLG ± 56 PLG ± 57 PLG ± 58 PLG ± 59 PLG ± 60 PLG ± 61 PLG ± 62 PLG ± 63 PLG ± 64 PLG ± 65 PLG ± 66 PLG ± 67 PLG ± 68 PLG ± 69 PLG ± 70 PLG ± 71 PLG ± 72 PLG ± 73 PLG ± 74 PLG ± 75 PLG ± 76 PLG ± 77 PLG ± 78 PLG ± 79 PLG ± 80 PLG ± 81 PLG ± 82 PLG ± 83 PLG ± 84 PLG ± 85 PLG ± 86 PLG ± 87 PLG ± 88 PLG ± 89 PLG ± 90 PLG ± 91 PLG ± 92 PLG ± 93 PLG ± 94 PLG ± 95 PLG ± 96 PLG ± 97 PLG ± 98 PLG ± 99 PLG ± 100 PLG ±		APPLICATION SPEC				SIZE	
MATERIAL		WEIGHT		—		CAGE CODE	
FINISH		DRAWING NO		A1 00779		RESTRICTED TO	
				SCALE		4:1	
CUSTOMER DRAWING		SHEET		1 of 1		REV	
						G	