


LOC —	DIST —	REVISIONS					
		P	LTR	DESCRIPTION	DATE	OWN	APVD
			B1	ECR-07-020339	30AUG2007	RC	MS
			C	ECN 8000017738 - REBRANDING	22NOV2016	LS	OV

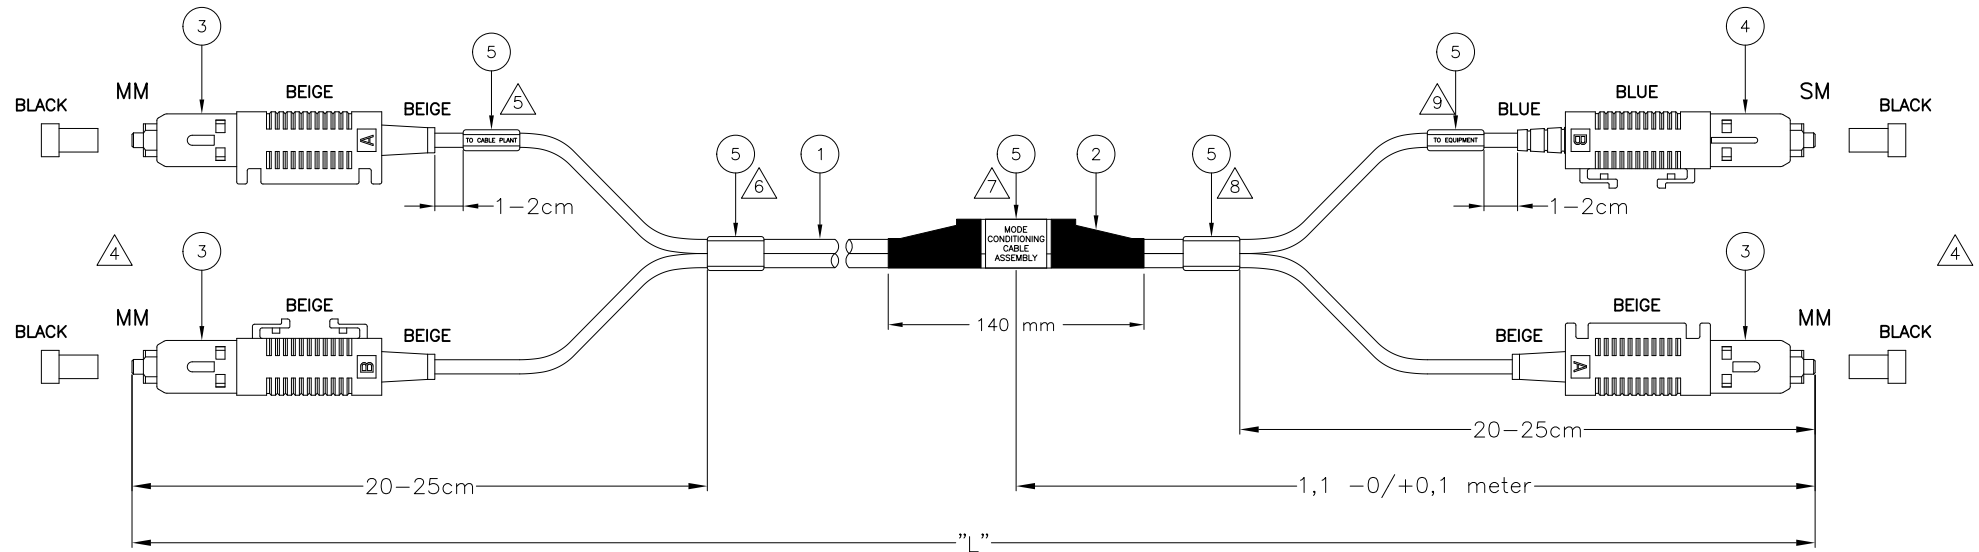

NOTES:

- CPR IS 34dB ACCORDING TO IEEE DRAFT P802.3Z/D5.0
- ATTENUATION $\leq 0,3\text{dB}$, MEASURED AT 1300nm
ACC. IEC 61300-3-4 METHOD B
- FILLED OUT TEST RESULT SHEET IS SUPPLIED
WITH EACH INDIVIDUALLY PACKED ASSEMBLY
- INDIVIDUAL LENGTH DIFFERENCE ON BOTH SIDES $\leq 5\text{mm}$
- TEXT ON CABLE LABEL: "TO CABLE PLANT"
- INFORMATION ON CABLE LABEL:
 - F.O. NUMBER
 - PRODUCTION DATE
- TEXT ON CABLE LABEL: "MODE CONDITIONING CABLE ASSEMBLY"
- INFORMATION ON CABLE LABEL:
 - BARCODE
 - UNIQUE SERIAL NUMBER
 - COMMSCOPE PART NUMBER
 - MANUFACTURING LOCATION
 - PRODUCTION DATE
- TEXT ON CABLE LABEL: "TO EQUIPMENT"

PART NUMBER	"L" (meter)
6206821-2	2,2 -0/+0,1
6206821-3	3,2 -0/+0,1
6206821-4	4,2 -0/+0,1
6206821-5	5,2 -0/+0,1
6206821-6	6,2 -0/+0,1
6206821-7	7,2 -0/+0,1
6206821-8	8,2 -0/+0,1
6206821-9	9,2 -0/+0,1
1-6206821-0	10,2 -0/+0,1

5	FOAC CABLE LABEL	5			
1	SC CONNECTOR SINGLE MODE, DUPLEX HOUSING, BLUE	4			
3	SC CONNECTOR MULTI MODE, DUPLEX HOUSING, BEIGE	3			
1	CPR SLEEVE	2			
1	FOCAB 2,5TZ 62.5/125 ORANGE LSZH	1			
Qty	Description	Item			
THIS DRAWING IS A CONTROLLED DOCUMENT.					
DWN R. COOLEN 24FEB2006		COMMScope, INC.			
CHK A. HENGELMOLEN 24FEB2006					
APVD T. vd. MEULEN 24FEB2006					
PRODUCT SPEC 108-19168					
APPLICATION SPEC		NAME FOGBIT62.5 MCLL 2.5TZ SC/PC DUPLEX - SC/PC DUPLEX			
—					
MATERIAL		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
—		A2	—	C=6206821	—
DIMENSIONS: mm		CUSTOMER DRAWING			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		SCALE NTS SHEET 1 of 1 REV C			
0 PLC ± -					
1 PLC ± -					
2 PLC ± -					
3 PLC ± -					
4 PLC ± -					
ANGLES ± -					
FINISH					
—					