

PRODUCT SPECIFICATION

CRIMPING EXTRUDED RING TERMINALS

1. SCOPE

This specification covers the crimp requirements for extruded ring terminals.

2. CRIMP REQUIREMENTS

2.1. Figure 1 illustrates the various features defined in the following paragraphs.

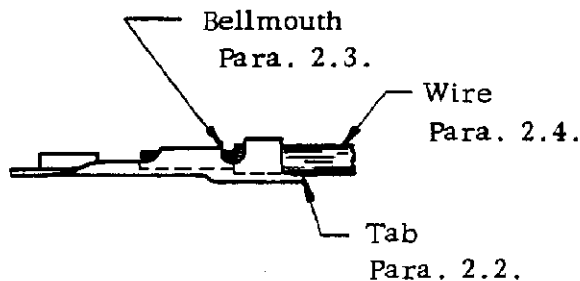


FIG. 1

2.2. Tab on back end of terminal shall be .020 maximum.

2.3. Bellmouth at back of wire barrel shall be .005 to .030.

2.4. Wire shall lay flat and must extend through wire barrel with no more than 3/64 inch maximum overhang.

2.5. Crimp heights and crimp width of the wire barrel and crimp width of the insulation barrel are shown in the following table:

AMP Part No.	Wire Barrel			Insulation Barrel
	Wire Size	Crimp Height ±.002	Crimp Width	Crimp Width
40894	18	.056	.110 "F"	.140 "F"
	20	.053		

TABLE 1

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN AMP PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM AMP INCORPORATED, HARRISBURG, PA.

NUMBER 108-16001

—H—

AMP SECURITY CLASSIFICATION

PRINT DIST				DR <i>R. Luettich</i> 6-19-70	<b>AMP</b> AMP INCORPORATED HARRISBURG, PENNA.	LOC B	NO. <b>A</b>	108-16001	REV 0
				CHK <i>G. Yetter</i> 6-19-70					
					APP <i>R.P. Frantz</i> 6-19-70				
	1	REVISION RECORD	DR	CHK	DATE	SHEET 1 OF 1 NAME Crimping Extruded Ring Terminals			