
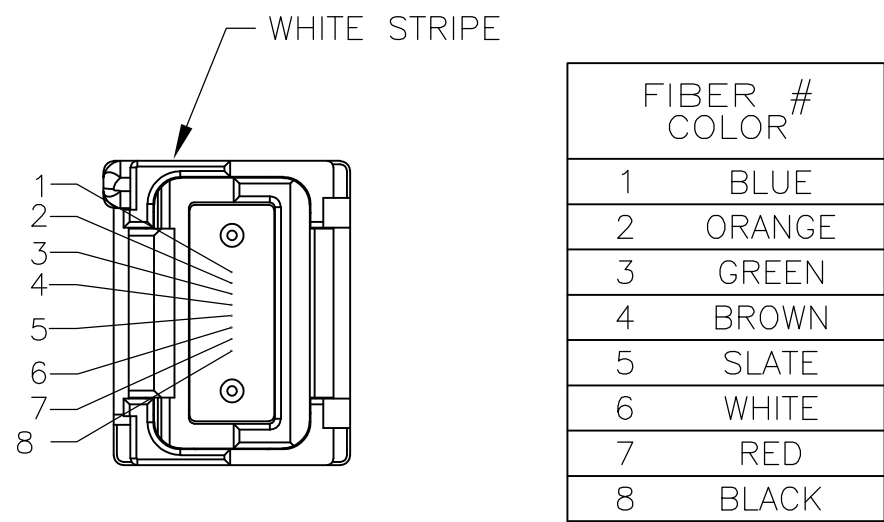


1. MAXIMUM INSERTION LOSS: 0.5dB RANDOM MATE
2. PART SHIPPED WITH PIECE OF TAPE TO HOLD FIBER BUFFERS IN PLACE. TAPE TO BE REMOVED AFTER TERMINATING BUFFERED FIBER END OF ASSEMBLY.
3. PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TYCO ELECTRONICS STANDARD 230-702

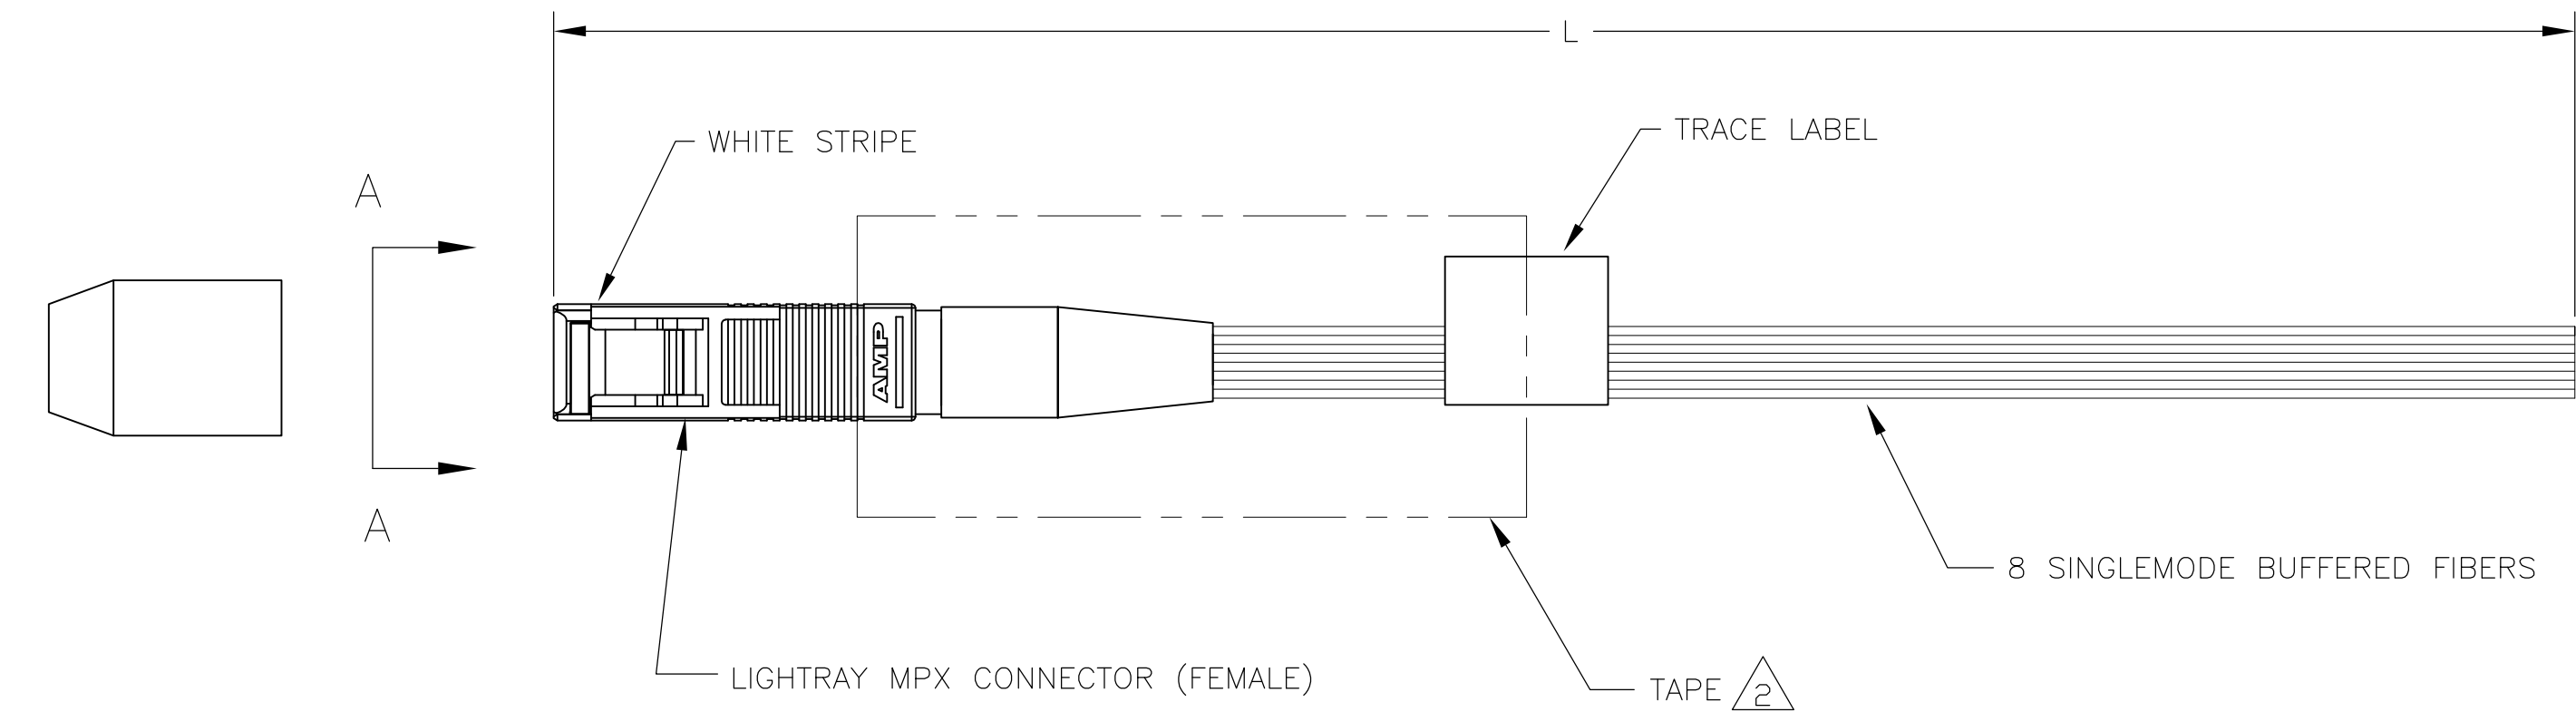

VIEW A-A

LIGHTRAY MPX CONNECTOR FIBER PATH

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN KATHY HE 10FEB06	1.00±0.05 [39.4±2.0]		6457174-1	
DIMENSIONS: METERS [INCHES]		CHK J. BARRY 10FEB06	L METERS [INCHES]		PART NUMBER	
		APVD J. BARRY 10FEB06	NAME Tyco Electronics Corporation Harrisburg, PA 17105-3608			
		PRODUCT SPEC	SIZE A2			
		APPLICATION SPEC	CAGE CODE 00779			
		WEIGHT -	DRAWING NO 6457174			
MATERIAL -	FINISH -	CUSTOMER DRAWING		SCALE NTS	SHEET 1 OF 1	REV B