


Power PCB Relay Card E

- 1 pole 8A, 1 form C (CO) or 1 form A (NO) contact
- 4kV coil-contact
- Vertical and horizontal version
- Wash tight
- RoHS compliant (Directive 2011/65/EC)

Typical applications
I/O modules, heating control, timers



Approvals

VDE Cert. No. 5146, UL E214025
Technical data of approved types on request

Contact Data	8A	5A	bifurcated
Contact arrangement	1 form C (CO) or 1 form A (NO)		
Rated voltage		250VAC	
Max. switching voltage		400VAC	
Rated current	8A	5A	5A
Limiting making current, max 4 s, duty factor 10%	15A	-	-
Breaking capacity max.	2000VA	1250VA	1250VA
Contact material	AgCdO, AgNi20	AgNi0.15	AgNi0.15
Contact style	single contact	single contact	bifurcated contact
Frequency of operation, with/without load	360/72000h ⁻¹		
Operate/release time typ.	7/3ms		
Bounce time typ., form A/form B	0.5/3ms		

Contact ratings

Type	Contact	Load	Cycles
IEC61810			
AgCdO	C (CO)	8A, 250VAC, resistive, 70°C	20x10 ³
AgNi20	C (CO)	8A, 250VAC, resistive 70°C	20x10 ³
AgCdO	A (NO)	8A, 250VAC, resistive, 70°C	20x10 ³
AgNi20	A (NO)	8A, 250VAC, resistive, 70°C	30x10 ³
AgNi0.15	A (NO)	5A, 250VAC, resistive, 70°C	20x10 ³

Mechanical endurance >20x10⁶ operations

Coil Data

Coil voltage range 6 to 110VDC


Coil versions, DC coil

Coil code	Rated voltage VDC	Operate voltage VDC	Release voltage VDC	Coil resistance $\Omega \pm 15\%$ ¹⁾	Rated coil power mW
001	6	4.2	0.6	80 ¹⁾	450
002	12	8.3	1.2	330 ¹⁾	436
006	24	16.8	2.4	1200	480
013	48	33.6	4.8	4700	490
023	60	42.0	6.0	7200	500
028	110	77.0	11.0	23400	517

1) Coil resistance $\pm 10\%$.

All figures are given for coil without pre-energization, at ambient temperature +23°C.


Coil operating range DC

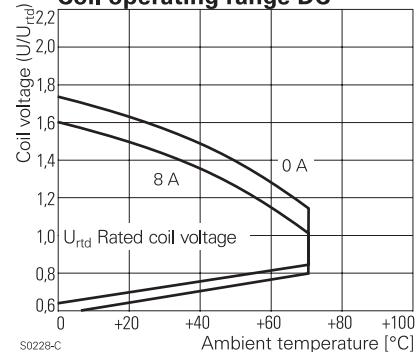

Other coil voltages on request.

Insulation Data

Initial dielectric strength	
between open contacts	1000V _{rms}
between contact and coil	4000V _{rms}
Clearance/creepage	
between contact and coil	≥4/4mm
Material group of insulation parts	IIla
Tracking index of relay base	PTI225V

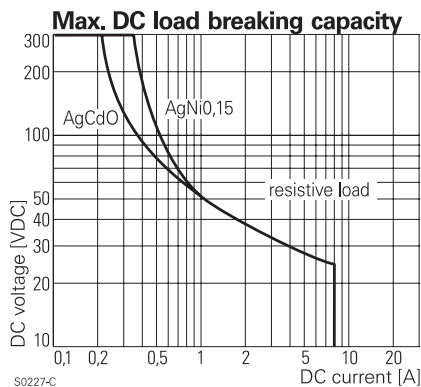

Power PCB Relay Card E (Continued)

Other Data


Material compliance: EU RoHS/ELV, China RoHS, REACH, Halogen content refer to the Product Compliance Support Center at www.te.com/customersupport/rohssupportcenter

Ambient temperature	-40 to +70°C
Category of environmental protection	RTIII - wash tight
IEC 61810	
Terminal type	PCB-THT
Mounting distance	5mm
Weight	14g
Resistance to soldering heat THT	
IEC 60068-2-20	260°C/5s
Packaging/unit	tube/20 pcs., box/400 pcs.


PCB layout / terminal assignment

Bottom view on solder pins

Vertical version

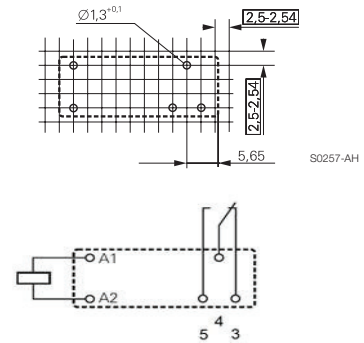


Horizontal version

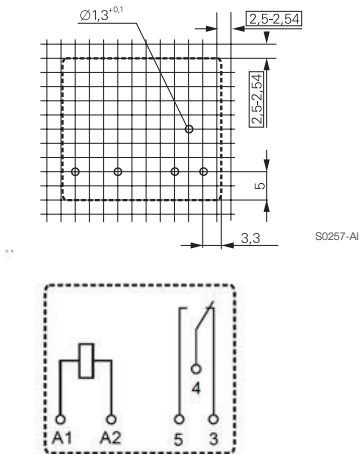


Dimensions

Vertical version

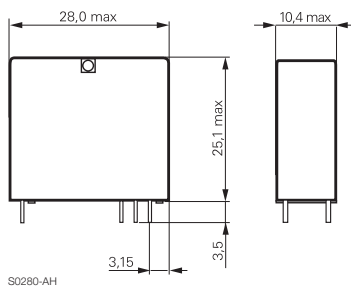

S0280-AH

Horizontal version

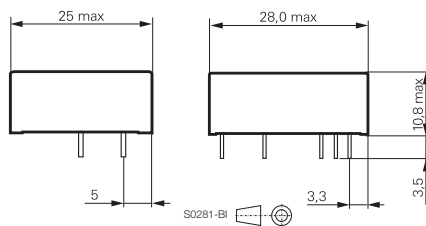

S0281-BI

Power PCB Relay Card E (Continued)

Product code structure

Typical product code

V23057 -A 0 006 -A 1 01

Type

V23057 Power PCB Relay Card E

Version

A Horizontal
B Vertical

Version

0 Standard (nature white)

Coil

Coil code: please refer to coil versions table

Contact set

A Single contact

Contact material

1 AgNi 0.15
2 AgNi 20
4 AgCdO

Contact configuration

01 1 form C contact (1 CO)
02 1 form A contact (1 NO)

Product code	Version	Contact arrangement	Contact material	Coil	Part Number
V23057-A0002-A101	Horizontal	1 form C (CO) contact	AgNi 0.15	12VDC	1393215-4
V23057-A0002-A401			AgCdO		1393215-9
V23057-A0006-A101			AgNi 0.15	24VDC	2-1393215-1
V23057-A0006-A201			AgNi 20		2-1393215-3
V23057-A0006-A401			AgCdO		2-1393215-5
V23057-B0001-A101	Vertical		AgNi 0.15	6VDC	6-1393215-6
V23057-B0002-A101				12VDC	6-1393215-7
V23057-B0002-A201			AgNi 20		6-1393215-9
V23057-B0002-A401			AgCdO		7-1393215-1
V23057-B0006-A101			AgNi 0.15	24VDC	7-1393215-5
V23057-B0006-A102		1 form A (NO) contact			7-1393215-9
V23057-B0006-A201		1 form C (CO) contact	AgNi 20		8-1393215-1
V23057-B0006-A401			AgCdO		8-1393215-5
V23057-B0006-A402		1 form A (NO) contact			8-1393215-6
V23057-B0023-A201		1 form C (CO) contact	AgNi 20	60VDC	2-1415543-8

This list represents the most common types and does not show all variants covered by this data sheet.
Other types on request