THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION –,– .
© COPYRIGHT – BY TYCO ELECTRONICS CORPORATION. ALL INTERNATIONAL RIGHTS RESERVED.

LOC	DIST
G	14

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	G1	REV PER ECR 09–023200	27OCT09	JR	TM

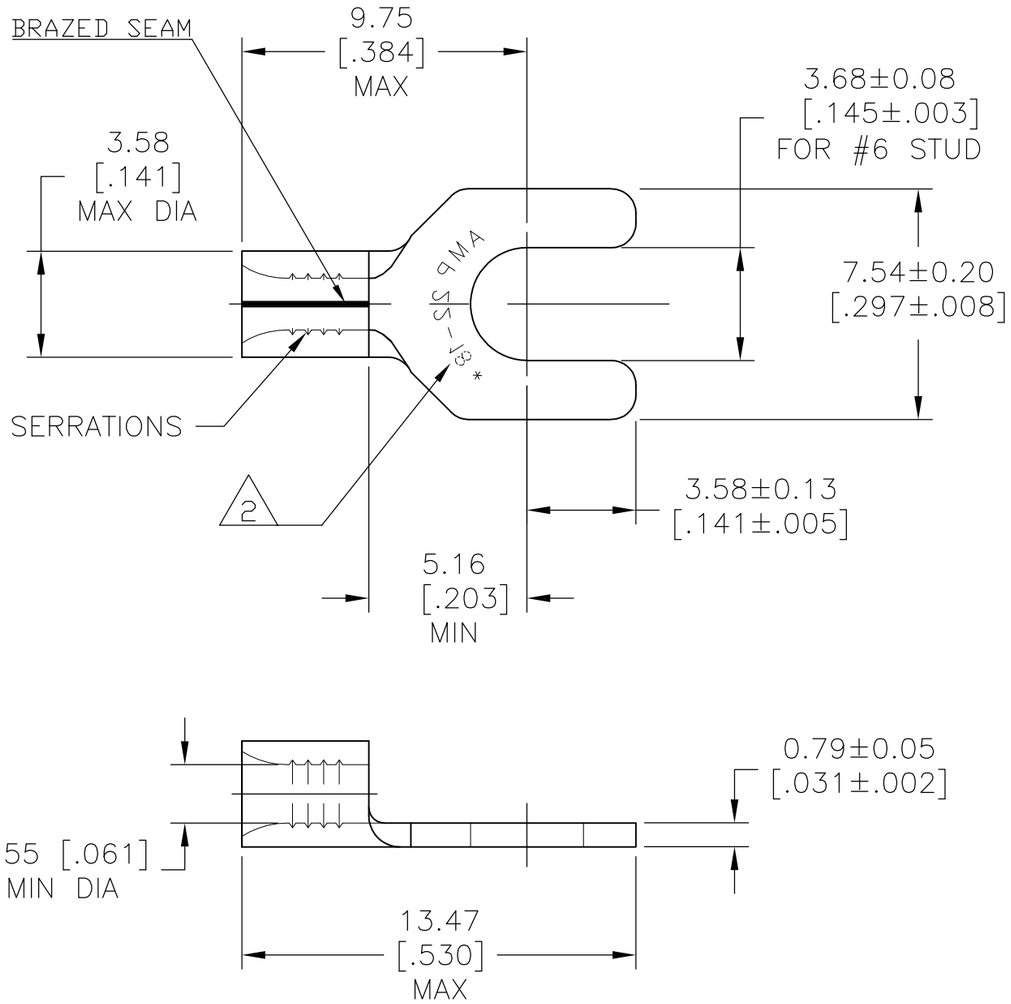

AMP WIRE RANGE	Listed FILE E13288	LR7189 Certified
22–16 AWG SOLID OR STRANDED	22–16 AWG SOLID OR STRANDED	22–16 AWG SOLID OR STRANDED

1 HEAT TREATMENT: ANNEALED

2 STAMP AMP 22–18*, APPROX AS SHOWN 22–16 TERMINALS ARE STAMPED 22–18 IN ACCORDANCE WITH MILITARY SPEC MIL–T–7928, COMMERCIAL WIRE RANGE IS 22–16.

3 COPPER PER ASTM B–152

4 0.00254 [.000100] MIN THK TIN PLATE PER ASTM B–545

QTY	PACKAGING TYPE	PART NO
100	LOOSE PIECE, BOX	8–36195–1
5000	ON TAPE	2–36195–3
––	LOOSE PIECE	36195

AMP INCORPORATED
CUSTOMER SERVICE SYSTEMS

FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1–800–522–6752
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1–800–722–1111
FOR ORDER ENTRY	1–800–526–5142

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

MAX RECOMMENDED OPERATING TEMPERATURE: 170°C MAX

VOLTAGE RATING: N/A

CIRCULAR MIL AREA: 0.26–1.65mm² [509–3,260] SOLID OR STRANDED

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	± –
1 PLC	± –
2 PLC	± 0.20 [.008]
3 PLC	± –
4 PLC	± –
ANGLES	± –

MATERIAL 3 FINISH 4

DWN	TA BRINKMAN	3/26/93
CHK	DA PATTERSON	3–26–93
APVD	JL MECKLEY	3–26–93
PRODUCT SPEC	—	
APPLICATION SPEC	—	
WEIGHT	—	

Tyco Electronics
Tyco Electronics Corporation
Harrisburg, PA 17105–3608

NAME: WIRE TERMINAL SPADE TONGUE –

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C–36195	—

CUSTOMER DRAWING | SCALE 5:1 | SHEET 1 OF 1 | REV G1

1470–19 (1/08)