


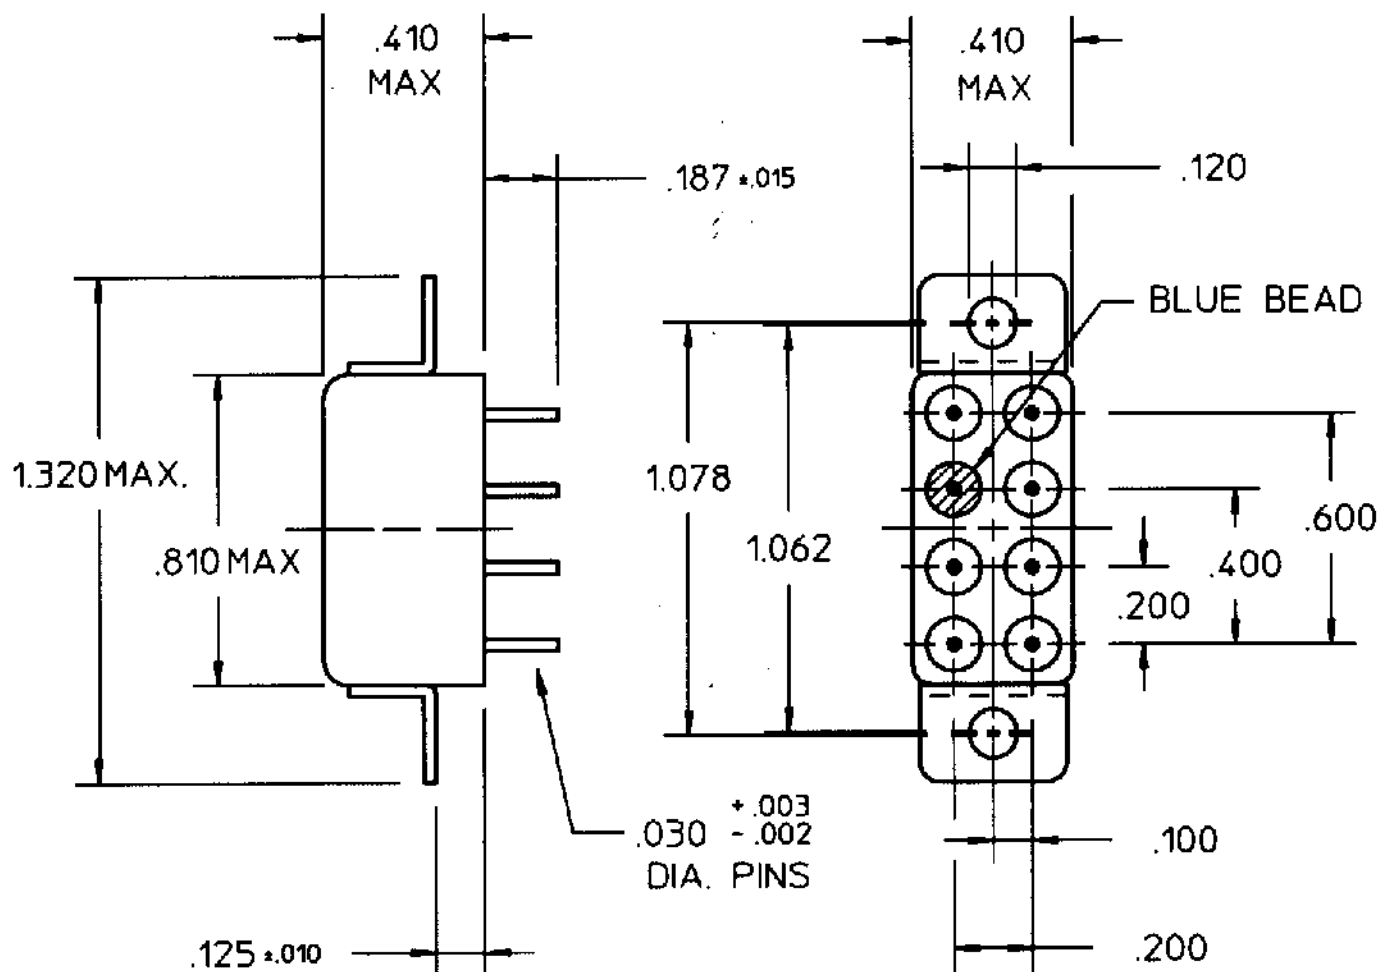

COIL: @ +25 °C

RESISTANCE 700 OHMS ± 10%

NOMINAL VOLTAGE 26.5 VDC

MUST OPERATE 15.0 VDC

MUST RELEASE 8.0 VDC MAX 1.5 VDC MIN

ENVIRONMENT:

VIBRATION 10 CPS TO 3000 CPS @ 30 g's


SHOCK 100 g's 6 ± 1 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: MAXIMUM TRANSIENT SUPPRESSED VOLTAGE OF -48 VDC WITH BIFILAR COIL

CUSTOMER DATA SHEET

BLUE BEAD

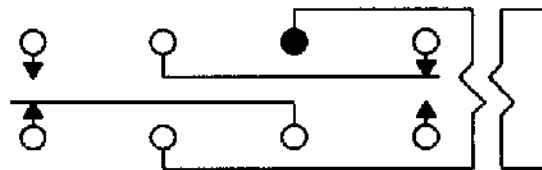

CONTACT RATING: LOW LEVEL TO 2A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 2/8/93 CK. 2/8/93 gms

**COMMUNICATIONS
INSTRUMENTS, INC.**

CUST. OPL
CUST. NO. M39016/22-005L

TYPE "HMB" RELAY

HMB1230K01L