

TLV2361, TLV2362 HIGH-PERFORMANCE LOW-VOLTAGE OPERATIONAL AMPLIFIERS


SLOS195H – FEBRUARY 1997 – REVISED JUNE 2007

- **Low Supply-Voltage Operation** . . . $V_{CC} = \pm 1 \text{ V Min}$
- **Wide Bandwidth** . . . 7 MHz Typ at $V_{CC\pm} = \pm 2.5 \text{ V}$
- **High Slew Rate** . . . 3 V/ μs Typ at $V_{CC\pm} = \pm 2.5 \text{ V}$
- **Wide Output Voltage Swing** . . . $\pm 2.4 \text{ V Typ}$ at $V_{CC\pm} = \pm 2.5 \text{ V}$, $R_L = 10 \text{ k}\Omega$
- **Low Noise** . . . 8 nV/ $\sqrt{\text{Hz}}$ Typ at $f = 1 \text{ kHz}$


description/ordering information

The TLV236x devices are high-performance dual operational amplifiers built using an original Texas Instruments bipolar process. These devices can be operated at a very low supply voltage ($\pm 1 \text{ V}$), while maintaining a wide output swing. The TLV236x devices offer a dramatically improved dynamic range of signal conditioning in low-voltage systems. The TLV236x devices also provide higher performance than other general-purpose operational amplifiers by combining higher unity-gain bandwidth and faster slew rate. With their low distortion and low-noise performance, these devices are well suited for audio applications.

TLV2361 . . . DBV PACKAGE
(TOP VIEW)



TLV2362 . . . D, DGK, P, PS, OR PW PACKAGE
(TOP VIEW)



ORDERING INFORMATION

T_A	PACKAGE†		ORDERABLE PART NUMBER	TOP-SIDE MARKING‡
–0°C to 70°C	SOT-23-5 (DBV)	Reel of 3000	TLV2361CDBVR	YC3_
		Reel of 250	TLV2361CDBVT	
–40°C to 85°C	SOT-23-5 (DBV)	Reel of 3000	TLV2361IDBVR	YC4_
		Reel of 250	TLV2361IDBVT	
	MSOP/VSSOP (DGK)	Reel of 2500	TLV2362IDGKR	YBS
	PDIP (P)	Tube of 50	TLV2362IP	TLV2362IP
	SOIC (D)	Tube of 75	TLV2362ID	2362I
		Reel of 2500	TLV2362IDR	
	SOP (PS)	Reel of 2000	TLV2362IPSR	TY2362
	TSSOP (PW)	Tube of 150	TLV2362IPW	TY2362
		Reel of 2000	TLV2362IPWR	

† Package drawings, standard packing quantities, thermal data, symbolization, and PCB design guidelines are available at www.ti.com/sc/package.

‡ DBV: The actual top-side marking has one additional character that designates the wafer fab/assembly site.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

**TEXAS
INSTRUMENTS**


POST OFFICE BOX 655303 • DALLAS, TEXAS 75265
POST OFFICE BOX 1443 • HOUSTON, TEXAS 77251-1443

Copyright © 2007, Texas Instruments Incorporated

TLV2361, TLV2362
HIGH-PERFORMANCE LOW-VOLTAGE OPERATIONAL AMPLIFIERS

SLOS195H – FEBRUARY 1997 – REVISED JUNE 2007

equivalent schematic (each amplifier)

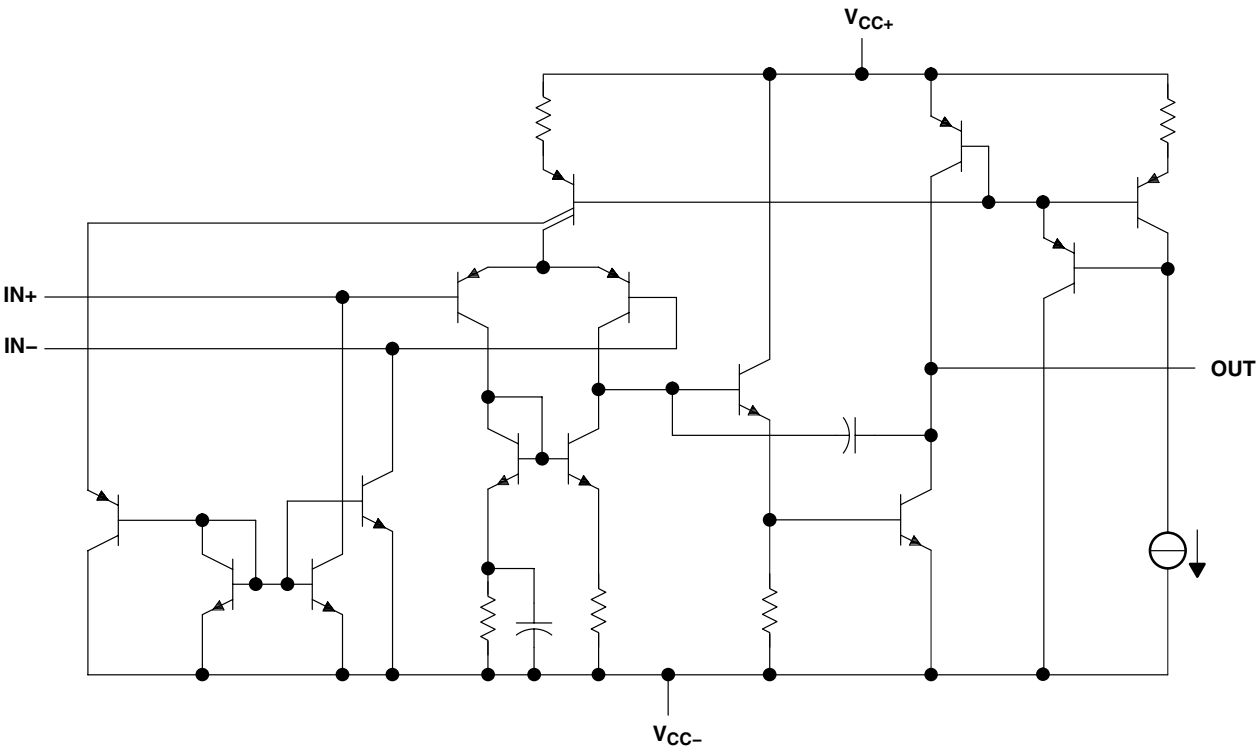

ACTUAL DEVICE COMPONENT COUNT		
COMPONENT	TLV2361	TLV2362
Transistors	30	46
Resistors	6	11
Diodes	1	1
Capacitors	2	4
JFET	1	1

TLV2361, TLV2362

HIGH-PERFORMANCE LOW-VOLTAGE OPERATIONAL AMPLIFIERS

SLOS195H – FEBRUARY 1997 – REVISED JUNE 2007

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)[†]

Supply voltage, V_{CC+} (see Note 1)	3.5 V
Supply voltage, V_{CC-} (see Note 1)	–3.5 V
Differential input voltage, V_{ID} (see Note 2)	± 3.5 V
Input voltage, V_I (any input) (see Notes 1 and 3)	$V_{CC\pm}$
Output voltage, V_O	± 3.5 V
Output current, I_O	20 mA
Duration of short-circuit current at (or below) 25°C (output shorted to GND)	Unlimited
Package thermal impedance, θ_{JA} (see Notes 4 and 5):	
D package	97°C/W
DBV package	206°C/W
DGK package	172°C/W
P package	85°C/W
PS package	95°C/W
PW package	149°C/W
Operating virtual junction temperature, T_J	150°C
Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds	260°C
Storage temperature range, T_{stg}	–65°C to 150°C

[†] Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

- NOTES:
1. All voltage values, except differential voltages, are with respect to the midpoint between V_{CC+} and V_{CC-} .
 2. Differential voltages are at $IN+$ with respect to $IN-$.
 3. All input voltage values must not exceed V_{CC-} .
 4. Maximum power dissipation is a function of $T_J(\max)$, θ_{JA} , and T_A . The maximum allowable power dissipation at any allowable ambient temperature is $P_D = (T_J(\max) - T_A)/\theta_{JA}$. Selecting the maximum of 150°C can affect reliability.
 5. The package thermal impedance is calculated in accordance with JESD 51-7.

recommended operating conditions

			MIN	MAX	UNIT
V _{CC}	Supply voltage		±1	±2.5	V
T _A	Operating free-air temperature	TLV2361C	0	70	°C
		TLV2361I, TLV2362I	−40	85	



TLV2361, TLV2362

HIGH-PERFORMANCE LOW-VOLTAGE OPERATIONAL AMPLIFIERS

SLOS195H – FEBRUARY 1997 – REVISED JUNE 2007

TLV2361 and TLV2362 electrical characteristics, $V_{CC\pm} = \pm 1.5 \text{ V}$ (unless otherwise noted)

PARAMETER		TEST CONDITIONS		T_A	MIN	TYP	MAX	UNIT
V_{IO}	Input offset voltage	$V_O = 0, \quad V_{IC} = 0$		25°C		1	6	mV
				Full range			7.5	
I_{IO}	Input offset current	$V_O = 0, \quad V_{IC} = 0$		25°C		5	100	nA
				Full range			150	
I_{IB}	Input bias current	$V_O = 0, \quad V_{IC} = 0$		25°C		20	150	nA
				Full range			250	
V_{IC}	Common-mode input voltage	$ V_{IO} \leq 7.5 \text{ mV}$		25°C	± 0.5			V
				Full range	± 0.5			
V_{OM+}	Maximum positive-peak output voltage	$R_L = 10 \text{ k}\Omega$		25°C	1.2	1.4		V
		$R_L \geq 10 \text{ k}\Omega$		Full range	1.2			
V_{OM-}	Maximum negative-peak output voltage	$R_L = 10 \text{ k}\Omega$		25°C	-1.2	-1.4		V
		$R_L \geq 10 \text{ k}\Omega$		Full range	-1.2			
I_{CC}	Supply current (per amplifier)	$V_O = 0, \quad \text{No load}$		25°C		1.4	2.25	mA
				Full range			2.75	
A_{VD}	Large-signal differential voltage amplification	$V_O = \pm 1 \text{ V}, \quad R_L = 10 \text{ k}\Omega$	TLV2361	25°C	60	80		dB
			TLV2362			55		
CMRR	Common-mode rejection ratio	$V_{IC} = \pm 0.5 \text{ V}$		25°C		75		dB
k_{SVR}	Supply-voltage rejection ratio	$V_{CC\pm} = \pm 1.5 \text{ V to } \pm 2.5 \text{ V}$		25°C		80		dB

TLV2361 and TLV2362 operating characteristics, $V_{CC\pm} = \pm 1.5 \text{ V}, T_A = 25^\circ\text{C}$

PARAMETER		TEST CONDITIONS			TYP	UNIT
SR	Slew rate	$A_V = 1, \quad V_I = \pm 0.5 \text{ V}$			2.5	V/ μs
B_1	Unity-gain bandwidth	$A_V = 40, \quad R_L = 10 \text{ k}\Omega, \quad C_L = 100 \text{ pF}$			6	MHz
V_n	Equivalent input noise voltage	$R_S = 100 \Omega, \quad R_F = 10 \text{ k}\Omega, \quad f = 1 \text{ kHz}$			9	nV/ $\sqrt{\text{Hz}}$



TLV2361, TLV2362

HIGH-PERFORMANCE LOW-VOLTAGE OPERATIONAL AMPLIFIERS

SLOS195H – FEBRUARY 1997 – REVISED JUNE 2007

TLV2361 and TLV2362 electrical characteristics, $V_{CC\pm} = \pm 2.5\text{ V}$ (unless otherwise noted)

PARAMETER		TEST CONDITIONS		T_A	MIN	TYP	MAX	UNIT
V_{IO}	Input offset voltage	$V_O = 0,$ $V_{IC} = 0$		25°C		1	6	mV
				Full range			7.5	
I_{IO}	Input offset current	$V_O = 0,$ $V_{IC} = 0$		25°C		5	100	nA
				Full range			150	
I_{IB}	Input bias current	$V_O = 0,$ $V_{IC} = 0$		25°C		20	150	nA
				Full range			250	
V_{IC}	Common-mode input voltage	$ V_{IO} \leq 7.5\text{ mV}$		25°C		± 1.5		V
				Full range		± 1.4		
V_{OM+}	Maximum positive-peak output voltage	$R_L = 10\text{ k}\Omega$		25°C		2	2.4	V
		$R_L \geq 10\text{ k}\Omega$		Full range		2		
V_{OM-}	Maximum negative-peak output voltage	$R_L = 10\text{ k}\Omega$		25°C		-2	-2.4	V
		$R_L \geq 10\text{ k}\Omega$		Full range		-2		
I_{CC}	Supply current (per amplifier)	$V_O = 0,$ No load		25°C		1.75	2.5	mA
				Full range			3	
A_{VD}	Large-signal differential voltage amplification	$V_O = \pm 1\text{ V},$ $R_L = 10\text{ k}\Omega$	TLV2361	25°C		60	80	dB
			TLV2362			60		
CMRR	Common-mode rejection ratio	$V_{IC} = \pm 0.5\text{ V}$		25°C		85		dB
k_{SVR}	Supply-voltage rejection ratio	$V_{CC\pm} = \pm 1.5\text{ V to } \pm 2.5\text{ V}$		25°C		80		dB

TLV2361 and TLV2362 operating characteristics, $V_{CC\pm} = \pm 2.5\text{ V}, T_A = 25^\circ\text{C}$

PARAMETER		TEST CONDITIONS		TYP	UNIT
SR	Slew rate	$A_V = 1,$ $V_I = \pm 0.5\text{ V}$		3	V/ μs
B_1	Unity-gain bandwidth	$A_V = 40,$ $R_L = 10\text{ k}\Omega,$ $C_L = 100\text{ pF}$		7	MHz
V_n	Equivalent input noise voltage	$R_S = 100\ \Omega,$ $R_F = 10\text{ k}\Omega,$ $f = 1\text{ kHz}$		8	nV/ $\sqrt{\text{Hz}}$
THD + N	Total harmonic distortion, plus noise	$A_V = 1,$ $V_O = \pm 1.2\text{ V},$ $R_L = 10\text{ k}\Omega, f = 3\text{ kHz}$		0.004	%



TLV2361, TLV2362

HIGH-PERFORMANCE LOW-VOLTAGE OPERATIONAL AMPLIFIERS

SLOS195H – FEBRUARY 1997 – REVISED JUNE 2007

TYPICAL CHARACTERISTICS

Table of Graphs

GRAPH TITLE	FIGURE
Supply current vs Free-air temperature	1
Supply current vs Supply voltage	2
Maximum positive output voltage vs Output current	3
Maximum negative output voltage vs Output current	4
Maximum peak-to-peak output voltage vs Frequency	5
Equivalent input noise voltage vs Frequency	6
Total harmonic distortion vs Frequency	7
Total harmonic distortion vs Output voltage	8







POST OFFICE BOX 655303 • DALLAS, TEXAS 75265
POST OFFICE BOX 1443 • HOUSTON, TEXAS 77251-1443

TLV2361, TLV2362 HIGH-PERFORMANCE LOW-VOLTAGE OPERATIONAL AMPLIFIERS

SLOS195H – FEBRUARY 1997 – REVISED JUNE 2007

TYPICAL CHARACTERISTICS

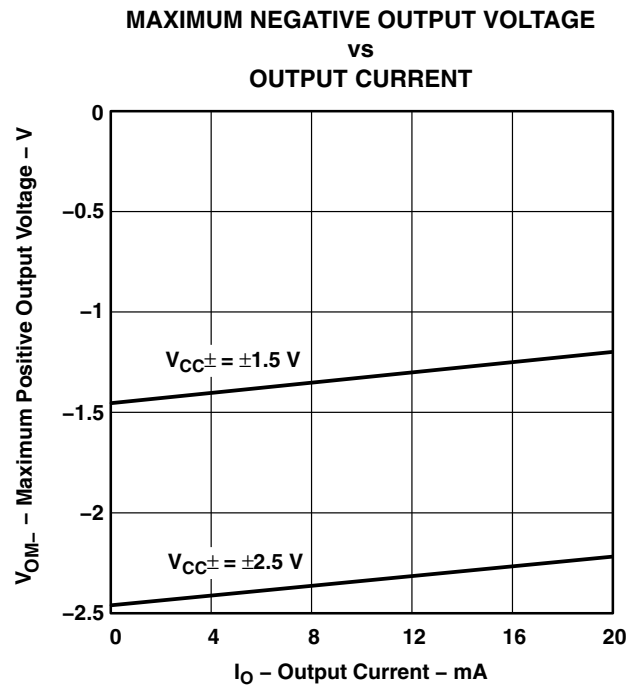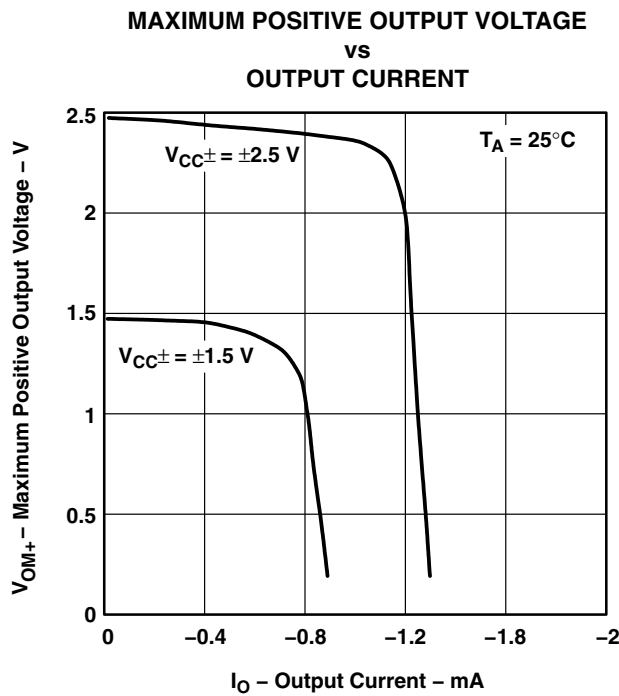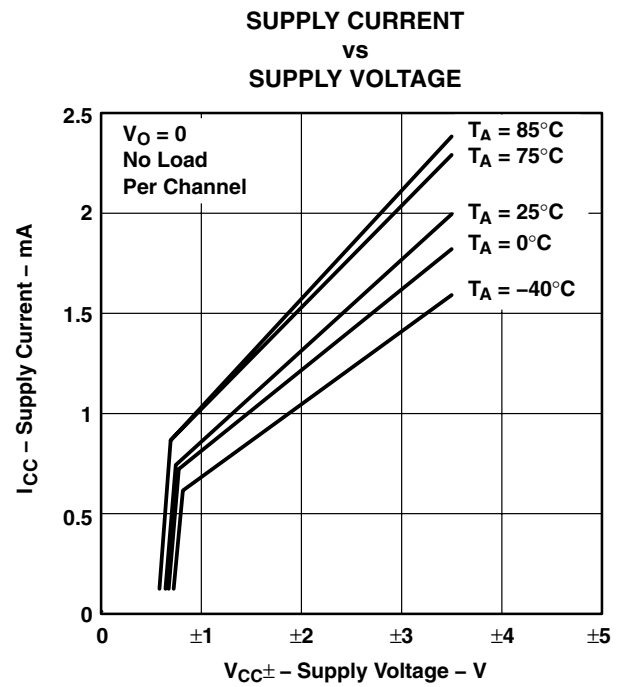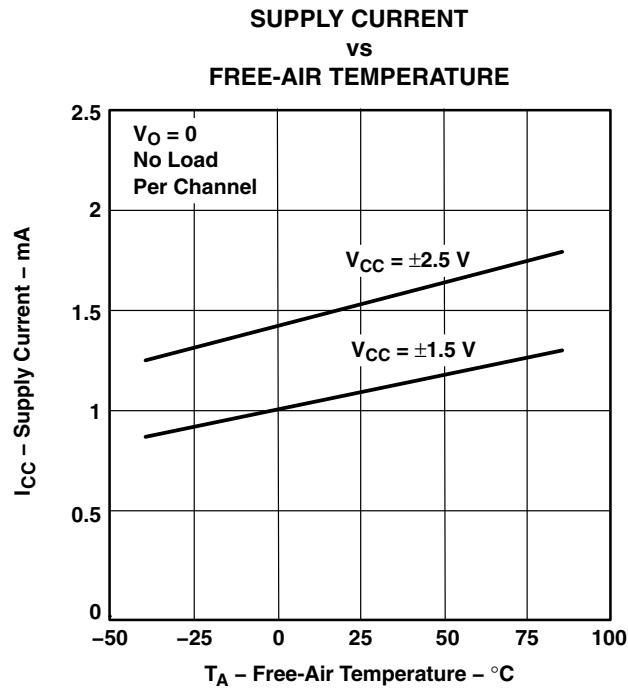

TLV2361, TLV2362

HIGH-PERFORMANCE LOW-VOLTAGE OPERATIONAL AMPLIFIERS

SLOS195H – FEBRUARY 1997 – REVISED JUNE 2007

TYPICAL CHARACTERISTICS

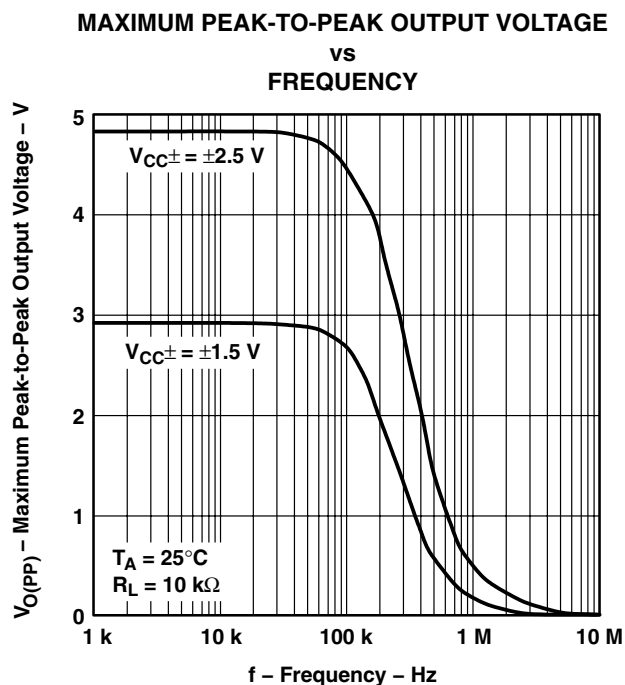


Figure 5

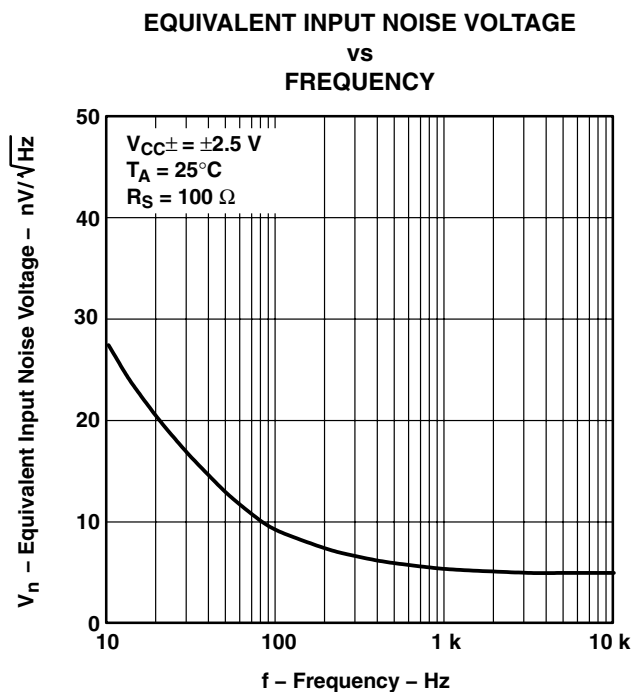


Figure 6

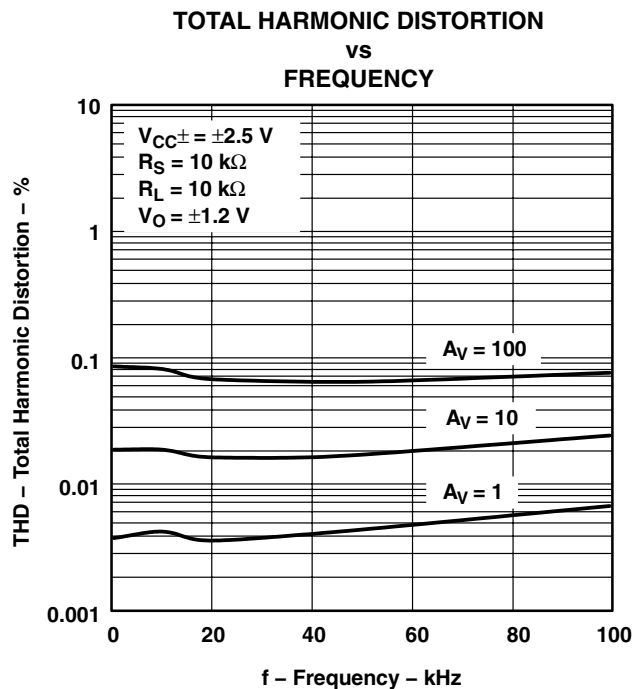


Figure 7

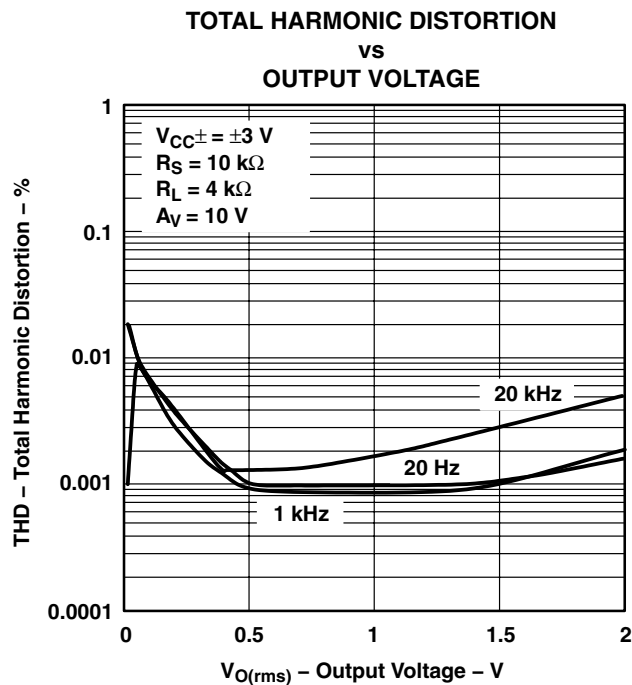


Figure 8

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package Pins	Package qty Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
TLV2361CDBVR	Active	Production	SOT-23 (DBV) 5	3000 LARGE T&R	Yes	NIPDAU SN	Level-1-260C-UNLIM	0 to 70	(YC3B, YC3G, YC3J, YC3L)
TLV2361CDBVR.A	Active	Production	SOT-23 (DBV) 5	3000 LARGE T&R	Yes	SN	Level-1-260C-UNLIM	0 to 70	(YC3B, YC3G, YC3J, YC3L)
TLV2361CDBVT	Active	Production	SOT-23 (DBV) 5	250 SMALL T&R	Yes	NIPDAU SN	Level-1-260C-UNLIM	0 to 70	(YC3B, YC3G, YC3J, YC3L)
TLV2361CDBVT.A	Active	Production	SOT-23 (DBV) 5	250 SMALL T&R	Yes	SN	Level-1-260C-UNLIM	0 to 70	(YC3B, YC3G, YC3J, YC3L)
TLV2361IDBVR	Active	Production	SOT-23 (DBV) 5	3000 LARGE T&R	Yes	NIPDAU SN	Level-1-260C-UNLIM	-40 to 85	(YC4B, YC4G, YC4J, YC4L)
TLV2361IDBVR.A	Active	Production	SOT-23 (DBV) 5	3000 LARGE T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 85	(YC4B, YC4G, YC4J, YC4L)
TLV2361IDBVT	Active	Production	SOT-23 (DBV) 5	250 SMALL T&R	Yes	NIPDAU SN	Level-1-260C-UNLIM	-40 to 85	(YC4B, YC4G, YC4J, YC4L)
TLV2361IDBVT.A	Active	Production	SOT-23 (DBV) 5	250 SMALL T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 85	(YC4B, YC4G, YC4J, YC4L)
TLV2362ID	Active	Production	SOIC (D) 8	75 TUBE	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	2362I
TLV2362ID.A	Active	Production	SOIC (D) 8	75 TUBE	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	2362I
TLV2362IDGKR	Active	Production	VSSOP (DGK) 8	2500 LARGE T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 85	(YBL, YBS, YBU, YY BS)
TLV2362IDGKR.A	Active	Production	VSSOP (DGK) 8	2500 LARGE T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 85	(YBL, YBS, YBU, YY BS)
TLV2362IDR	Active	Production	SOIC (D) 8	2500 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	2362I
TLV2362IDR.A	Active	Production	SOIC (D) 8	2500 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	2362I
TLV2362IP	Active	Production	PDIP (P) 8	50 TUBE	Yes	NIPDAU	N/A for Pkg Type	-40 to 85	TLV2362IP
TLV2362IP.A	Active	Production	PDIP (P) 8	50 TUBE	Yes	NIPDAU	N/A for Pkg Type	-40 to 85	TLV2362IP
TLV2362IPWR	Active	Production	TSSOP (PW) 8	2000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	TY2362
TLV2362IPWR.A	Active	Production	TSSOP (PW) 8	2000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	TY2362

⁽¹⁾ **Status:** For more details on status, see our [product life cycle](#).

⁽²⁾ **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

⁽³⁾ **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

⁽⁴⁾ **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

⁽⁵⁾ **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

⁽⁶⁾ **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.


TAPE AND REEL INFORMATION



*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
TLV2361CDBVR	SOT-23	DBV	5	3000	178.0	9.0	3.3	3.2	1.4	4.0	8.0	Q3
TLV2361CDBVR	SOT-23	DBV	5	3000	180.0	8.4	3.2	3.2	1.4	4.0	8.0	Q3
TLV2361CDBVT	SOT-23	DBV	5	250	178.0	9.0	3.3	3.2	1.4	4.0	8.0	Q3
TLV2361IDBVR	SOT-23	DBV	5	3000	180.0	8.4	3.2	3.2	1.4	4.0	8.0	Q3
TLV2361IDBVR	SOT-23	DBV	5	3000	178.0	9.0	3.3	3.2	1.4	4.0	8.0	Q3
TLV2361IDBVT	SOT-23	DBV	5	250	178.0	9.0	3.3	3.2	1.4	4.0	8.0	Q3
TLV2362IDGKR	VSSOP	DGK	8	2500	330.0	12.4	5.25	3.35	1.25	8.0	12.0	Q1
TLV2362IDR	SOIC	D	8	2500	330.0	12.4	6.4	5.2	2.1	8.0	12.0	Q1
TLV2362IPWR	TSSOP	PW	8	2000	330.0	12.4	7.0	3.6	1.6	8.0	12.0	Q1


TAPE AND REEL BOX DIMENSIONS

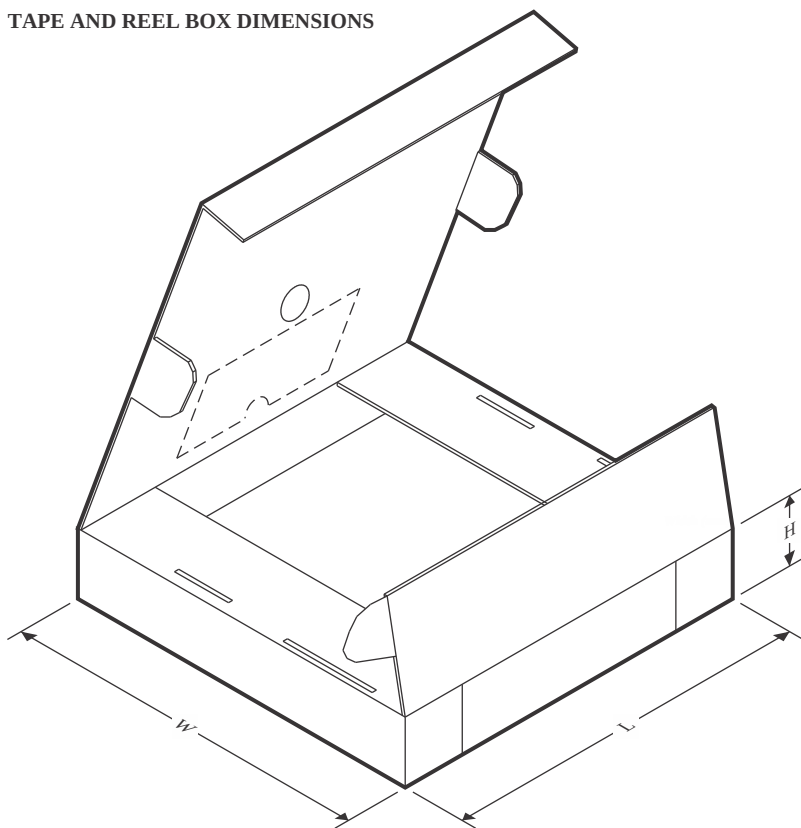

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
TLV2361CDBVR	SOT-23	DBV	5	3000	180.0	180.0	18.0
TLV2361CDBVR	SOT-23	DBV	5	3000	203.0	203.0	35.0
TLV2361CDBVT	SOT-23	DBV	5	250	180.0	180.0	18.0
TLV2361IDBVR	SOT-23	DBV	5	3000	203.0	203.0	35.0
TLV2361IDBVR	SOT-23	DBV	5	3000	180.0	180.0	18.0
TLV2361IDBVT	SOT-23	DBV	5	250	180.0	180.0	18.0
TLV2362IDGKR	VSSOP	DGK	8	2500	366.0	364.0	50.0
TLV2362IDR	SOIC	D	8	2500	340.5	338.1	20.6
TLV2362IPWR	TSSOP	PW	8	2000	353.0	353.0	32.0

TUBE

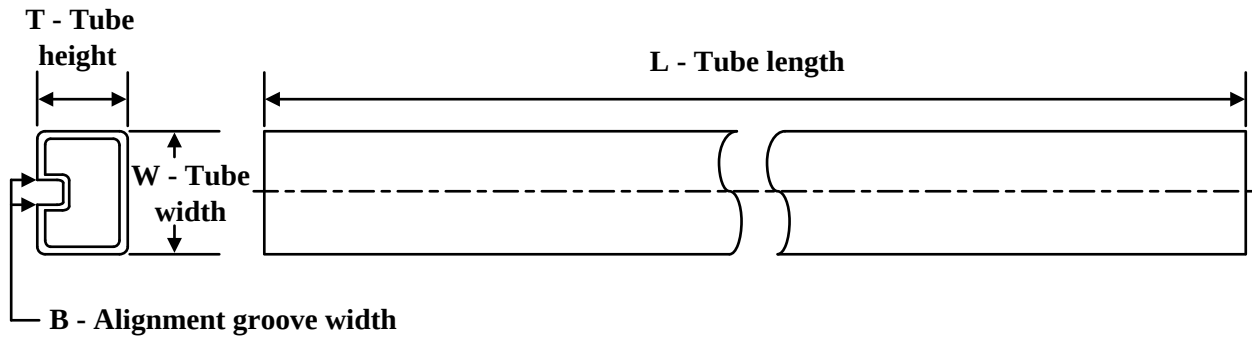

*All dimensions are nominal


Device	Package Name	Package Type	Pins	SPQ	L (mm)	W (mm)	T (μm)	B (mm)
TLV2362ID	D	SOIC	8	75	507	8	3940	4.32
TLV2362ID.A	D	SOIC	8	75	507	8	3940	4.32
TLV2362IP	P	PDIP	8	50	506	13.97	11230	4.32
TLV2362IP.A	P	PDIP	8	50	506	13.97	11230	4.32

EXAMPLE BOARD LAYOUT


DBV0005A

SOT-23 - 1.45 mm max height

SMALL OUTLINE TRANSISTOR

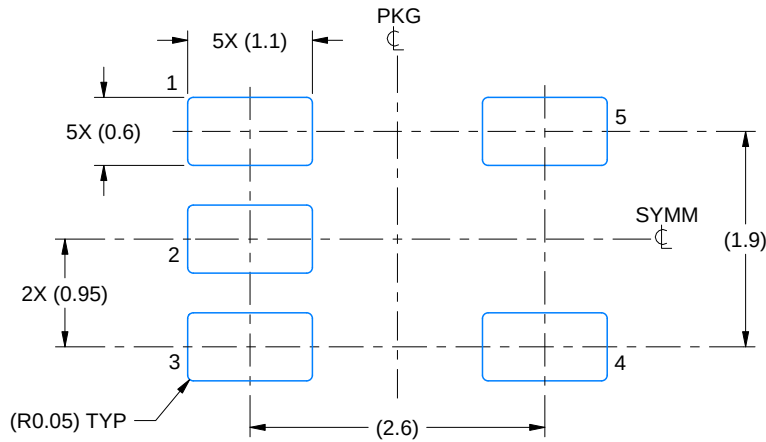

LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE:15X

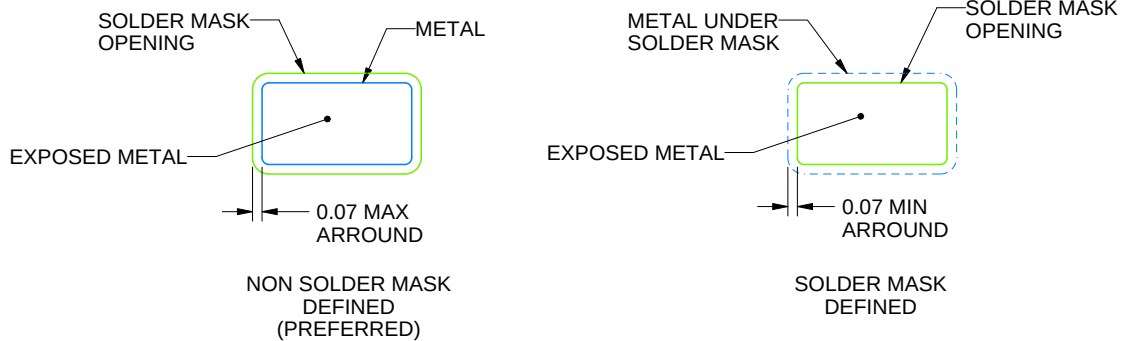

SOLDER MASK DETAILS

4214839/K 08/2024

NOTES: (continued)


6. Publication IPC-7351 may have alternate designs.
7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

EXAMPLE STENCIL DESIGN

DBV0005A

SOT-23 - 1.45 mm max height

SMALL OUTLINE TRANSISTOR

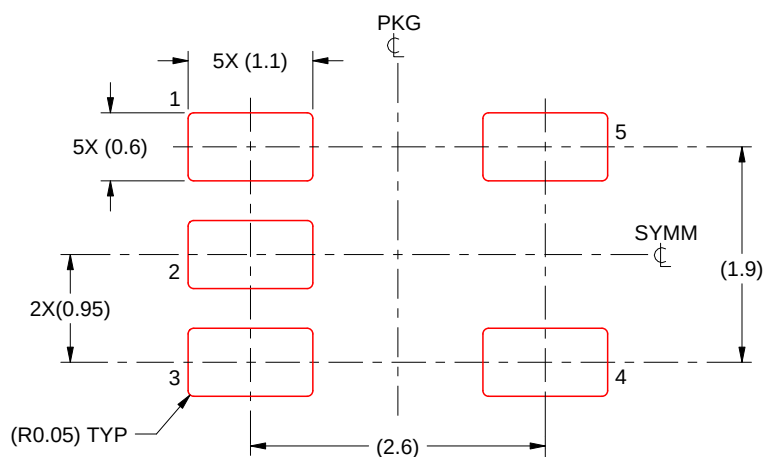

SOLDER PASTE EXAMPLE
BASED ON 0.125 mm THICK STENCIL
SCALE:15X

4214839/K 08/2024

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.



VSSOP - 1.1 mm max height

Technical drawing of a connector assembly, showing top, side, and detail views with dimensions and callouts.

Top View:

- Overall width: 5.05 TYP, 4.75
- Overall height: 3.1, 2.9, NOTE 3
- Pin 1 Index Area (circled)
- Pin 1: 1
- Pin 2: 2
- Pin 3: 3
- Pin 4: 4
- Pin 5: 5
- Pin 6: 6X 0.65
- Pin 7: 7X 1.95
- Pin 8: 8X 0.38, 0.25
- Pin 9: 9X 0.13
- Pin 10: 10X 0.13
- Pin 11: 11X 0.13
- Pin 12: 12X 0.13
- Pin 13: 13X 0.13
- Pin 14: 14X 0.13
- Pin 15: 15X 0.13
- Pin 16: 16X 0.13
- Pin 17: 17X 0.13
- Pin 18: 18X 0.13
- Pin 19: 19X 0.13
- Pin 20: 20X 0.13
- Pin 21: 21X 0.13
- Pin 22: 22X 0.13
- Pin 23: 23X 0.13
- Pin 24: 24X 0.13
- Pin 25: 25X 0.13
- Pin 26: 26X 0.13
- Pin 27: 27X 0.13
- Pin 28: 28X 0.13
- Pin 29: 29X 0.13
- Pin 30: 30X 0.13
- Pin 31: 31X 0.13
- Pin 32: 32X 0.13
- Pin 33: 33X 0.13
- Pin 34: 34X 0.13
- Pin 35: 35X 0.13
- Pin 36: 36X 0.13
- Pin 37: 37X 0.13
- Pin 38: 38X 0.13
- Pin 39: 39X 0.13
- Pin 40: 40X 0.13
- Pin 41: 41X 0.13
- Pin 42: 42X 0.13
- Pin 43: 43X 0.13
- Pin 44: 44X 0.13
- Pin 45: 45X 0.13
- Pin 46: 46X 0.13
- Pin 47: 47X 0.13
- Pin 48: 48X 0.13
- Pin 49: 49X 0.13
- Pin 50: 50X 0.13
- Pin 51: 51X 0.13
- Pin 52: 52X 0.13
- Pin 53: 53X 0.13
- Pin 54: 54X 0.13
- Pin 55: 55X 0.13
- Pin 56: 56X 0.13
- Pin 57: 57X 0.13
- Pin 58: 58X 0.13
- Pin 59: 59X 0.13
- Pin 60: 60X 0.13
- Pin 61: 61X 0.13
- Pin 62: 62X 0.13
- Pin 63: 63X 0.13
- Pin 64: 64X 0.13
- Pin 65: 65X 0.13
- Pin 66: 66X 0.13
- Pin 67: 67X 0.13
- Pin 68: 68X 0.13
- Pin 69: 69X 0.13
- Pin 70: 70X 0.13
- Pin 71: 71X 0.13
- Pin 72: 72X 0.13
- Pin 73: 73X 0.13
- Pin 74: 74X 0.13
- Pin 75: 75X 0.13
- Pin 76: 76X 0.13
- Pin 77: 77X 0.13
- Pin 78: 78X 0.13
- Pin 79: 79X 0.13
- Pin 80: 80X 0.13
- Pin 81: 81X 0.13
- Pin 82: 82X 0.13
- Pin 83: 83X 0.13
- Pin 84: 84X 0.13
- Pin 85: 85X 0.13
- Pin 86: 86X 0.13
- Pin 87: 87X 0.13
- Pin 88: 88X 0.13
- Pin 89: 89X 0.13
- Pin 90: 90X 0.13
- Pin 91: 91X 0.13
- Pin 92: 92X 0.13
- Pin 93: 93X 0.13
- Pin 94: 94X 0.13
- Pin 95: 95X 0.13
- Pin 96: 96X 0.13
- Pin 97: 97X 0.13
- Pin 98: 98X 0.13
- Pin 99: 99X 0.13
- Pin 100: 100X 0.13
- Pin 101: 101X 0.13
- Pin 102: 102X 0.13
- Pin 103: 103X 0.13
- Pin 104: 104X 0.13
- Pin 105: 105X 0.13
- Pin 106: 106X 0.13
- Pin 107: 107X 0.13
- Pin 108: 108X 0.13
- Pin 109: 109X 0.13
- Pin 110: 110X 0.13
- Pin 111: 111X 0.13
- Pin 112: 112X 0.13
- Pin 113: 113X 0.13
- Pin 114: 114X 0.13
- Pin 115: 115X 0.13
- Pin 116: 116X 0.13
- Pin 117: 117X 0.13
- Pin 118: 118X 0.13
- Pin 119: 119X 0.13
- Pin 120: 120X 0.13
- Pin 121: 121X 0.13
- Pin 122: 122X 0.13
- Pin 123: 123X 0.13
- Pin 124: 124X 0.13
- Pin 125: 125X 0.13
- Pin 126: 126X 0.13
- Pin 127: 127X 0.13
- Pin 128: 128X 0.13
- Pin 129: 129X 0.13
- Pin 130: 130X 0.13
- Pin 131: 131X 0.13
- Pin 132: 132X 0.13
- Pin 133: 133X 0.13
- Pin 134: 134X 0.13
- Pin 135: 135X 0.13
- Pin 136: 136X 0.13
- Pin 137: 137X 0.13
- Pin 138: 138X 0.13
- Pin 139: 139X 0.13
- Pin 140: 140X 0.13
- Pin 141: 141X 0.13
- Pin 142: 142X 0.13
- Pin 143: 143X 0.13
- Pin 144: 144X 0.13
- Pin 145: 145X 0.13
- Pin 146: 146X 0.13
- Pin 147: 147X 0.13
- Pin 148: 148X 0.13
- Pin 149: 149X 0.13
- Pin 150: 150X 0.13
- Pin 151: 151X 0.13
- Pin 152: 152X 0.13
- Pin 153: 153X 0.13
- Pin 154: 154X 0.13
- Pin 155: 155X 0.13
- Pin 156: 156X 0.13
- Pin 157: 157X 0.13
- Pin 158: 158X 0.13
- Pin 159: 159X 0.13
- Pin 160: 160X 0.13
- Pin 161: 161X 0.13
- Pin 162: 162X 0.13
- Pin 163: 163X 0.13
- Pin 164: 164X 0.13
- Pin 165: 165X 0.13
- Pin 166: 166X 0.13
- Pin 167: 167X 0.13
- Pin 168: 168X 0.13
- Pin 169: 169X 0.13
- Pin 170: 170X 0.13
- Pin 171: 171X 0.13
- Pin 172: 172X 0.13
- Pin 173: 173X 0.13
- Pin 174: 174X 0.13
- Pin 175: 175X 0.13
- Pin 176: 176X 0.13
- Pin 177: 177X 0.13
- Pin 178: 178X 0.13
- Pin 179: 179X 0.13
- Pin 180: 180X 0.13
- Pin 181: 181X 0.13
- Pin 182: 182X 0.13
- Pin 183: 183X 0.13
- Pin 184: 184X 0.13
- Pin 185: 185X 0.13
- Pin 186: 186X 0.13
- Pin 187: 187X 0.13
- Pin 188: 188X 0.13
- Pin 189: 189X 0.13
- Pin 190: 190X 0.13
- Pin 191: 191X 0.13
- Pin 192: 1

PowerPAD is a trademark of Texas Instruments.



- 
- TEXAS
INSTRUMENTS**
www.ti.com

EXAMPLE BOARD LAYOUT

DGK0008A

™ VSSOP - 1.1 mm max height

SMALL OUTLINE PACKAGE

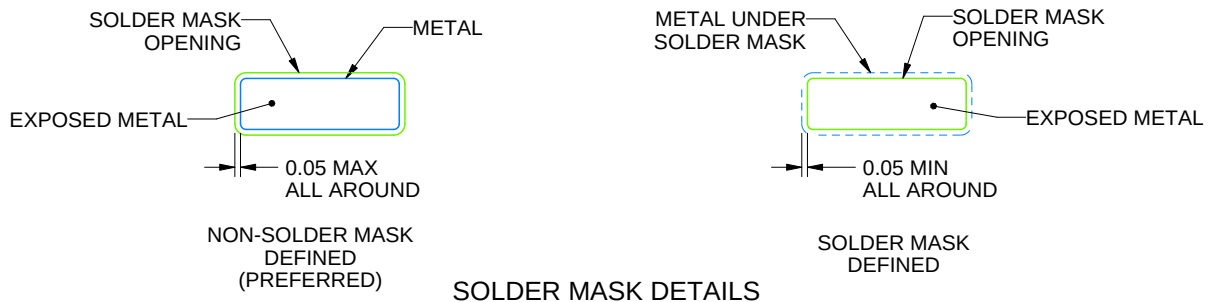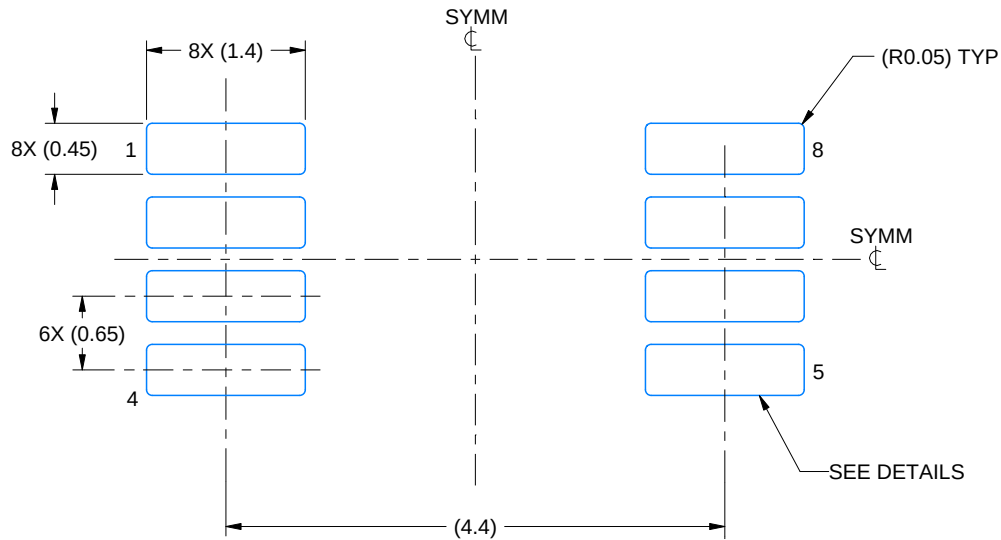

4214862/A 04/2023

NOTES: (continued)


6. Publication IPC-7351 may have alternate designs.
7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.
8. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.
9. Size of metal pad may vary due to creepage requirement.

EXAMPLE STENCIL DESIGN

DGK0008A

™ VSSOP - 1.1 mm max height

SMALL OUTLINE PACKAGE

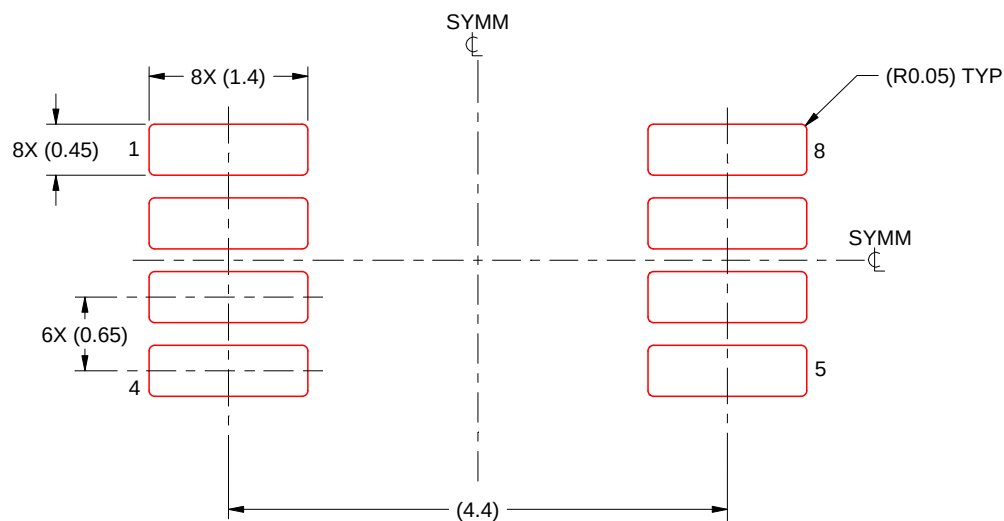

SOLDER PASTE EXAMPLE
SCALE: 15X


4214862/A 04/2023

NOTES: (continued)

11. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
12. Board assembly site may have different recommendations for stencil design.

P (R-PDIP-T8)

PLASTIC DUAL-IN-LINE PACKAGE

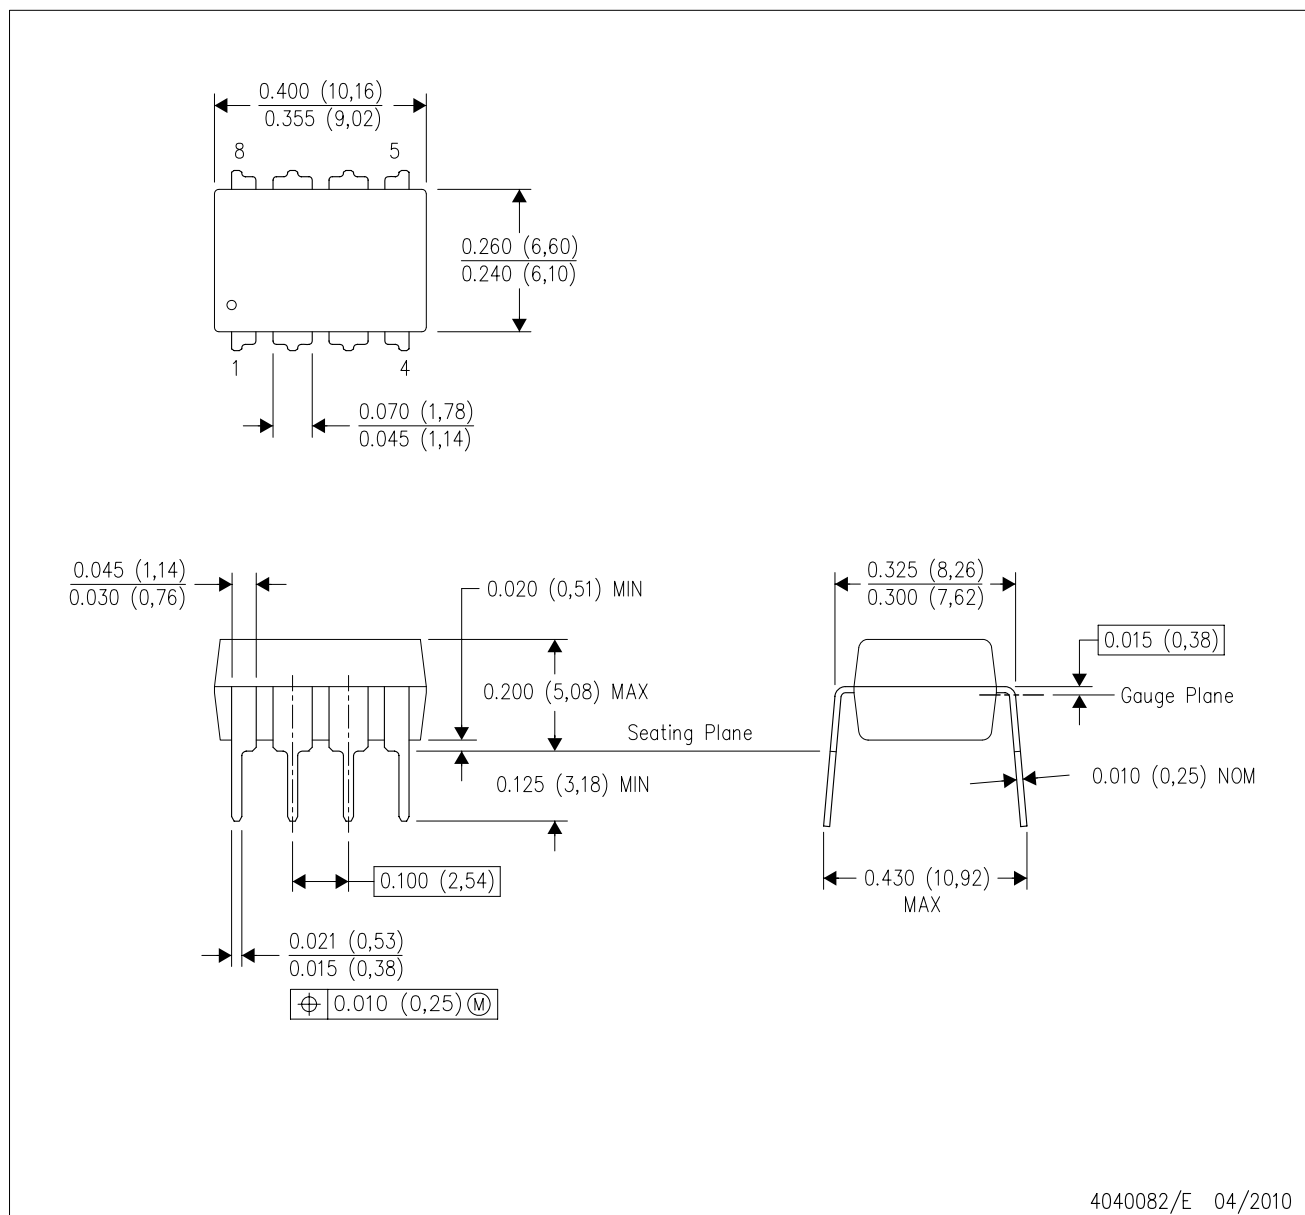




- NOTES:
- A. All linear dimensions are in inches (millimeters).
 - B. This drawing is subject to change without notice.
 - C. Falls within JEDEC MS-001 variation BA.



PACKAGE OUTLINE

TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE

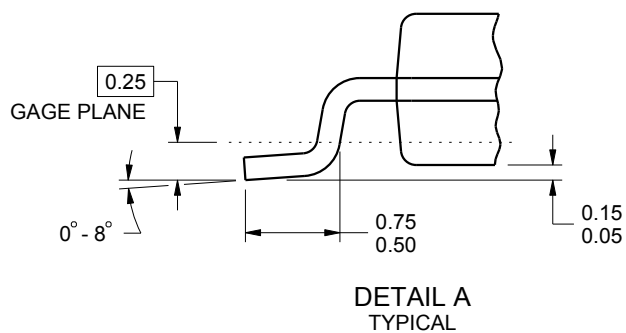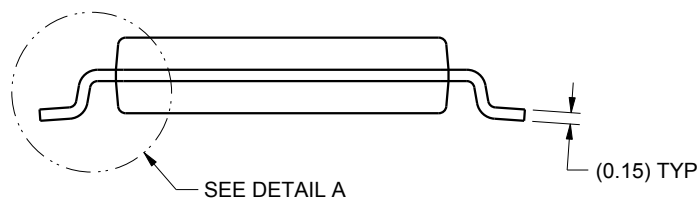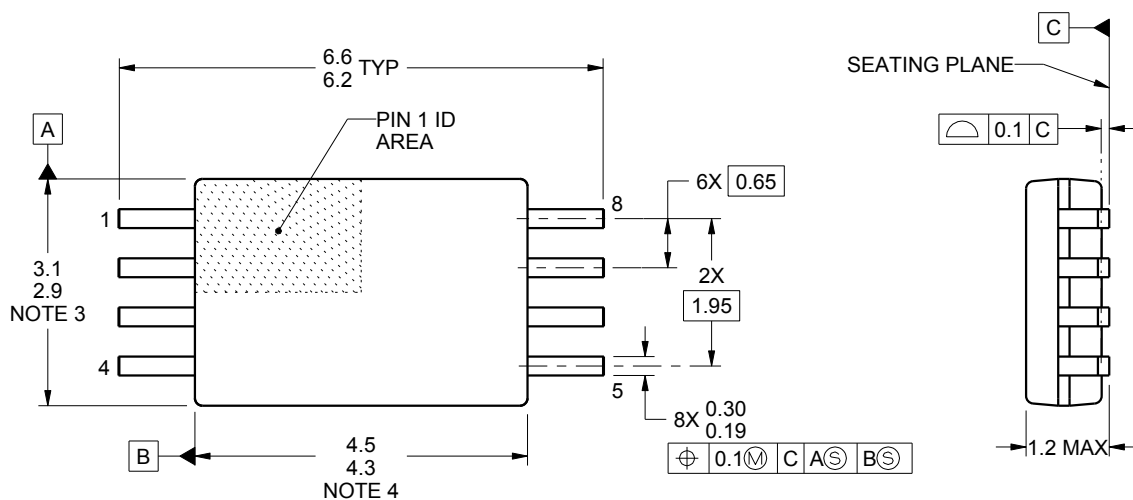

4221848/A 02/2015

NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
5. Reference JEDEC registration MO-153, variation AA.

EXAMPLE BOARD LAYOUT



PW0008A

TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE

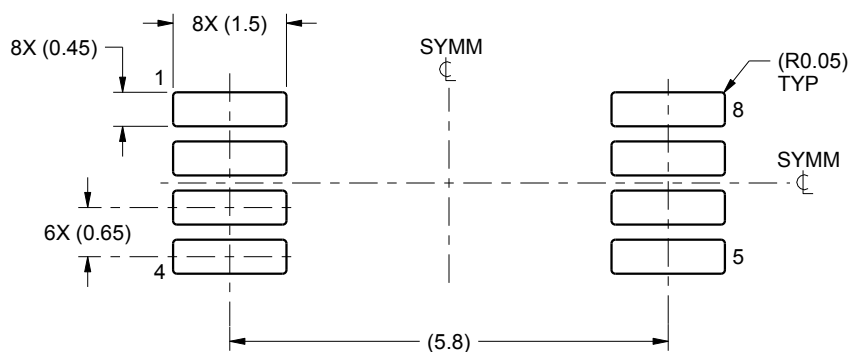

LAND PATTERN EXAMPLE
SCALE:10X

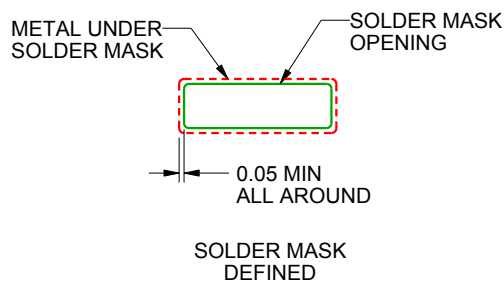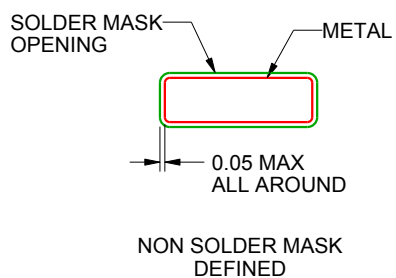

SOLDER MASK DETAILS
NOT TO SCALE

4221848/A 02/2015

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.


7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

EXAMPLE STENCIL DESIGN

PW0008A

TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE

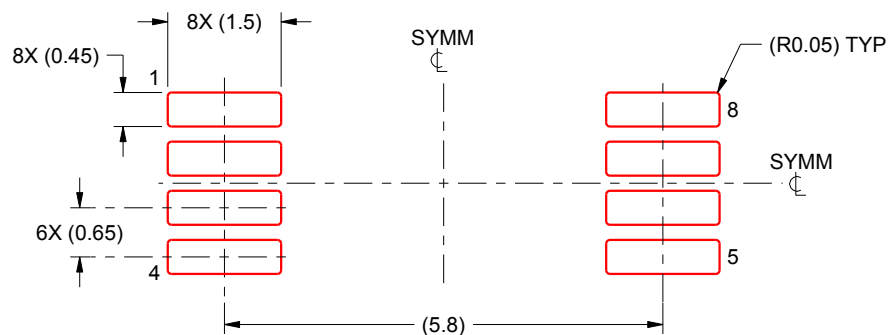


SOLDER PASTE EXAMPLE
BASED ON 0.125 mm THICK STENCIL
SCALE:10X

4221848/A 02/2015

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.




D0008A

PACKAGE OUTLINE

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT

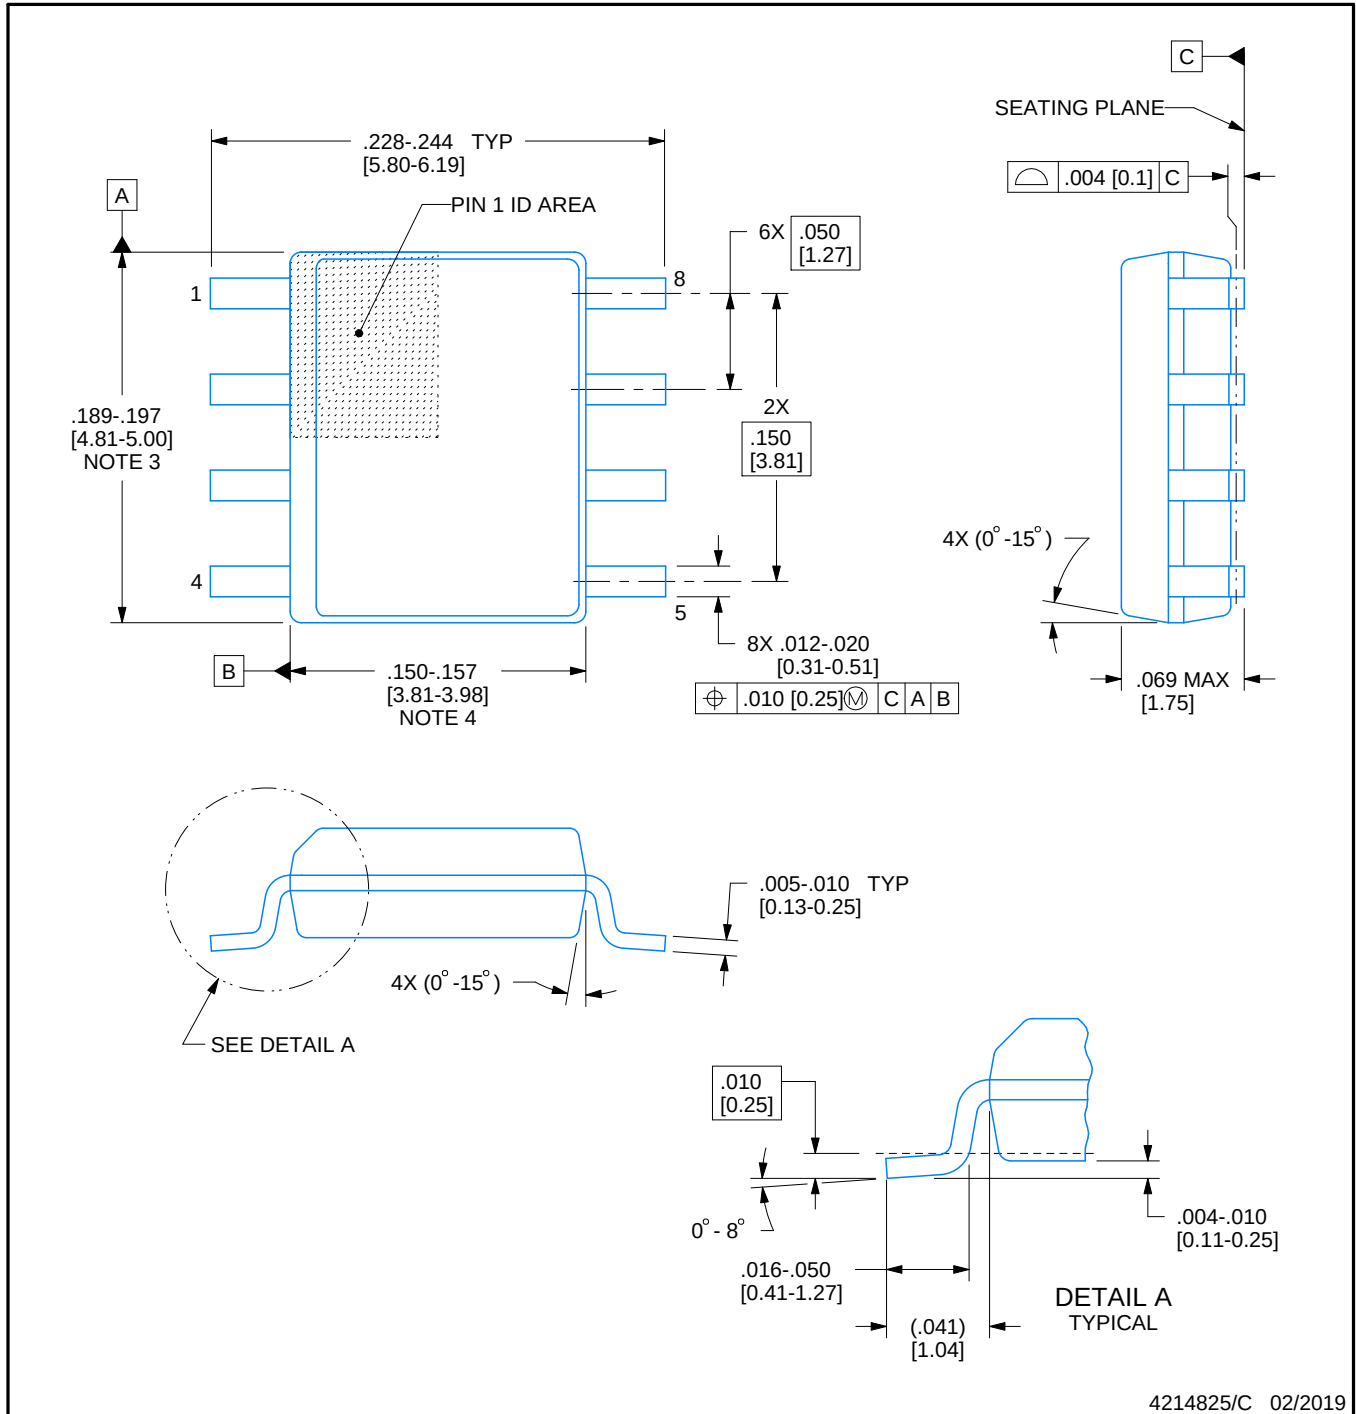

NOTES:



1. Linear dimensions are in inches [millimeters]. Dimensions in parenthesis are for reference only. Controlling dimensions are in inches. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed .006 [0.15] per side.
4. This dimension does not include interlead flash.
5. Reference JEDEC registration MS-012, variation AA.

EXAMPLE BOARD LAYOUT

D0008A

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT

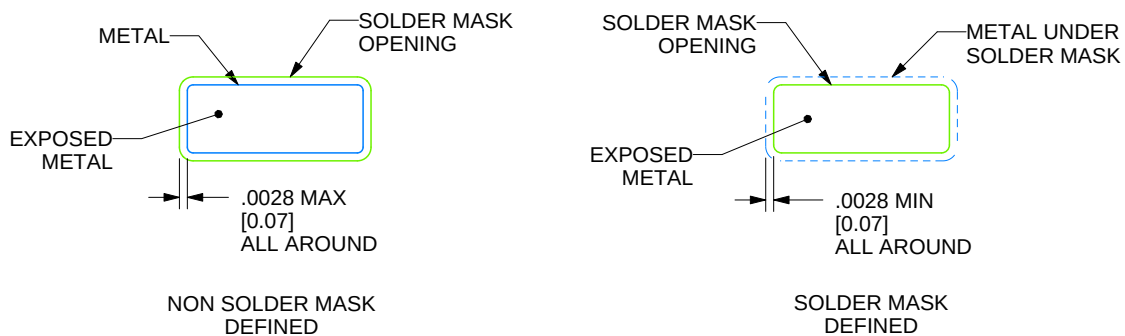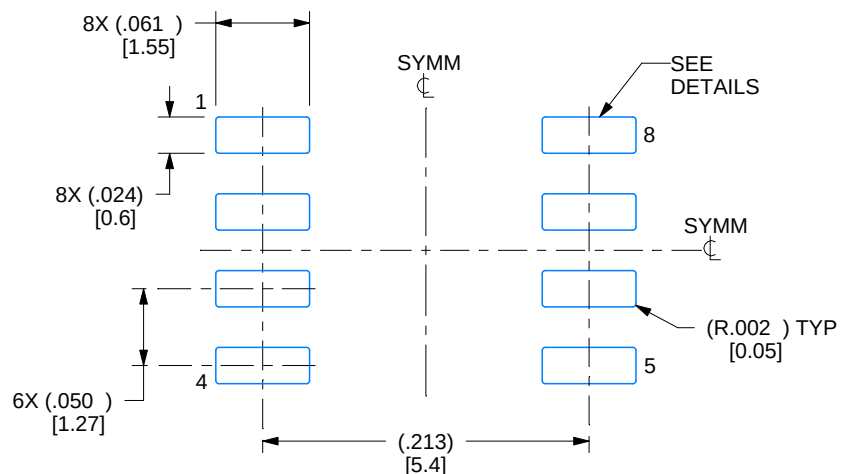

SOLDER MASK DETAILS

4214825/C 02/2019

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.


7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

EXAMPLE STENCIL DESIGN

D0008A

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT

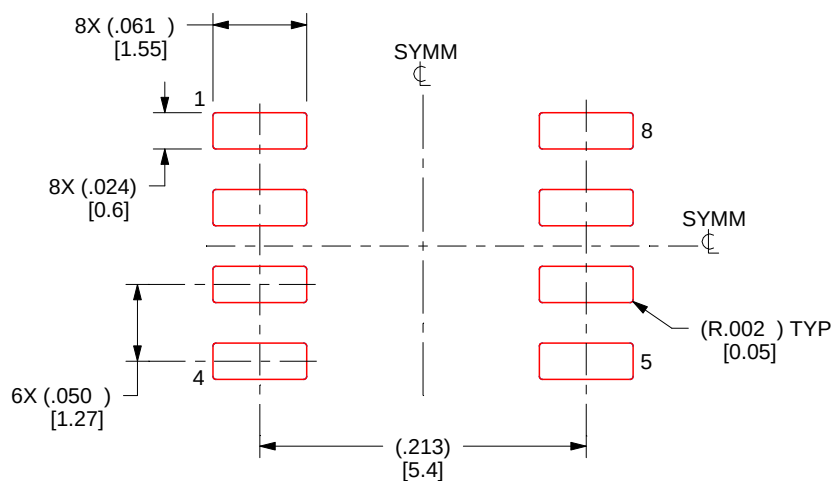

SOLDER PASTE EXAMPLE
BASED ON .005 INCH [0.125 MM] THICK STENCIL
SCALE:8X

4214825/C 02/2019

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#), [TI's General Quality Guidelines](#), or other applicable terms available either on [ti.com](#) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025