






P.C.B. Layout



Schematic

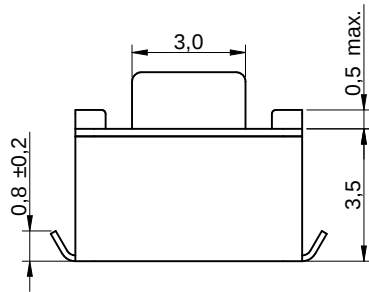

Scale - 5:1

TECHNICAL CHARACTERISTICS

SPECIFICATION

>Rating:	50mA, 12VDC
>Contact Resistance:	
Initial:	100mOHM max.
After Life Test:	1OHM max.
>Insulation Resistance:	min. 100MOHM at 500VDC
>Dielectric Strength:	250VAC for 1 minute
>Stroke:	0.25 +/- 0.1 mm
>Bounce:	10ms max.

MATERIAL

>Cover:	Stainless Steel
>Stem:	LCP UL 94V-0
>Frame:	LCP UL 94V-0
>Contact:	Stainless Steel with silver
>Terminal:	brass with silver plating

SOLDERING INFORMATION

>Terminal in SMD version
>Reflow soldering according to JEDEC J-STD 020 Hot Air
>Hand soldering under 350°C for 3 sec. max

ENVIRONMENTAL

>Storage condition:	-40°C ~ +85°C
>Operation condition:	-40°C ~ +85°C
>Compliance:	Lead Free, ROHS, Reach

PACKAGING INFORMATION


>Tape & Reel

PN	Force	Color of Stem	Life cycle	Height	
				H	
434 123 xxx 816	160g ± 50gf	Black	50.000	-043	-050
434 113 xxx 826	260g ± 70gf	White	30.000	-043	-050
434 123 xxx 836	360g ± 90gf	Salmon	50.000	-043	-050

This electronic component is designed and developed with the intention for use in general electronics equipments.

Before incorporating the components into any equipments in the field such as aerospace, aviation, nuclear control, submarine, transportation, (automotive control, train control, ship control), transportation signal, disaster prevention, medical, public information network etc. where higher safety and reliability are especially required or if there is possibility of direct damage or injury to human body, Wurth Elektronik must be asked for a written approval.

In addition, even electronic component in general electronic equipments, when used in electrical circuits that require high safety, reliability functions or performance, the sufficient reliability evaluation-check for the safety must be performed before by the user before usage.

				GENERAL TOLERANCE .x = +/- 0,2 .xx = +/- 0,15			Basic material				
					Date	Name	DESCRIPTION WS-TASV 6,0x3,5mm Tact Switch_J-Bend SMD version				
				Drawn	10-07-08	Jelisarow					
				Checked	10-07-08	Hsu					
d	remove Contact cladding	14-11-04	DaF								
c	revised MatchCode	14-07-24	AL		Würth Elektronik eiCan		Scale 5:1		Position		SIZE
b	Bounce 10ms max.	14-04-11	DaF				Drawing.- No. 4341x3xxx8x6				A4
a	warning text	11-10-28	WJ								
REV	FILE	DATE	BY	EDV NO	4341x3xxx8x6.dft		System :Solid Edge V20				



Wurth Elektronik
eiCan