

15-80 Watts

AEL Series



- Energy Efficiency Level V
- CEC 2008 and EISA 2007 Compliant
- Limited Power Source Approval
- China Compulsory Certification (CCC) Qualified
- +60 °C Operating Temperature
- Compact Dimensions
- 3 Year Warranty

Specification

Input

Input Voltage	• 90-264 VAC
Input Frequency	• 47-63 Hz
Input Current	• AEL15/20: 0.4 A max at 115 VAC AEL40: 1.0 A max at 115 VAC AEL60: 1.6 A max at 115 VAC AEL80: 1.1 A max at 115 VAC
Inrush Current	• AEL15/20: 15/30 A max for 115/230 VAC, AEL40: 25/50 A max for 115/230 VAC, AEL60: 35/70 A max for 115/230 VAC, AEL80: 45/92 A max for 115/230 VAC, cold start at 25 °C
Earth Leakage Current	• 0.75 mA at 240 VAC
Power Factor	• EN61000-3-2, Class A
Input Protection	• Internal fuse in line, AEL15/20: T1 A, 250 V AEL40: T2 A, 250 V AEL60/80: T3.15 A, 250 V
No Load Input Power	• 0.5 W maximum, model dependent

Output

Output Voltage	• See tables
Minimum Load	• No minimum load required
Hold Up Time	• AEL15: 5 ms min, AEL20/40: 12 ms min, AEL60/80: 16 ms min, at full load 110 VAC
Start Up Delay	• AEL20/40: 0.5 s, AEL15/60/80: 2.0 s max at full load 100 VAC
Transient Response	• 2% max deviation, recovery to within 1% of nominal in 500 μ s for 50% load change
Line Regulation	• See tables
Load Regulation	• See tables
Ripple & Noise	• 1% pk-pk, 20 MHz bandwidth
Overvoltage Protection	• 112-132% (AEL40/60/80 only)
Overload Protection	• 110-150% (AEL20/40/60/80 only)
Short Circuit Protection	• Trip & restart (hiccup mode), auto recovery
Temperature Coefficient	• $\pm 0.04\%/^{\circ}\text{C}$

General

Efficiency	• See tables
Energy Efficiency	• Model dependent, see tables
Isolation	• 3000 VAC Input to Output 1500 VAC Input to Ground* 500 VDC Output to Ground* *Not C8 version All class I models available with output negative connected to ground. See notes.
Switching Frequency	• 63 kHz typical
MTBF	• >100 kHrs to MIL-HDBK-217F at 25 °C, GB

Environmental

Operating Temperature	• -20 °C to +60 °C, derate linearly from 100% power at +40 °C to 50% power at +60 °C
Storage Temperature	• -40 °C to +85 °C
Cooling	• Convection cooled
Operating Humidity	• 5-95% RH, non-condensing
Operating Altitude	• 2000 m
Shock	• 10 g, 10 ms on 3 axes

EMC & Safety

Emissions	• EN55022 level B conducted & radiated
Harmonic Current	• EN61000-3-2 class A
Voltage Flicker	• EN61000-3-3
ESD Immunity	• EN61000-4-2 Level 2 (contact) Perf Criteria A EN61000-4-2 Level 3 (air) Perf Criteria A
Radiated Immunity	• EN61000-4-3, 3 V/m, Perf criteria A
EFT/Burst	• EN61000-4-4, level 2, Perf criteria A
Surge	• EN61000-4-5, installation class 3, Perf criteria A
Conducted Immunity	• EN61000-4-6, level 2, Perf criteria A
Magnetic Field	• EN61000-4-8, 1 A/m, Perf criteria A
Dips & Interruptions	• EN61000-4-11, 30% 10 ms, 60% 100 ms, 100% 5000 ms Perf Criteria A, B, B
Safety Approvals	• EN60950-1: UL/cUL60950-1, Approved as Limited Power Source (AEL15-60 only), China Compulsory Certification (CCC) qualified.

Models and Ratings




AEL15 **XP**

Output Power	Output Voltage ⁽³⁾	Output Current	Total Regulation ⁽²⁾	Efficiency ⁽⁵⁾	Model Number ^(1,6)
8 W	3.3 VDC	2.50 A	7%	68%	AEL15US03 ⁽⁴⁾
12 W	5.0 VDC	2.40 A	7%	78%	AEL15US05
15 W	8.0 VDC	1.87 A	5%	79%	AEL15US08
	9.0 VDC	1.66 A	5%	79%	AEL15US09
	12.0 VDC	1.25 A	5%	80%	AEL15US12
	15.0 VDC	1.00 A	5%	81%	AEL15US15
	18.0 VDC	0.83 A	5%	82%	AEL15US18
	24.0 VDC	0.62 A	5%	78%	AEL15US24 ⁽⁴⁾
	30.0 VDC	0.50 A	5%	77%	AEL15US30 ⁽⁴⁾
	36.0 VDC	0.42 A	3%	75%	AEL15US36 ⁽⁴⁾
	48.0 VDC	0.31 A	3%	81%	AEL15US48


Notes

1. Standard input connector is IEC320-C14 Inlet. For optional IEC320-C6 Inlet, add suffix "C6" to model number e.g. AEL15US12C6.
2. Total regulation includes line regulation and load regulation.
3. Other output voltages available, contact sales for details.
4. Energy Efficiency Level IV.
5. Minimum average of efficiencies measured at 25%, 50%, 75% & 100% load.
6. For output negative connected to ground add suffix G.


Mechanical Details

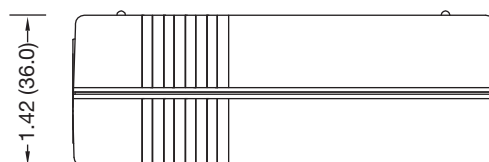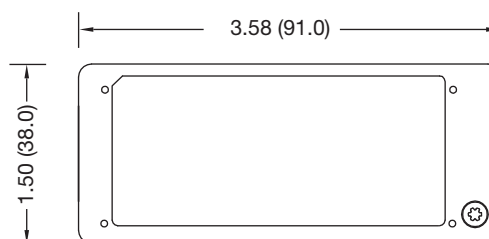

AC INPUT
IEC-320-C6 INLET



AC INPUT
IEC-320-C14 INLET

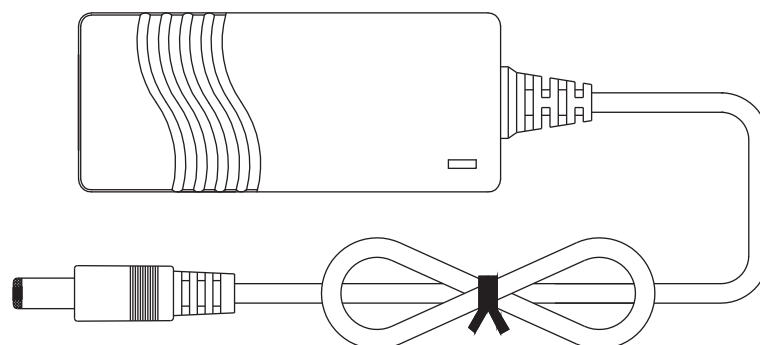

Notes

1. All dimensions are shown in inches (mm). Tolerance ± 0.04 (± 1.0) max.
2. Output connector: is 0.22 (5.5) outer diameter barrel, 0.10 (2.5) inner diameter barrel with centre positive (+) and outer shell negative (-). Length is 0.433 (11.0).
3. Output cable length is 48" (1220mm) approx.
4. Weight: 0.36 lbs (165 g)
5. For European mains lead order part: EU-MAINS-IEC or EU-MAINS-5 for C6 version.
6. For UK mains lead order part: UK-MAINS-IEC or UK-MAINS-5 for C6 version.
7. For US mains lead order part: US-MAINS-IEC or US-MAINS-5 for C6 version.
8. Mains lead length is 78" (2000 mm) approx

Models and Ratings


AEL20XP

Output Power	Output Voltage ⁽³⁾	Output Current	Total Regulation ⁽²⁾	Efficiency ⁽⁴⁾	Model Number ^(1,5)
15 W	5 VDC	3.00 A	5%	79%	AEL20US05
20 W	12 VDC	1.67 A	4%	86%	AEL20US12
	15 VDC	1.33 A	4%	85%	AEL20US15
	24 VDC	0.83 A	3%	87%	AEL20US24
	30 VDC	0.67 A	3%	86%	AEL20US30
	48 VDC	0.42 A	3%	87%	AEL20US48

Notes

1. For optional class II version on AEL20 models only, add suffix 'C2' to model number e.g. AEL20US12C2.
2. Total regulation includes line regulation and load regulation.
3. Other output voltages available, contact sales for details.
4. Minimum average of efficiencies measured at 25%, 50%, 75% & 100% load.
5. For output negative connected to ground add suffix -G.

Mechanical Details

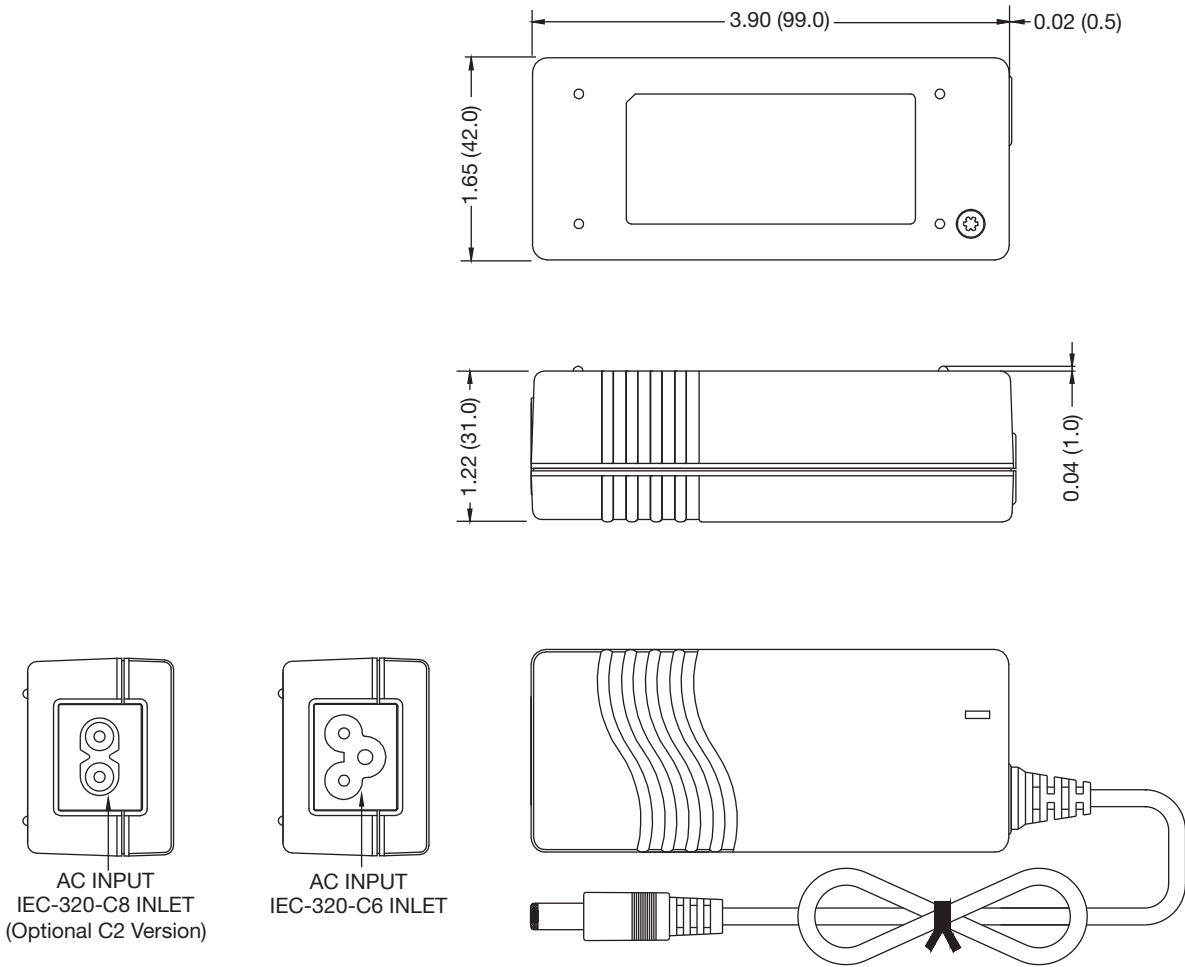

Notes

1. All dimensions are shown in inches (mm). Tolerance ± 0.04 (± 1.0) max.
2. Output connector: 0.22 (5.5) outer diameter barrel, 0.10 (2.5) inner diameter barrel with centre positive (+) and outer shell negative (-). Length is 0.433 (11.0).
3. Output cable length is 48" (1220mm) approx.
4. Weight: 0.37 lbs (170 g)
5. For European mains lead order part: EU-MAINS-C5 for AEL20, EU-MAINS-8 for AEL20 Class II.
6. For UK mains lead order part: UK-MAINS-5 for AEL20, UK-MAINS-8 for AEL20 Class II.
7. For US mains lead order part: US-MAINS-5 for AEL20, US-MAINS-8 for AEL20 Class II.
8. Mains lead length is 78" (2000 mm) approx

Models and Ratings


AEL40 XP

Output Power	Output Voltage ⁽²⁾	Output Current	Total Regulation ⁽¹⁾	Efficiency ⁽⁴⁾	Model Number ⁽⁵⁾
25 W	5 VDC	5.00 A	7%	79%	AEL40US05 ⁽³⁾
35 W	8 VDC	4.37 A	5%	82%	AEL40US08 ⁽³⁾
	9 VDC	3.88 A	5%	83%	AEL40US09 ⁽³⁾
40 W	12 VDC	3.33 A	5%	87%	AEL40US12
	15 VDC	2.67 A	5%	87%	AEL40US15
	18 VDC	2.22 A	5%	86%	AEL40US18
	24 VDC	1.67 A	3%	86%	AEL40US24
	36 VDC	1.11 A	3%	89%	AEL40US36
	48 VDC	0.83 A	3%	91%	AEL40US48

Notes

1. Total regulation includes line regulation and load regulation.
2. Other output voltages available, contact sales for details.
3. Energy Efficiency Level IV
4. Minimum average of efficiencies measured at 25%, 50%, 75% & 100% load.
5. For output negative connected to ground add suffix -G.

Mechanical Details

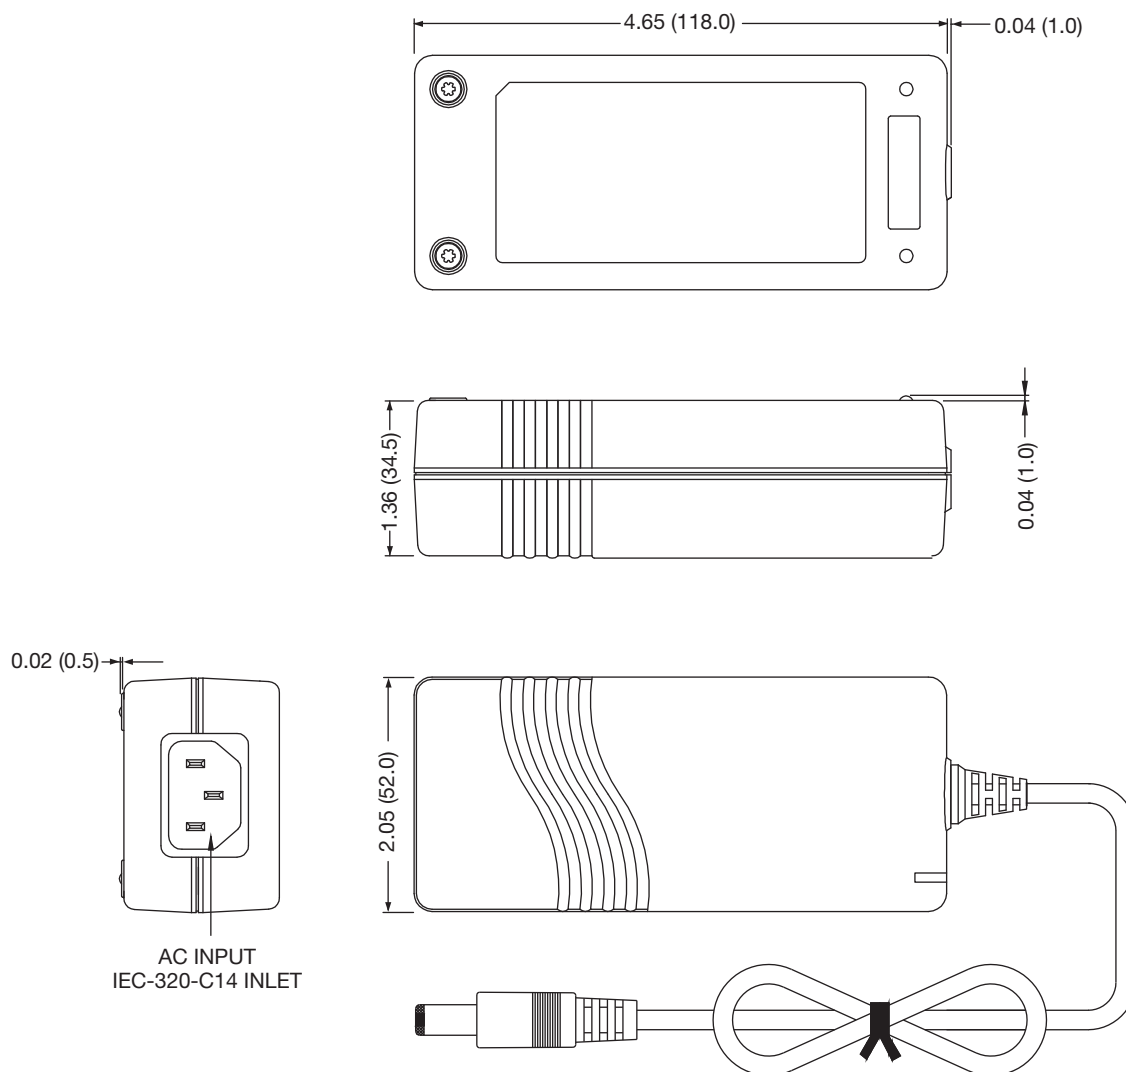

Notes

1. All dimensions are shown in inches (mm). Tolerance ± 0.04 (± 1.0) max.
2. Output connector: 0.22 (5.5) outer diameter barrel, 0.10 (2.5) inner diameter barrel with centre positive (+) and outer shell negative (-). Length is 0.433 (11.0).
3. Output cable length is 48" (1220mm) approx.
4. Weight: 0.64 lbs (275 g).
5. For European mains lead order part: EU-MAINS-IEC.
6. For UK mains lead order part: UK-MAINS-IEC.
7. For US mains lead order part: US-MAINS-IEC.
8. Mains lead length is 78" (2000 mm) approx

Models and Ratings


AEL60XP

Max Output Power	Output Voltage ⁽²⁾	Output Current	Total Regulation ⁽¹⁾	Efficiency ⁽³⁾	Model Number ⁽⁴⁾
57 W	12 VDC	4.75 A	5%	87%	AEL60US12
63 W	15 VDC	4.20 A	5%	88%	AEL60US15
	18 VDC	3.50 A	5%	88%	AEL60US18
	24 VDC	2.63 A	5%	88%	AEL60US24
	30 VDC	2.15 A	5%	90%	AEL60US30
	36 VDC	1.75 A	3%	90%	AEL60US36
	48 VDC	1.31 A	3%	90%	AEL60US48

- Notes
1. Total regulation includes line regulation and load regulation.
2. Other output voltages available, contact sales for details.

3. Minimum average of efficiencies measured at 25%, 50%, 75% & 100% load.
4. For output negative connected to ground add suffix -G.

Mechanical Details

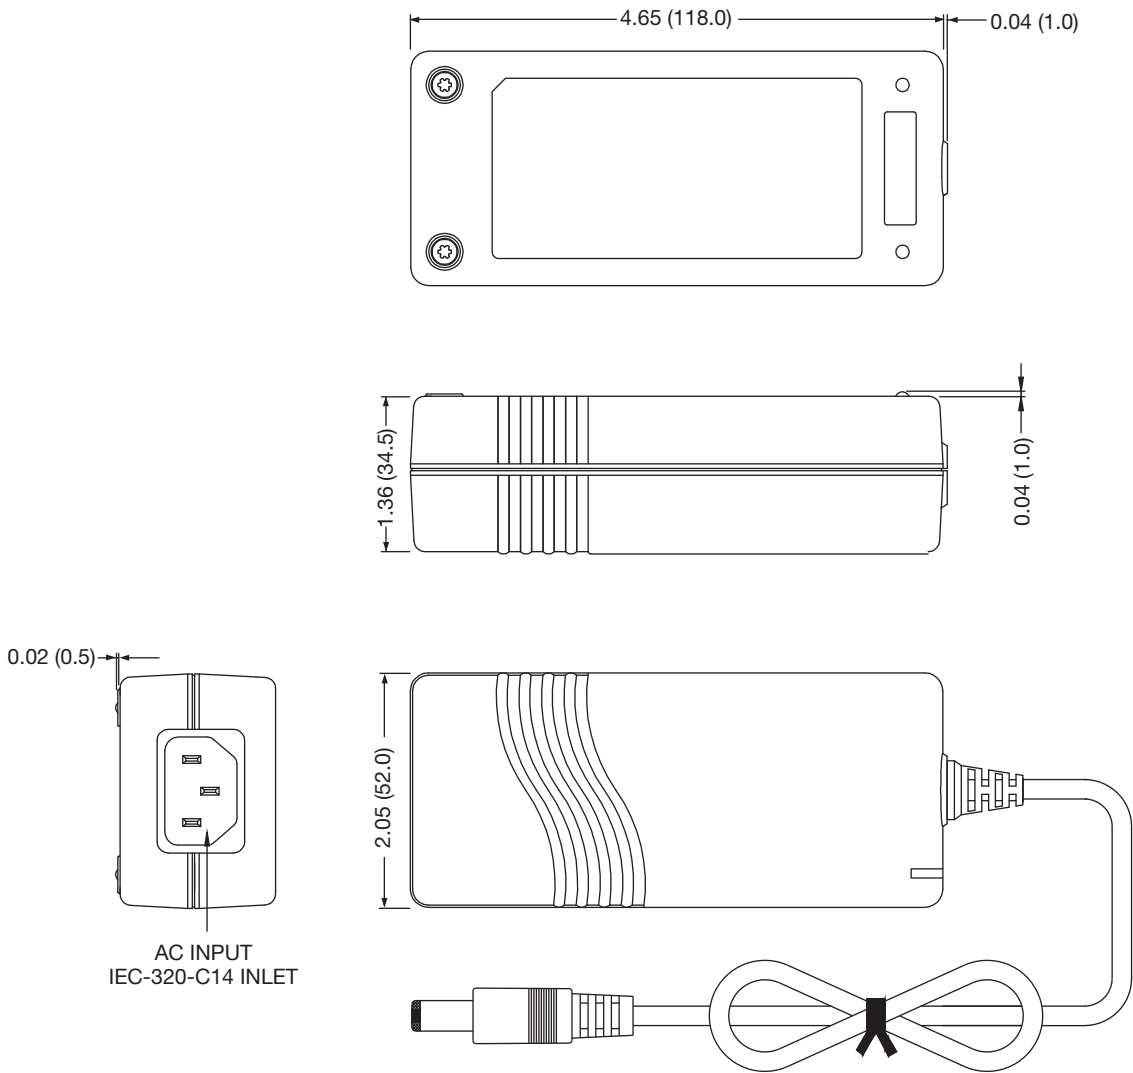

- Notes
1. All dimensions are shown in inches (mm). Tolerance ± 0.04 (± 1.0) max.
2. Output connector: 0.22 (5.5) outer diameter barrel, 0.10 (2.5) inner diameter barrel with centre positive (+) and outer shell negative (-). Length is 0.433 (11.0).
3. Output cable length is 48" (1220mm) approx.
4. Weight: 0.79 lbs (340 g).
5. For European mains lead order part: EU-MAINS-IEC.
6. For UK mains lead order part: UK-MAINS-IEC.
7. For US mains lead order part: US-MAINS-IEC.
8. Mains lead length is 78" (2000 mm) approx

Models and Ratings

AEL80 **XP**

Max Output Power	Output Voltage ⁽²⁾	Output Current	Total Regulation ⁽¹⁾	Efficiency ⁽⁴⁾	Model Number ⁽⁵⁾
80 W	12 VDC	6.66 A	5%	85%	AEL80US12 ⁽⁶⁾
	15 VDC	5.38 A	5%	87%	AEL80US15 ⁽⁶⁾
	18 VDC	4.44 A	5%	88%	AEL80US18
	24 VDC	3.33 A	5%	87%	AEL80US24
	30 VDC	2.66 A	5%	87%	AEL80US30
	36 VDC	2.22 A	5%	88%	AEL80US36
	48 VDC	1.66 A	5%	88%	AEL80US48


Notes

1. Total regulation includes line regulation and load regulation.
 2. Other output voltages available, contact sales for details.
 3. Energy Efficiency Level IV.

4. Minimum average of efficiencies measured at 25%, 50%, 75% & 100% load.
 5. For output negative connected to ground add suffix -G.

Mechanical Details

Pin Connections	
Pin	Function
1	RTN
2	RTN
3	+VE
4	RTN
5	+VE
SHELL	GND

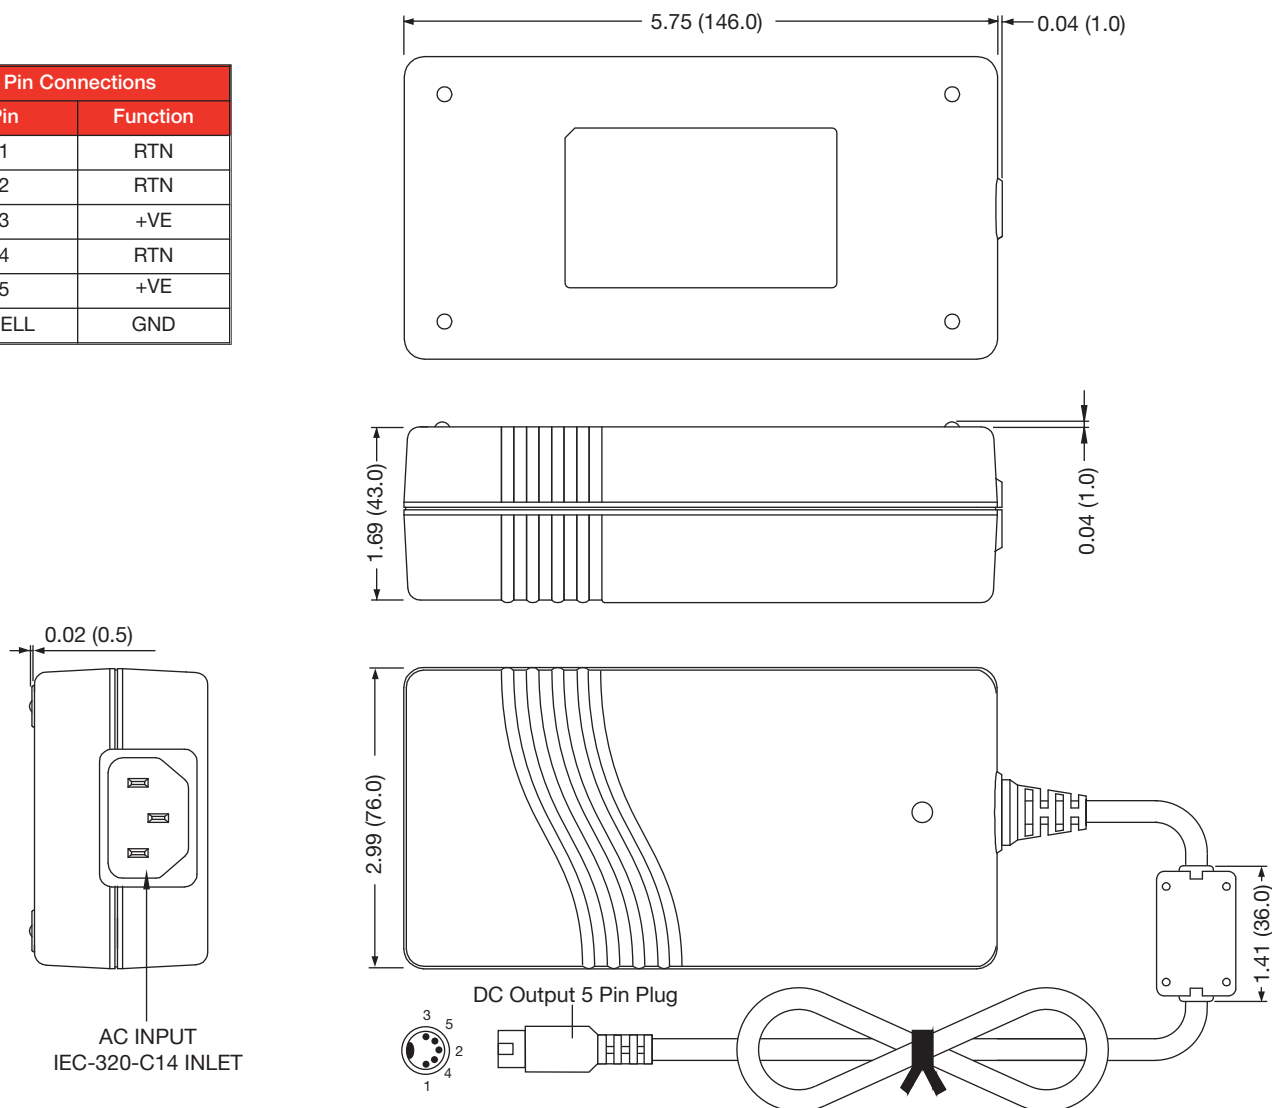

Notes

1. All dimensions are shown in inches (mm). Tolerance ± 0.04 (± 1.0) max.
 2. Output connector: 5 pin 180° DIN
 3. Output cable length: 48" (1220mm) approx.
 4. Weight: 1.5 lbs (700 g)
 5. For European mains lead order part: EU-MAINS-IEC.
 6. For UK mains lead order part: UK-MAINS-IEC.
 7. For US mains lead order part: US-MAINS-IEC.
 8. Mains lead length is 78" (2000 mm) approx