

ULTRA MINIATURE CERAMIC GLASS SEALED SMD CRYSTAL

ABM8G

Pb in glass exemption 7 (c)-I per
RoHS II 2011/65/EU Annex

RoHS
Compliant



3.2 x 2.5 x 1.0 mm

FEATURES:

- Low in height; suitable for thin equipment.
- Glass sealed package assures high reliability and high temperature operation
- Tight tolerance and stability available.
- IR reflow capable
- Low cost version of ABM8 crystal

APPLICATIONS:

- High density applications.
- Modems, communication and test equipment.
- PCMCIA, Wireless applications

STANDARD SPECIFICATIONS:

PARAMETERS

ABRACON P/N	ABM8G Series
Frequency Range	12.000MHz - 50.000MHz
Operation Mode	Fundamental
Operating Temperature	-10°C to +60°C (see options)
Storage Temperature	-55°C to +125°C
Frequency Tolerance at +25°C	± 50ppm max. (see options)
Frequency Stability over the Operating Temp. (Ref. to +25°C)	± 50ppm max. (see options)
Equivalent Series Resistance	See table 1
Shunt Capacitance C0	5.0pF max
Load Capacitance CL	10pF (see options)
Drive Level	100μW max., 10μW Typical
Aging (first year) at 25°C ± 3°C	±3ppm max.
Insulation Resistance	500 M Ω min. at 100 Vdc ±15V

TABLE 1- Standard ESR

Frequency (MHz)	ESR(Ω) max
12.000	120
12.001 - 20.000	80
20.001 - 28.00	60
28.001 - 50.00	50

OPTIONS & PART IDENTIFICATION:

(Left blank if standard)

ABM8G - MHz - - R - - - -

Frequency in MHz
e.g. 24.576MHz
14.31818MHz
26.000MHz

Load Capacitance
Please specify CL in pF or S for Series (Minimum 7pF)
Please contact ABRACON for values under 10pF

ESR
Specify a value in Ω

Operating Temp.
E: 0°C ~ +70°C
B: -20°C ~ +70°C
C: -30°C ~ +70°C
N: -30°C ~ +85°C
D: -40°C ~ +85°C

Freq. Tolerance
1: ± 10 ppm
7: ± 15 ppm
2: ± 20 ppm
3: ± 25 ppm
4: ± 30 ppm

Packaging
Blank: Bulk
T: Tape & Reel (1kpcs)
T3: Tape & Reel (3kpcs)

Freq. Stability
U: ± 10 ppm (*)
G: ± 15 ppm (**)
X: ± 20 ppm
W: ± 25 ppm
Y: ± 30 ppm
H: ± 35 ppm
Q: ± 100 ppm

(*) -10°C to +60°C only. Contact ABRACON for tighter freq. stability.

(**) -10°C to +60°C option E,B,C,N only

ABRACON IS
ISO 9001 : 2008
CERTIFIED



ABRACON
CORPORATION

Visit www.abracon.com for Terms & Conditions of Sale

30332 Esperanza, Rancho Santa Margarita, California 92688

tel 949-546-8000 | fax 949-546-8001 | www.abracon.com

Revised: 05.06.14

ULTRA MINIATURE CERAMIC GLASS SEALED SMD CRYSTAL

ABM8G



Pb in glass exemption 7 (c)-I per
RoHS II 2011/65/EU Annex

RoHS
Compliant



3.2 x 2.5 x 1.0 mm

➤ OUTLINE DRAWING:

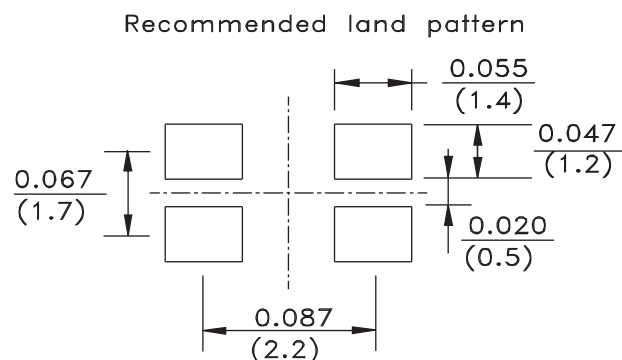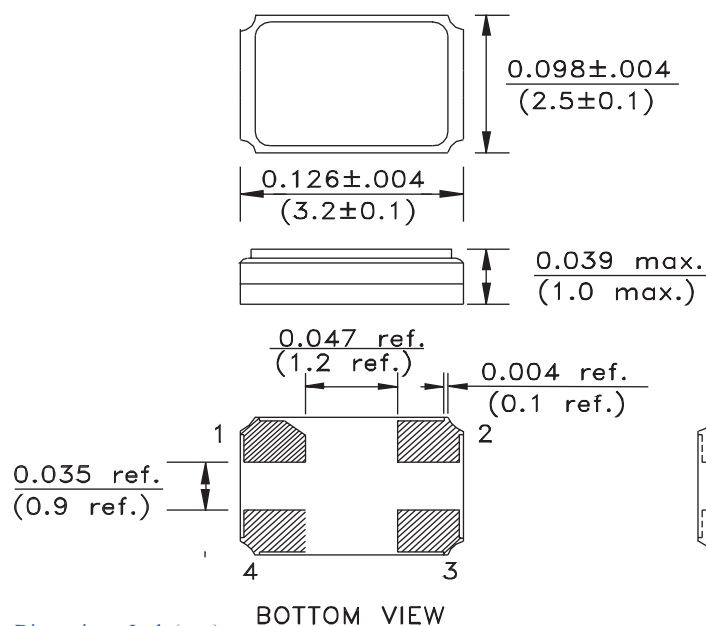


Note: Due to the availability of raw materials, this part may be manufactured with the chamfer on pin 4. Be advised that this does not affect the electrical characteristics of the crystal in any way.

Per the Top Marking from left to right, Pin 1 is always located on the bottom left.


➤ TAPE & REEL:

Tape and reel (1,000pcs/reel)
Tape and reel (3,000pcs/reel)

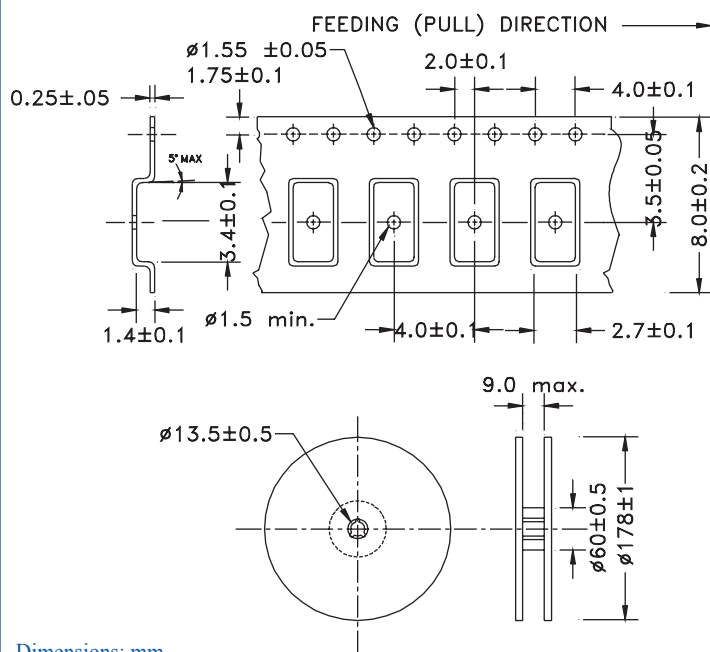

Dimensions: mm

➤ REFLOW PROFILE:

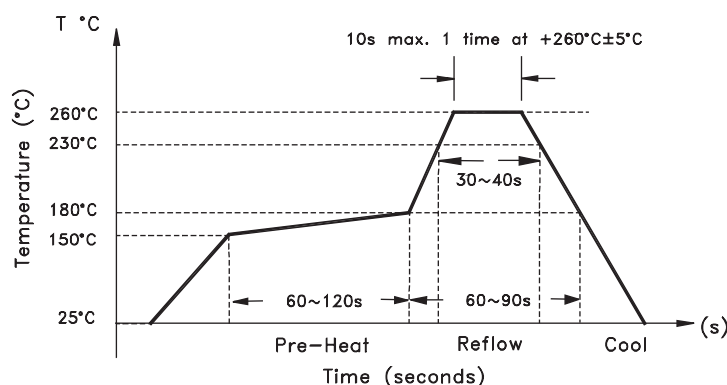

Need a test socket for the ABM8G Series? To view compatible **PRECISION TEST & BURN-IN SOCKETS** for these parts, [click here](#).

ATTENTION: Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.

ABRACON IS
ISO 9001: 2008
CERTIFIED



Visit www.abracon.com for Terms & Conditions of Sale

Revised: 05.06.14

30332 Esperanza, Rancho Santa Margarita, California 92688

tel 949-546-8000 | fax 949-546-8001 | www.abracon.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

ABRACON:

[ABM8G-12.000MHZ-18-D2Y-T](#) [ABM8G-12.000MHZ-B4Y-T](#) [ABM8G-12.288MHZ-18-D2Y-T](#) [ABM8G-12.288MHZ-B4Y-T](#) [ABM8G-13.000MHZ-18-D2Y-T](#) [ABM8G-13.000MHZ-B4Y-T](#) [ABM8G-13.560MHZ-18-D2Y-T](#) [ABM8G-13.560MHZ-B4Y-T](#) [ABM8G-14.31818MHZ-18-D2Y-T](#) [ABM8G-14.31818MHZ-B4Y-T](#) [ABM8G-14.7456MHZ-18-D2Y-T](#) [ABM8G-14.7456MHZ-B4Y-T](#) [ABM8G-16.000MHZ-18-D2Y-T](#) [ABM8G-16.000MHZ-B4Y-T](#) [ABM8G-16.384MHZ-18-D2Y-T](#) [ABM8G-16.384MHZ-B4Y-T](#) [ABM8G-18.432MHZ-18-D2Y-T](#) [ABM8G-18.432MHZ-B4Y-T](#) [ABM8G-19.6608MHZ-18-D2Y-T](#) [ABM8G-19.6608MHZ-B4Y-T](#) [ABM8G-20.000MHZ-18-D2Y-T](#) [ABM8G-20.000MHZ-B4Y-T](#) [ABM8G-22.1184MHZ-18-D2Y-T](#) [ABM8G-22.1184MHZ-B4Y-T](#) [ABM8G-24.000MHZ-18-D2Y-T](#) [ABM8G-24.000MHZ-B4Y-T](#) [ABM8G-24.576MHZ-18-D2Y-T](#) [ABM8G-24.576MHZ-B4Y-T](#) [ABM8G-25.000MHZ-18-D2Y-T](#) [ABM8G-25.000MHZ-B4Y-T](#) [ABM8G-26.000MHZ-18-D2Y-T](#) [ABM8G-26.000MHZ-B4Y-T](#) [ABM8G-27.000MHZ-18-D2Y-T](#) [ABM8G-27.000MHZ-B4Y-T](#) [ABM8G-28.63636MHZ-18-D2Y-T](#) [ABM8G-28.63636MHZ-B4Y-T](#) [ABM8G-30.000MHZ-18-D2Y-T](#) [ABM8G-30.000MHZ-B4Y-T](#) [ABM8G-32.000MHZ-B4Y-T](#) [ABM8G-33.000MHZ-18-D2Y-T](#) [ABM8G-33.000MHZ-B4Y-T](#) [ABM8G-40.000MHZ-18-D2Y-T](#) [ABM8G-40.000MHZ-B4Y-T](#) [ABM8G-48.000MHZ-18-D2Y-T](#) [ABM8G-48.000MHZ-B4Y-T](#) [ABM8G-12.000MHZ-18-D2Y-T3](#) [ABM8G-12.000MHZ-B4Y-T3](#) [ABM8G-12.288MHZ-18-D2Y-T3](#) [ABM8G-12.288MHZ-B4Y-T3](#) [ABM8G-13.000MHZ-18-D2Y-T3](#) [ABM8G-13.000MHZ-B4Y-T3](#) [ABM8G-13.560MHZ-18-D2Y-T3](#) [ABM8G-13.560MHZ-B4Y-T3](#) [ABM8G-14.31818MHZ-18-D2Y-T3](#) [ABM8G-14.31818MHZ-B4Y-T3](#) [ABM8G-14.7456MHZ-18-D2Y-T3](#) [ABM8G-14.7456MHZ-B4Y-T3](#) [ABM8G-16.000MHZ-18-D2Y-T3](#) [ABM8G-16.000MHZ-B4Y-T3](#) [ABM8G-16.384MHZ-18-D2Y-T3](#) [ABM8G-16.384MHZ-B4Y-T3](#) [ABM8G-18.432MHZ-18-D2Y-T3](#) [ABM8G-18.432MHZ-B4Y-T3](#) [ABM8G-19.6608MHZ-18-D2Y-T3](#) [ABM8G-19.6608MHZ-B4Y-T3](#) [ABM8G-20.000MHZ-18-D2Y-T3](#) [ABM8G-20.000MHZ-B4Y-T3](#) [ABM8G-22.1184MHZ-18-D2Y-T3](#) [ABM8G-22.1184MHZ-B4Y-T3](#) [ABM8G-24.000MHZ-18-D2Y-T3](#) [ABM8G-24.000MHZ-B4Y-T3](#) [ABM8G-24.576MHZ-18-D2Y-T3](#) [ABM8G-24.576MHZ-B4Y-T3](#) [ABM8G-25.000MHZ-18-D2Y-T3](#) [ABM8G-25.000MHZ-B4Y-T3](#) [ABM8G-26.000MHZ-18-D2Y-T3](#) [ABM8G-26.000MHZ-B4Y-T3](#) [ABM8G-27.000MHZ-18-D2Y-T3](#) [ABM8G-27.000MHZ-B4Y-T3](#) [ABM8G-28.63636MHZ-18-D2Y-T3](#) [ABM8G-28.63636MHZ-B4Y-T3](#) [ABM8G-30.000MHZ-18-D2Y-T3](#) [ABM8G-30.000MHZ-B4Y-T3](#) [ABM8G-32.000MHZ-B4Y-T3](#) [ABM8G-33.000MHZ-18-D2Y-T3](#) [ABM8G-33.000MHZ-B4Y-T3](#) [ABM8G-40.000MHZ-18-D2Y-T3](#) [ABM8G-40.000MHZ-B4Y-T3](#) [ABM8G-48.000MHZ-18-D2Y-T3](#) [ABM8G-48.000MHZ-B4Y-T3](#) [ABM8G-16.000-4Y-T3](#) [ABM8G-18.432-4Y-T3](#) [ABM8G-13.560-4Y-T3](#) [ABM8G-25.000-4Y-T3](#) [ABM8G-40.000-4Y-T3](#) [ABM8G-11.0592-4Y-T3](#) [ABM8G-33.000-4Y-T3](#) [ABM8G-28.63636-4Y-T3](#) [ABM8G-20.000-4Y-T3](#) [ABM8G-13.000-4Y-T3](#)