


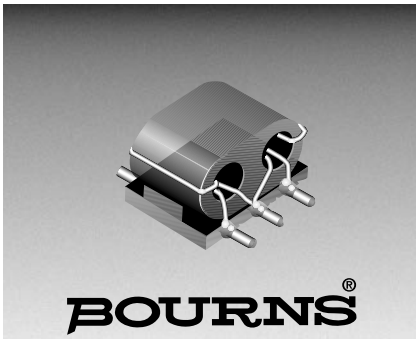

Features

- SMD gull-wing (two sizes)
- High frequency
- Low Z tolerance $\pm 10\%$

Applications


- Single antenna systems
- Master antenna systems
- Wideband communication systems
- SAT-systems
- Digital satellite broadcasting
- Used in antenna amplifiers

BRN Series - Chip Balun Transformers


Dimensions

	A	B	C	E	F
BRN-SBC-108	$\frac{6.0 \pm 0.3}{(.236 \pm .012)}$	$\frac{6.5 \pm 0.5}{(.256 \pm .020)}$	$\frac{4.2 \pm 0.5}{(.165 \pm .020)}$	$\frac{2.0 \pm 0.2}{(.079 \pm .008)}$	$\frac{5.8 \pm 0.3}{(.228 \pm .012)}$


Configuration

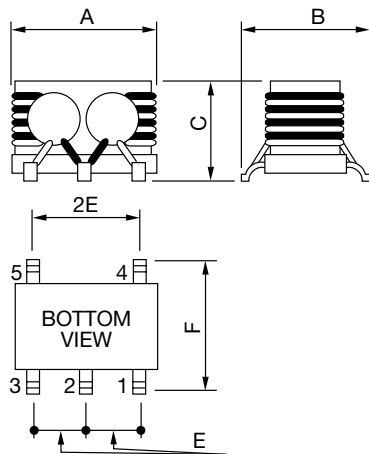

DIMENSIONS ARE: $\frac{\text{METRIC}}{(\text{INCHES})}$

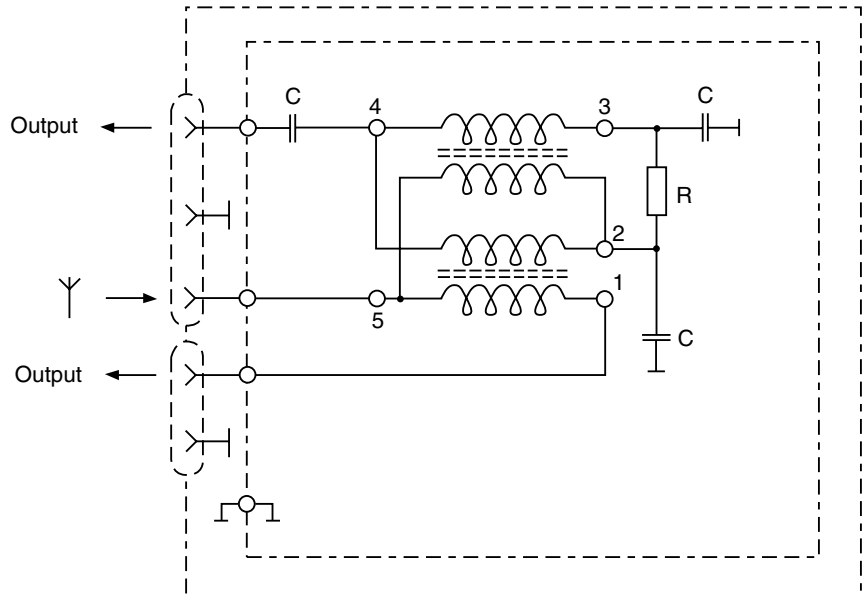

Schematic

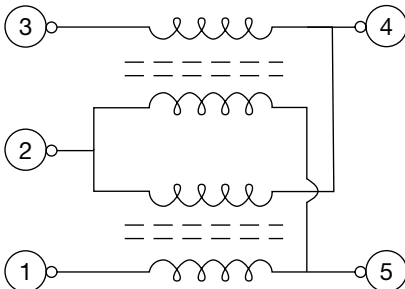


Direct distribution of high frequency energy by directional couplers

Electrical Data Z (4-5)

BRN-SBC-108	
47 MHz	160 Ω
230 MHz	270 Ω
470 MHz	275 Ω
860 MHz	290 Ω

BOURNS®

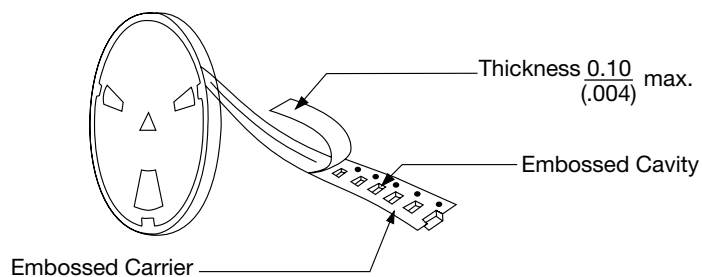


Model	Tape Size	A	B	C	G	N	T	Packaging
BRN-SBC-108	$\frac{16}{(.63)}$	$\frac{178}{(7.008)}$	$\frac{24.0 \pm 1}{(.945 \pm .039)}$	$\frac{13.0 \pm 0.5}{(.512 \pm .020)}$	$\frac{18}{(.709)}$	$\frac{50^0}{(1.969^0)}$	$\frac{22.4}{(.882)}$	500 pcs. per Reel

DIMENSIONS ARE: $\frac{\text{METRIC}}{(\text{INCHES})}$

Diagram illustrating the application of the Top Cover Tape and Base Tape. The Top Cover Tape is applied at an angle of 165° to 180° relative to the Base Tape.

Paper
Plastics

The force for tearing off cover tape is 10 to 130 grams in the arrow direction.

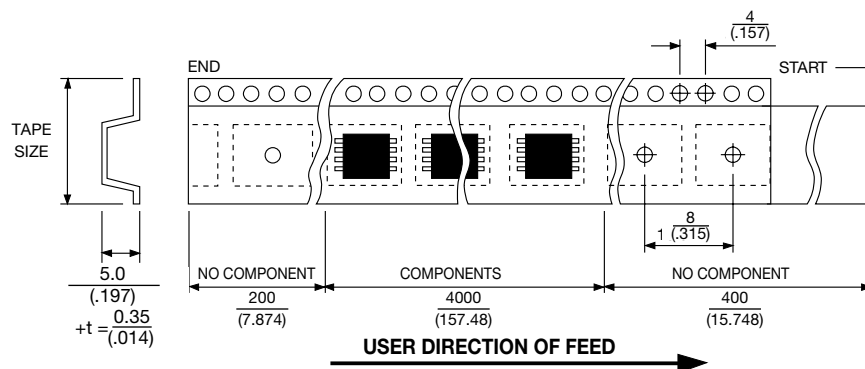

Specifications are subject to change without notice.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Bourns:

[BRN-SBC-108L](#)