



# 610-012 Direct Coupling "E" Nut



61

## CONNECTOR DESIGNATORS A-B\*-C-D-E-F G-H-J-K-L-S

\* Conn. Desig. B See Note 2  
DIRECT COUPLING

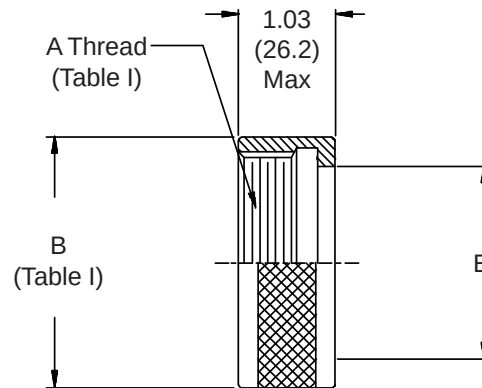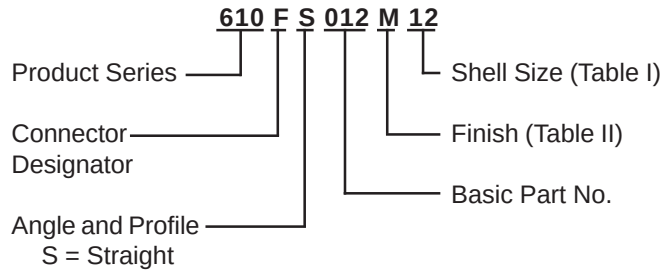

See inside back cover fold-out or pages 13 and 14 for Tables I and II.

TABLE III: CABLE ENTRY

| Shell Size | E Dia Ref    |
|------------|--------------|
| 08/09      | .250 (6.4)   |
| 10/11      | .303 (7.7)   |
| 12/13      | .408 (10.4)  |
| 14/15      | .490 (12.4)  |
| 16/17      | .609 (15.5)  |
| 18/19      | .730 (18.5)  |
| 20/21      | .870 (22.1)  |
| 22/23      | .978 (24.8)  |
| 24/25      | 1.090 (27.7) |
| 28/29      | 1.250 (31.8) |
| 32/33      | 1.520 (38.6) |
| 36         | 1.756 (44.6) |

1. Metric dimensions (mm) are indicated in parentheses.
2. When using Connector Designator B refer to pages 18 and 19 for part number development.