
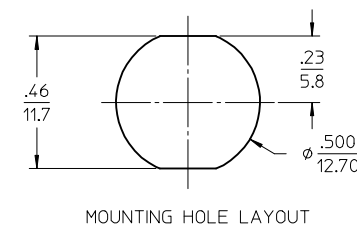
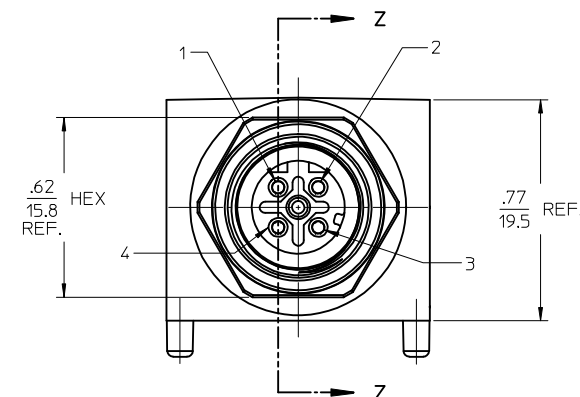
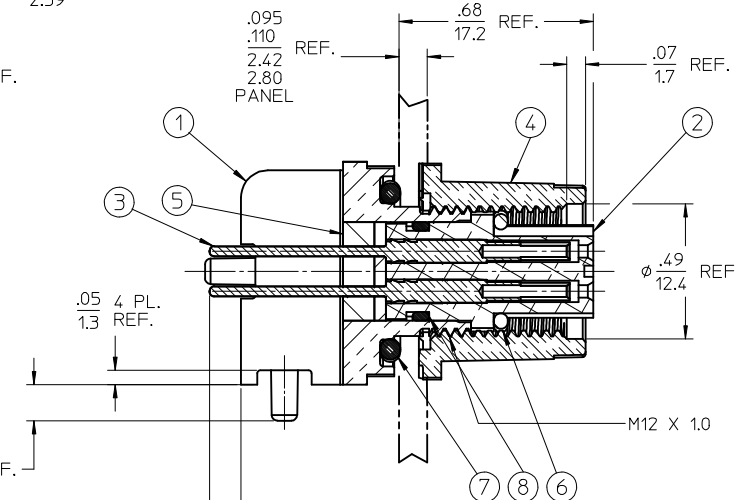
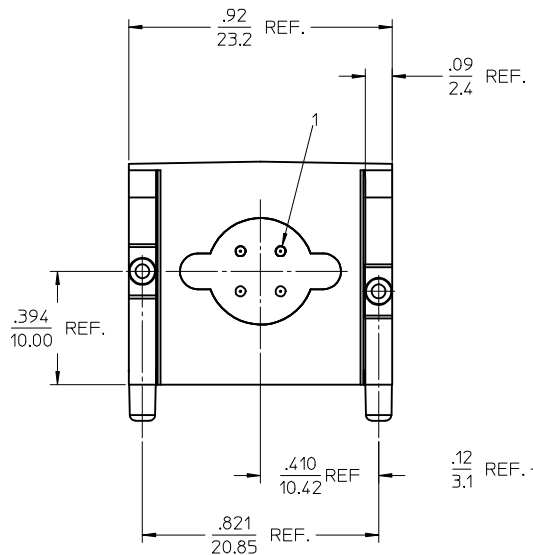
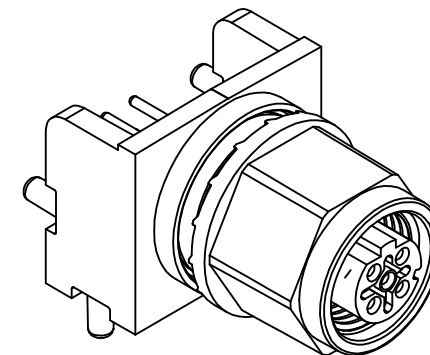
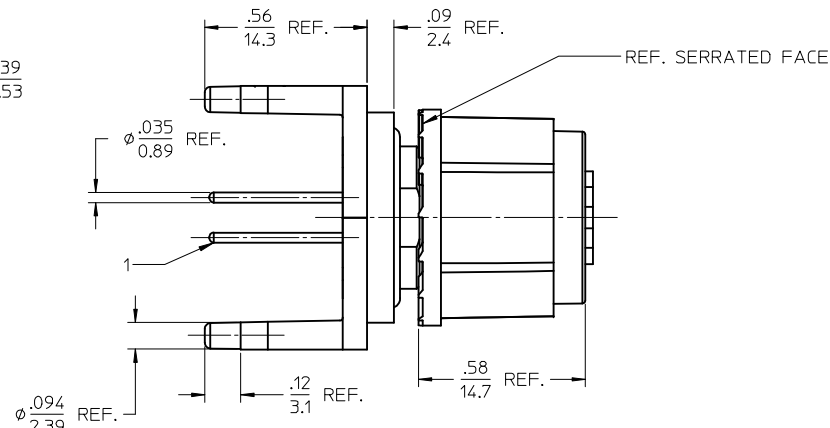


MATERIAL NO.	ENGINEERING NO.
1302990200	130299-0200

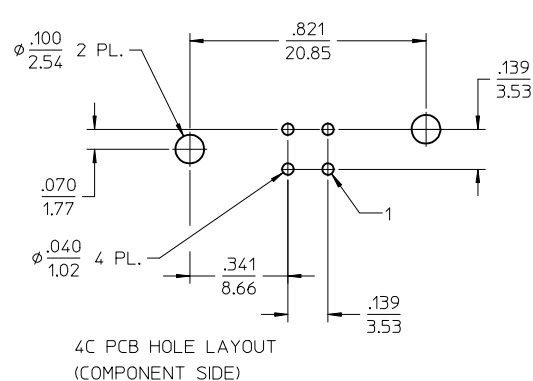

- NOTES:
1. MATERIAL: SEE TABLE
 2. FINISHES: SEE TABLE
 3. PRODUCT SPEC: PS-130299-001
 4. PACKAGING: PK-130299-001
 5. MATES WITH: MALE D-CODE CABLE ASSEMBLY
 6. ELECTRICAL SPECS:
VOLTAGE: 250V AC/DC
CURRENT: 4 AMPS
 7. PROTECTION: IP67
 8. ASSEMBLY IS RoHS COMPLIANT

ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH
8	1	INSULATOR O-RING	VITON	BROWN
7	1	PANEL O-RING	VITON	RED
6	1	MATING O-RING	VITON	RED
5	A/R	POTTING COMPOUND	EPOXY	BLACK
4	1	PANEL NUT	ZINC (DIE-CAST)	CHROME/DUPLEX NICKEL
3	4	CONTACT SOCKET	BRASS	GOLD PLATED
2	1	4/C D-CODE INSULATOR	PUR	BLACK
1	1	RECEPTACLE SHELL, M12	ZINC (DIE-CAST)	WHITE BRONZE PLATING

REV	DESCRIPTION
D	POTTING WAS RED EC NO: IPG2017-0514 DRWN:MBRZOWSKI 2016/11/21 CHKD: APPR:APATEL 2016/12/05

QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)
$\nabla=0$	mm INCH
$\nabla=0$	4 PLACES $\pm .005$ $\pm .005$
	3 PLACES $\pm .010$ $\pm .010$
	2 PLACES $\pm .013$ $\pm .010$
	1 PLACE $\pm .03$ $\pm .010$
	ANGULAR $\pm 2^\circ$
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
IN/MM	3:1	INCH	
DRAWN BY	DATE	TITLE	
RSTONE	2010/05/17	MIC PCB RECEPTACLE 4C, D-CODE, STRAIGHT	
CHECKED BY	DATE		
K. JOZWIK	2010/05/25		
APPROVED BY	DATE		
JFMURPHY	2010/05/20		
MATERIAL NO.	DOCUMENT NO.		
SEE CHART	SD-130299-006		
SIZE			
C			

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	SHEET NO.
	1 OF 1